


# Lidcombe

## Location

Lidcombe is at 16.337km.

## Diagram

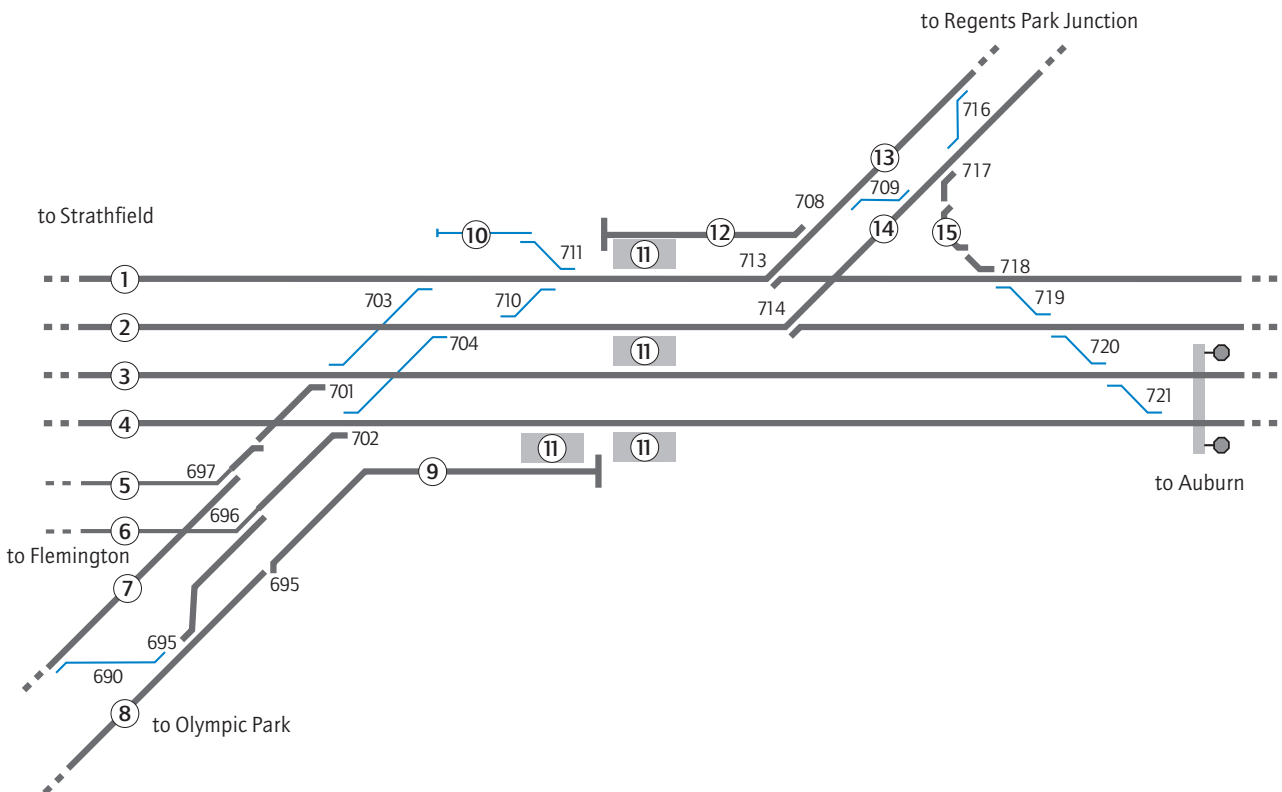

### KEY

1 Down Suburban line	6 Up Enfield West Fork line	11 Lidcombe
2 Up Suburban line	7 Down Homebush Bay West Fork line	12 Turnback road
3 Down Main line	8 Up Homebush Bay West Fork line	13 Down Main South line
4 Up Main line	9 Shuttle road	14 Up Main South line
5 Down Enfield West Fork line	10 Cemetery siding 178m	15 Triangle Loop line 178m

## Lidcombe

### Network Control

Signaller at Homebush Control Centre (Lidcombe panel)

---

### Yard limits

Lidcombe is within Strathfield yard limits.

---

### Location details



Interlocked points are operated from Strathfield signal box.

■ 17.337km Lidcombe. Platforms 0, 1, 2 and 3, 4 and 5

---

### Level crossings

📍 17.804km Network access

---

### Special instructions

#### Maintenance Window Local Possession Authority (LPA)

During Maintenance Window LPA's (MW9, MW12, and MW14), a worksite may be established within 500 metres of the LPA limit for maintenance activities, inspections and testing if:

- points can be secured to prevent access to the portion of track within the LPA,
- or a Work On Track Authority for the track adjoining the LPA limit has been authorised for the period of work.

In exception to *NWT 302 Local Possession Authority*, if a set of points cannot be secured to prevent access to the portion of track or a Work On Track Authority adjoining the LPA limit is not authorised, a worksite may be established within 500 metres of the LPA limit, under the following conditions


The work within 500 metres of the LPA limit must not;

- require a work on track authority
- break the track
- alter the track geometry or structure.

Work within 500 metres of the LPA limit is limited to;

- work not requiring tools, or
- work using tools which can be easily and immediately removed from the track by one person and are:
  - light, non-powered hand tools
  - light, battery powered tools or devices.

## Lidcombe

 NOTE: An additional Qualified Worker must be provided to make sure that workers remain within the worksite limits.

Points that are clipped and locked to protect a Maintenance Window LPA may be unclipped in accordance with NSG 616 *Precautions during signalling equipment testing*.

---

### Related documents

*NLA 110 Central-Lidcombe*  
*NLA 114 Strathfield*  
*NLA 116 Flemington*  
*NLA 118 Olympic Park*  
*NLA 200 Lidcombe-Penrith*  
*NLA 500 Lidcombe-Campbelltown*  
*NLA 612 Campsie-Flemington*

---

### Effective date

5 October 2018