

DOCUMENT NO.	D2020/8570
WORK DESCRIPTION	Routine network maintenance activities – Macdonaldtown Stabling Yard
WPP Number	CE4B MSY12954
SCOPE:	<p>This SWI is applicable for the worksite protection arrangements using lookout working concerning routine network maintenance, defect management and repair of assets within the limits specified below and in the attached plan.</p> <p>Work activities include:</p> <ul style="list-style-type: none"> Routine preventative and corrective work such as inspections and maintenance as appropriate for the type of protection being applied as part of this plan.
AUTHORISATIONS:	<p>Protection Officer: Protection Officer Level 1 or higher</p> <p>Lookout: Hand signaller Level 1 or higher or Protection Officer Level 1 or higher.</p>
SAFETY CONTROLS: Lookout working arrangements	<p>The nominated worksite location is: Macdonaldtown Stabling Yard Sidings 1 to 6 to 660 Points and Turn Back Road end of terminal line.</p> <p>The nominated worksite location for Lookout Working is a moving worksite, where workers are working along the track within the limits of the nominated worksite location up to the where the Lookout is established.</p> <p>As work moves along the track, the Protection Officer must assess the new location and:</p> <ul style="list-style-type: none"> Establish Lookouts as required to watch for approaching rail traffic from all entry points Designate and instruct which safe places the workers are to use as the work is completed along the work route within the worksite limits.
PRESTART REQUIREMENTS:	<p>Protection Officer assessment checklist must be completed before instructions in this SWI are followed.</p> <p>Tools and equipment required:</p> <ul style="list-style-type: none"> Protection Officer requires a phone to contact the Signaller. Lookouts require a high-visibility arm sleeve and a whistle/horn.
FURTHER INFORMATION:	<p><i>NWT 300 Planning work in the Rail Corridor</i></p> <p><i>NWT 310 Lookout Working</i></p> <p><i>NPR 711 Using Lookouts</i></p> <p><i>NPR 751 Calculating Minimum Warning Time</i></p> <p><i>NPR 712 Protecting work from rail traffic on adjacent lines</i></p> <p><i>NGE 200 Walking in the Danger Zone</i></p> <p><i>NLA 100 Central</i></p> <p><i>Lookout Working Prohibited Locations Register</i></p>

Safe Work Instruction**Lookout Working Worksite Protection for Macdonaldtown Stabling Yard
routine network maintenance activities****Protection Officer assessment checklist**

Protection Officer's name:		Yes (Tick if Yes)
This document has not expired 12 months beyond the issue date.		
SWI details and protection arrangements have been reviewed and validated for the assessed worksite location, including: <ul style="list-style-type: none"> On-site safety assessment has been completed for relevancy of works being undertaken The required protection details, environment and tasks are unchanged from the details of this SWI 		
The Protection Officer and Qualified Workers deploying qualifications are current and have practiced in the last 6 months. If not practiced, then a Rail Safety Coach must be contacted for guidance.		
Corridor Safety Number	Protection Officer Signature	Date

**Warning**

If an above item does not apply, the Protection Officer must not use this Safe Work Instruction. A new worksite protection plan must be completed in accordance with NRF 014 Worksite Protection Pre-work briefing and NRF 015 Worksite Protection Plan.

Safe Work Instruction

**Lookout Working Worksite Protection for Macdonaldtown Stabling Yard
routine network maintenance activities**



Worksite Protection Pre-work Briefing

Briefing date: / /

Protection Officer details

name signature contact No.

Work location:

Scope of work:

Worksite protection: Refer to Worksite Protection Plan for details

Hazards (e.g. Site specific hazards identified, including physical environment, human errors, plant and equipment)	Controls (to be implemented to eliminate or reduce the risk to the lowest practicable level)	Person responsible for Control
Approaching rail traffic	Lookouts must be trained and competent to perform lookout duties. Lookouts must be rotated if performing lookout for extended periods of time Workers to remain within worksite limits as set out in this procedure. Lookouts must be placed as per protection plan attached to this document. Workers are to stop work and move to a safe place immediately on being warned by the lookouts	Protection Officer and Lookout
Live adjacent lines	Lookouts must provide warning to workers when rail traffic is approaching from the adjacent line in either direction.	Protection Officer and Lookout
Two - way running / multiple entry points into worksite	One Lookout placed watching each direction before work starts. Lookouts are to warn workers of approaching rail traffic, including rail traffic entering or travelling within the worksite. Workers are to stop work and move to a safe place.	Protection Officer and Lookout
Obstruction to Minimum Sighting Distance	Lookouts must provide warning to the workers whenever their line of sight is obstructed by passing rail traffic. Workers must stop work and move to a safe place and reassess positioning and method	Protection Officer and Lookout
Adjoining/Surrounding Worksites	Lookouts must have two independent audible warning devices that can be heard by workers over any noise generated by adjoining/surrounding worksites. Lookouts are to provide warning if their line of sight is obstructed by adjoining/surrounding worksites.	Protection Officer and Lookout
Access to / Egress from worksite Slips, trips, falls and hazards carrying equipment	Access and egress points must be agreed prior to entering the danger zone, consideration should be given to ease of access and safest possible entry and exit points. Protection Officer will assess and instruct when it is safe for workers to use <i>NGE 200 Walking in the Danger Zone</i> to move to the worksite or safe place.	All

Safe Work Instruction

**Lookout Working Worksite Protection for Macdonaldtown Stabling Yard
routine network maintenance activities**



Worksite Protection Plan – Lookout Working

Signaller Details

<input type="text" value="name"/>	<input type="text" value="Illawarra Panel"/>	<input type="text" value="02 9701 1562"/>
-----------------------------------	--	---

Protection Officer Details

<input type="text" value="name"/>	<input type="text" value="signature"/>	<input type="text" value="contact No."/>
<input type="text" value="RSW or RIW No."/>	<input type="text" value="designation"/>	Planned duration <input type="text"/>

Workplace Supervisor details:

Type of work:

Worksite location

on the	<input type="text" value="Siding 1 - 6"/>
on the	<input type="text" value="Turnback Road"/>
between	<input type="text" value="660 points"/> and <input type="text" value="Sidings 1 – 6 End of terminal line"/>

Worksite assessment

Has the Lookout Working Prohibited Locations Register been consulted? Yes

Warning method


Minimum Warning Time Calculations

Maximum track speed

Number of Lookouts used Position of Lookouts to

Number of additional Lookouts* used Position of Lookouts to

Note - Lookouts are relocated to positions within these KMs as workers move along the worksite.

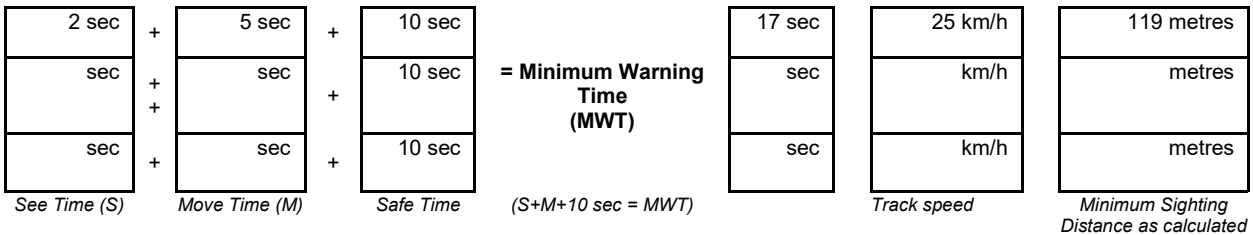

Note – Additional MWT calculations can be recorded in the Protection Officer's Diary.

Where are the safe places identified for the Lookouts and the workers?

Lookouts:

Workers:

Ensure the workers have been briefed about these work details Yes

Diagrams, notes, and detailed instructions are over the next pages. These are to be read and followed as part of this worksite protection plan for Lookout Working.

Safe Work Instruction

**Lookout Working Worksite Protection for Macdonaldtown Stabling Yard
routine network maintenance activities**

INSTRUCTIONS:	<ol style="list-style-type: none"> 1. Workers enter through the Burren street access gate and walk into the site office. 2. Protection Officer talks to the onsite Qualified Worker about rail traffic movements and other works in the nominated worksite. 3. Protection Officer contacts Illawarra Panel and tells the Signaller about the use of Lookout Working. 4. Protection Officer briefs workers about the worksite protection arrangements. 5. Lookouts are established just outside of the facility on the walkway safe places. 6. Workers start work up to the Lookout position. 7. Workers stop work and move to a safe place when they reach the Lookout. 8. Lookouts are relocated at the next signal or points to achieve minimum sighting distance. 9. Repeats steps 6 – 8 until the work is complete. 10. All workers move to a safe place and exit the worksite. 11. Protection Officer tells the onsite Qualified Worker that work is complete. 12. Protection Officer contacts Illawarra Panel Signaller and ends Lookout Working.
----------------------	---

ADDITIONAL DETAILS	<p>Stabled rail traffic on any tracks in Macdonaldtown Stabling Yard may obstruct the Lookouts minimum sighting distance requirements. When this hazard is identified, workers must stop work and move to a safe place until the Protection Officer makes an assessment and relocates Lookouts to achieve the required minimum sighting distance. Tracks are to be treated as bi-directional. Stabled rail traffic may move in any direction at any time.</p>
---------------------------	--

WORKSITE	 <p>Image 1: Sidings 1-6 end of terminal lines.</p>	 <p>Image 2: 660 points and Turn Back Road end of terminal line.</p>
-----------------	--	--

ACCESS	 <p>Image 3: Burren St access gate</p>	 <p>Image 4: Site office and facility entry / exit doors</p>
---------------	--	---

FIRST AID and EMERGENCY ASSEMBLY POINT	 <p>Image 5: Burren St access gate assembly point</p>	 <p>Image 6: Site office first aid kit locations</p>
---	---	---

Diagram

