

26

weekly notice

Monday, 20 June 2022
Sunday, 26 June 2022



See online for all Safeworking Information

www.railsafe.org.au

Safeworking information, including Weekly Notices and SAFE Notices, is available on the RailSafe website.

By accessing Weekly Notices and SAFE Notices online, you will receive safety information more quickly. Weekly Notices remain on the RailSafe website for two years; Permanent and Temporary SAFE Notices remain online as long as they are current.

Anyone needing back issues of Weekly Notices and SAFE Notices should contact the Network Rules unit.

If you are outside Sydney Trains, you can reach the RailSafe website via the following address:

www.railsafe.org.au

Other Safeworking documents, such as Network Rules, Network Procedures, Network Local Appendices, Safeworking Policies, SafeTracks flyers, and contractor information are also available online.

**Director Network Standards, Systems & Quality
Sydney Trains**

Continued on next page

CONTENTS

PUBLICATION DEADLINES AND SUBMISSION OF ARTICLES	4
HURSTVILLE (ILLAWARRA MAIN) – MTMS2 FINAL – COMMISSIONING OF 984A/B POINTS CROSSOVER, 993 CATCHPOINTS & 984/993 EOLS AND PERMANENTLY BOOK OUT 989A/B POINTS CROSSOVER & EOL (DIAGRAM)	5
FROM CENTRAL TO ST. LEONARDS, STANMORE, TURRELLA, AND KOGARAH - COMMISSIONING OF AUTOMATIC TRAIN PROTECTION (ATP) ETCS LEVEL 1 LIMITED SUPERVISION (DIAGRAM)	8
CLARENDON – TRANSPOR(DIAGRAM)T ACCESS PROGRAME - EMERGENCY OPEARTION AND BLOCKING KEYS RELOCATION WORKS	12
BANKSTOWN TO YAGOONA - MARIYUNG (NIF) AC FEEDERS STAGE 2 – 713 FEEDER	13
MTMS2 – HURSTVILLE – SPEED SIGN CHANGES	14
CARINGBAH – KINGSWAY OVERBRIDGE BRIDGE REFURBISHMENT (CARINGBAH STATION)	16
MARRICKVILLE (B7+152) – LIVINGSTONE RD BRIDGE TEMPORARY PORTAL STRUCTURE INSTALLATION	17
WOLLI CREEK – TOC UPDATE	18
REDFERN – TOC UPDATE	19
STATUS OF TOM NOTICES	21
STATUS OF PERMANENT SAFE NOTICES	23
STATUS OF NETWORK MANUALS AND FORMS	24
DISTRIBUTION OFFICERS	26

PUBLICATION DEADLINES AND SUBMISSION OF ARTICLES

Dates of the next three Weekly Notices and deadlines for articles are:

<i>Weekly Notice</i>	<i>For Week</i>	<i>Deadline</i>
27	27/06/2022 – 03/07/2022	31/05/2022
28	04/07/2022 – 10/07/2022	07/06/2022
29	11/07/2022 – 17/07/2022	14/06/2022

To meet printing and distributing schedules, articles for a Weekly Notice must be received by its deadline.

Articles submitted after a deadline will be published in the next issue of the Weekly Notice. This may result in information not being distributed in time for it to be acted upon.

When submitting articles, please include your name, position title, telephone numbers and email address at the end of the articles as shown below:

Steve Swanson

Network Rules Specialist

Tel: 02 8922 4183 (external) 2 4183 (internal)

Email: stephen.swanson@transport.nsw.gov.au

HURSTVILLE (ILLAWARRA MAIN) – MTMS2 FINAL – COMMISSIONING OF 984A/B POINTS CROSSOVER, 993 CATCHPOINTS & 984/993 EOLS AND PERMANENTLY BOOK OUT 989A/B POINTS CROSSOVER & EOL

Commencing at 0200 hours on **Saturday, 2 July 2022**, and continuing until 0200 hours on Monday, 4 July 2022, the following works will be carried out:

- Removal of Hurstville Fixed Red Signal and Trainstop (Hurstville Station Platform 4).
- Recover signage from SM915 & SM917 Signal
- Installation of new X45 speed board on Down Illawarra Main at **14.600Km.**
- Removal of **X35** speed board on Down Illawarra Main at 15.090Km.
- New SM918 Signal, SM918 Co-acting signal and Trainstop.
- Relocation of signal ahead sign for SM918.
- New 918 Guards indicator (1) & (2) on platform 4 unbagged and brought into service.
- Removal of the entire SM929 Signal Theatre Route Indicator and only "UL" route is removed from SM929 Stencil Route Indicator.
- Removal of 'UL' route from SM931 Stencil Route Indicator.
- Modification of SM936 Bottom 3 aspect signal head with the addition of a low speed indication with Yellow + Red + Green (Lspd) profile.
- New SM936 Position Light junction indicator unbagged and brought into service.
- Conversion of SM938 bottom head signal from a 3 aspect head to 4 aspect head with the addition of a low speed indication with Green + Yellow + Red + Green (Lspd) profile

- Conversion of SM940 Signal from incandescent to LED with Stencil Route Indicator removed.
- Removal of SM942 Signal Stencil Indicator.
- Conversion of SM946 bottom head signal from 2 to 3 aspect signal head in addition of Green aspect with Green + Yellow + Red profile.
- Relocation of 917 ITS(1) Trainstop.
- New 936/938 ITS(1) & ITS(2) Trainstop.
- Commission of 984A/B points and 993 catch points and EOL box into service.
- 989 A/B point machines clipped, XL locked, spiked & detected in the normal position in 938AT and 940BT track circuit. Loss of point normal detection will drop 938AT and 940BT tracks.
- Conversion of 909BT & 920AT TI21 track circuit to JS DR
- Alteration to existing 915AT, 915BT and 938CT track circuit
- ATRICS display updated to show 984A/B Crossover and 993 Catch point in service and 989A/B Crossover removed.
- New HVLA984B_DNIA_0_F, HVLA984B_DNIA_1_F, HVLSM917_UPIA_0_F, HVLSM917_UPIA_1_F, HVLSM929_UPIA_0_C and HVLSM292_UPIA_1_F balise.
- Removal of HVLSM917_UPIA_0_C, HVLSM917_UPIA_1_F, HVL01472_DNIA_1_F, HVL01472_DNIA_0_F, HVL01474_UPIA_1_F, HVL01474_0_F, HVL989B_UPIL_1_F, HVL989B_UPIL_0_F, HVL989A_UPIL_0_F, HVL989A_UPIL_1_F, HVL989A_UPIA_0_F and HVL989A_UPIA_1F balise.
- A driver's diagram with the altered arrangement is provided with this weekly notice.

VER14012022
DIAGRAM VER14012022

Mark Skribins

Signalling Commissioning Manager

Mob: +61 412 520 806

Email: mark.skribins@jhg.com.au

Gerald Chin


Principal Signalling Engineer

Mob: +61 435 631 133

Email: gerald.chin@wsp.com

TO SYDNEY


TO HURSTVILLE



911	(M)A	DN LOCAL	—
	(S)A	DN LOCAL	DL
	(M)B	UP LOCAL	—
	(S)B	UP LOCAL	UL

909	(M)A	DN MAIN	—
	(S)A	DN MAIN	DM
	(M)B	UP MAIN	—
	(S)B	UP MAIN	UM

921	(S)A	DN LOCAL	DL
	(M)B	UP LOCAL	—
	(S)B	UP LOCAL	UL

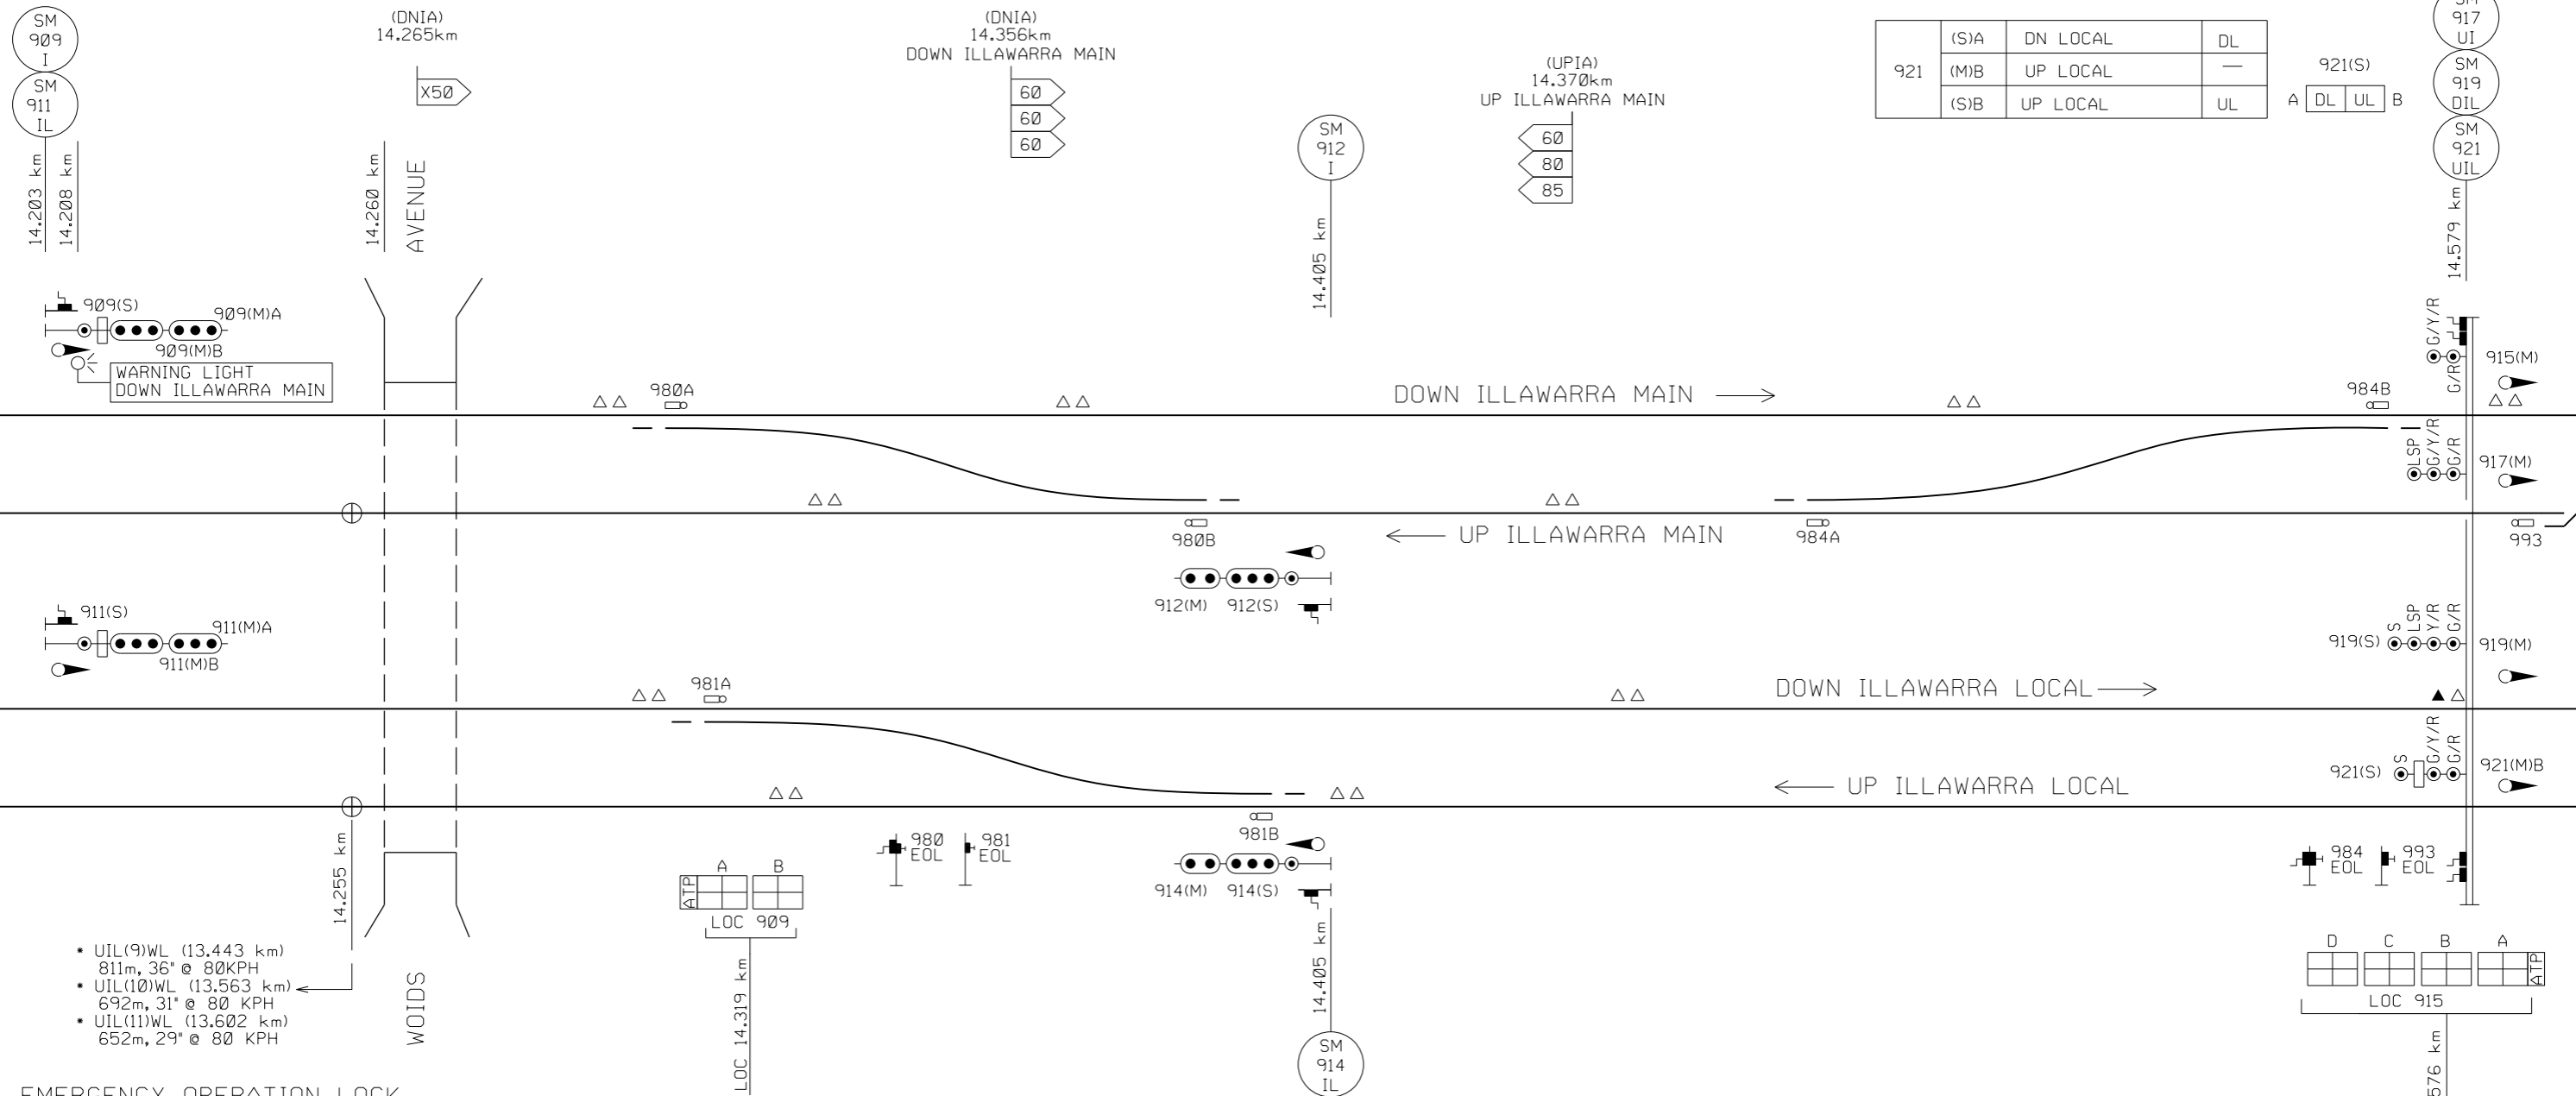

- UIL(9)WL (13.443 km) 811m, 36° @ 80KPH
- UIL(10)WL (13.563 km) 692m, 31° @ 80 KPH
- UIL(11)WL (13.602 km) 652m, 29° @ 80 KPH

EMERGENCY OPERATION LOCK
MOUNTED IN CUPBOARD SECURED WITH SL LOCK
RELEASES FORTRESS KEY FOR POINTS MOTOR

POINT ARRANGEMENTS


POINTS No.	POINTS TYPE	DUAL 84M LEVER BALL BEARING REMOVED	NUMBER OF BACKDRIVES	BEARERS	MECHANICAL DRIVE	EMERGENCY OPERATION					INTERLOCKING BALL BEARING REMOVED	WIDE CUT NOTCH POSITION	FPL REMOVED
						TYPE	EOL INDEX ESML WARDING	MACHINE INDEX	LOCATION	INSCRIPTION			
980A	WBS D84 MKIII	NO	1	IN-BEARER	SPHEROLOCK	EOL KEY	A-H	A-H	909	HURSTVILLE EOL & 980A PTS. MOTOR			
980B	WBS D84 MKIII	NO	1	IN-BEARER	SPHEROLOCK	EOL KEY	A-H	A-H	909	HURSTVILLE EOL & 980B PTS. MOTOR			
981A	WBS D84 MKIII	NO	1	IN-BEARER	SPHEROLOCK	EOL KEY	A-D	A-D	909	HURSTVILLE EOL & 981A PTS. MOTOR			
981B	WBS D84 MKIII	NO	1	IN-BEARER	SPHEROLOCK	EOL KEY	A-D	A-D	909	HURSTVILLE EOL & 981B PTS. MOTOR			
984A	SIEMENS D84 MKIII		1	IN-BEARER	SPHEROLOCK	EOL KEY	A-K	A-K	915	HURSTVILLE EOL & 984A PTS. MOTOR	NO	N/A	N/A
984B	SIEMENS D84 MKIII		1	IN-BEARER	SPHEROLOCK	EOL KEY	A-K	A-K	915	HURSTVILLE EOL & 984B PTS. MOTOR	NO	N/A	N/A
993	SIEMENS D84 MKIII		-	IN-BEARER	SPHEROLOCK	EOL KEY	A-J	A-J	915	HURSTVILLE EOL & 993 PTS. MOTOR	NO	N/A	N/A



HURSTVILLE (ILLAWARRA MAIN) - MTMS2 STAGE FINAL
PART SIGNALLING ARRANGEMENT
SHEET 1 OF 4

TO SYDNEY

TO PENSHURST

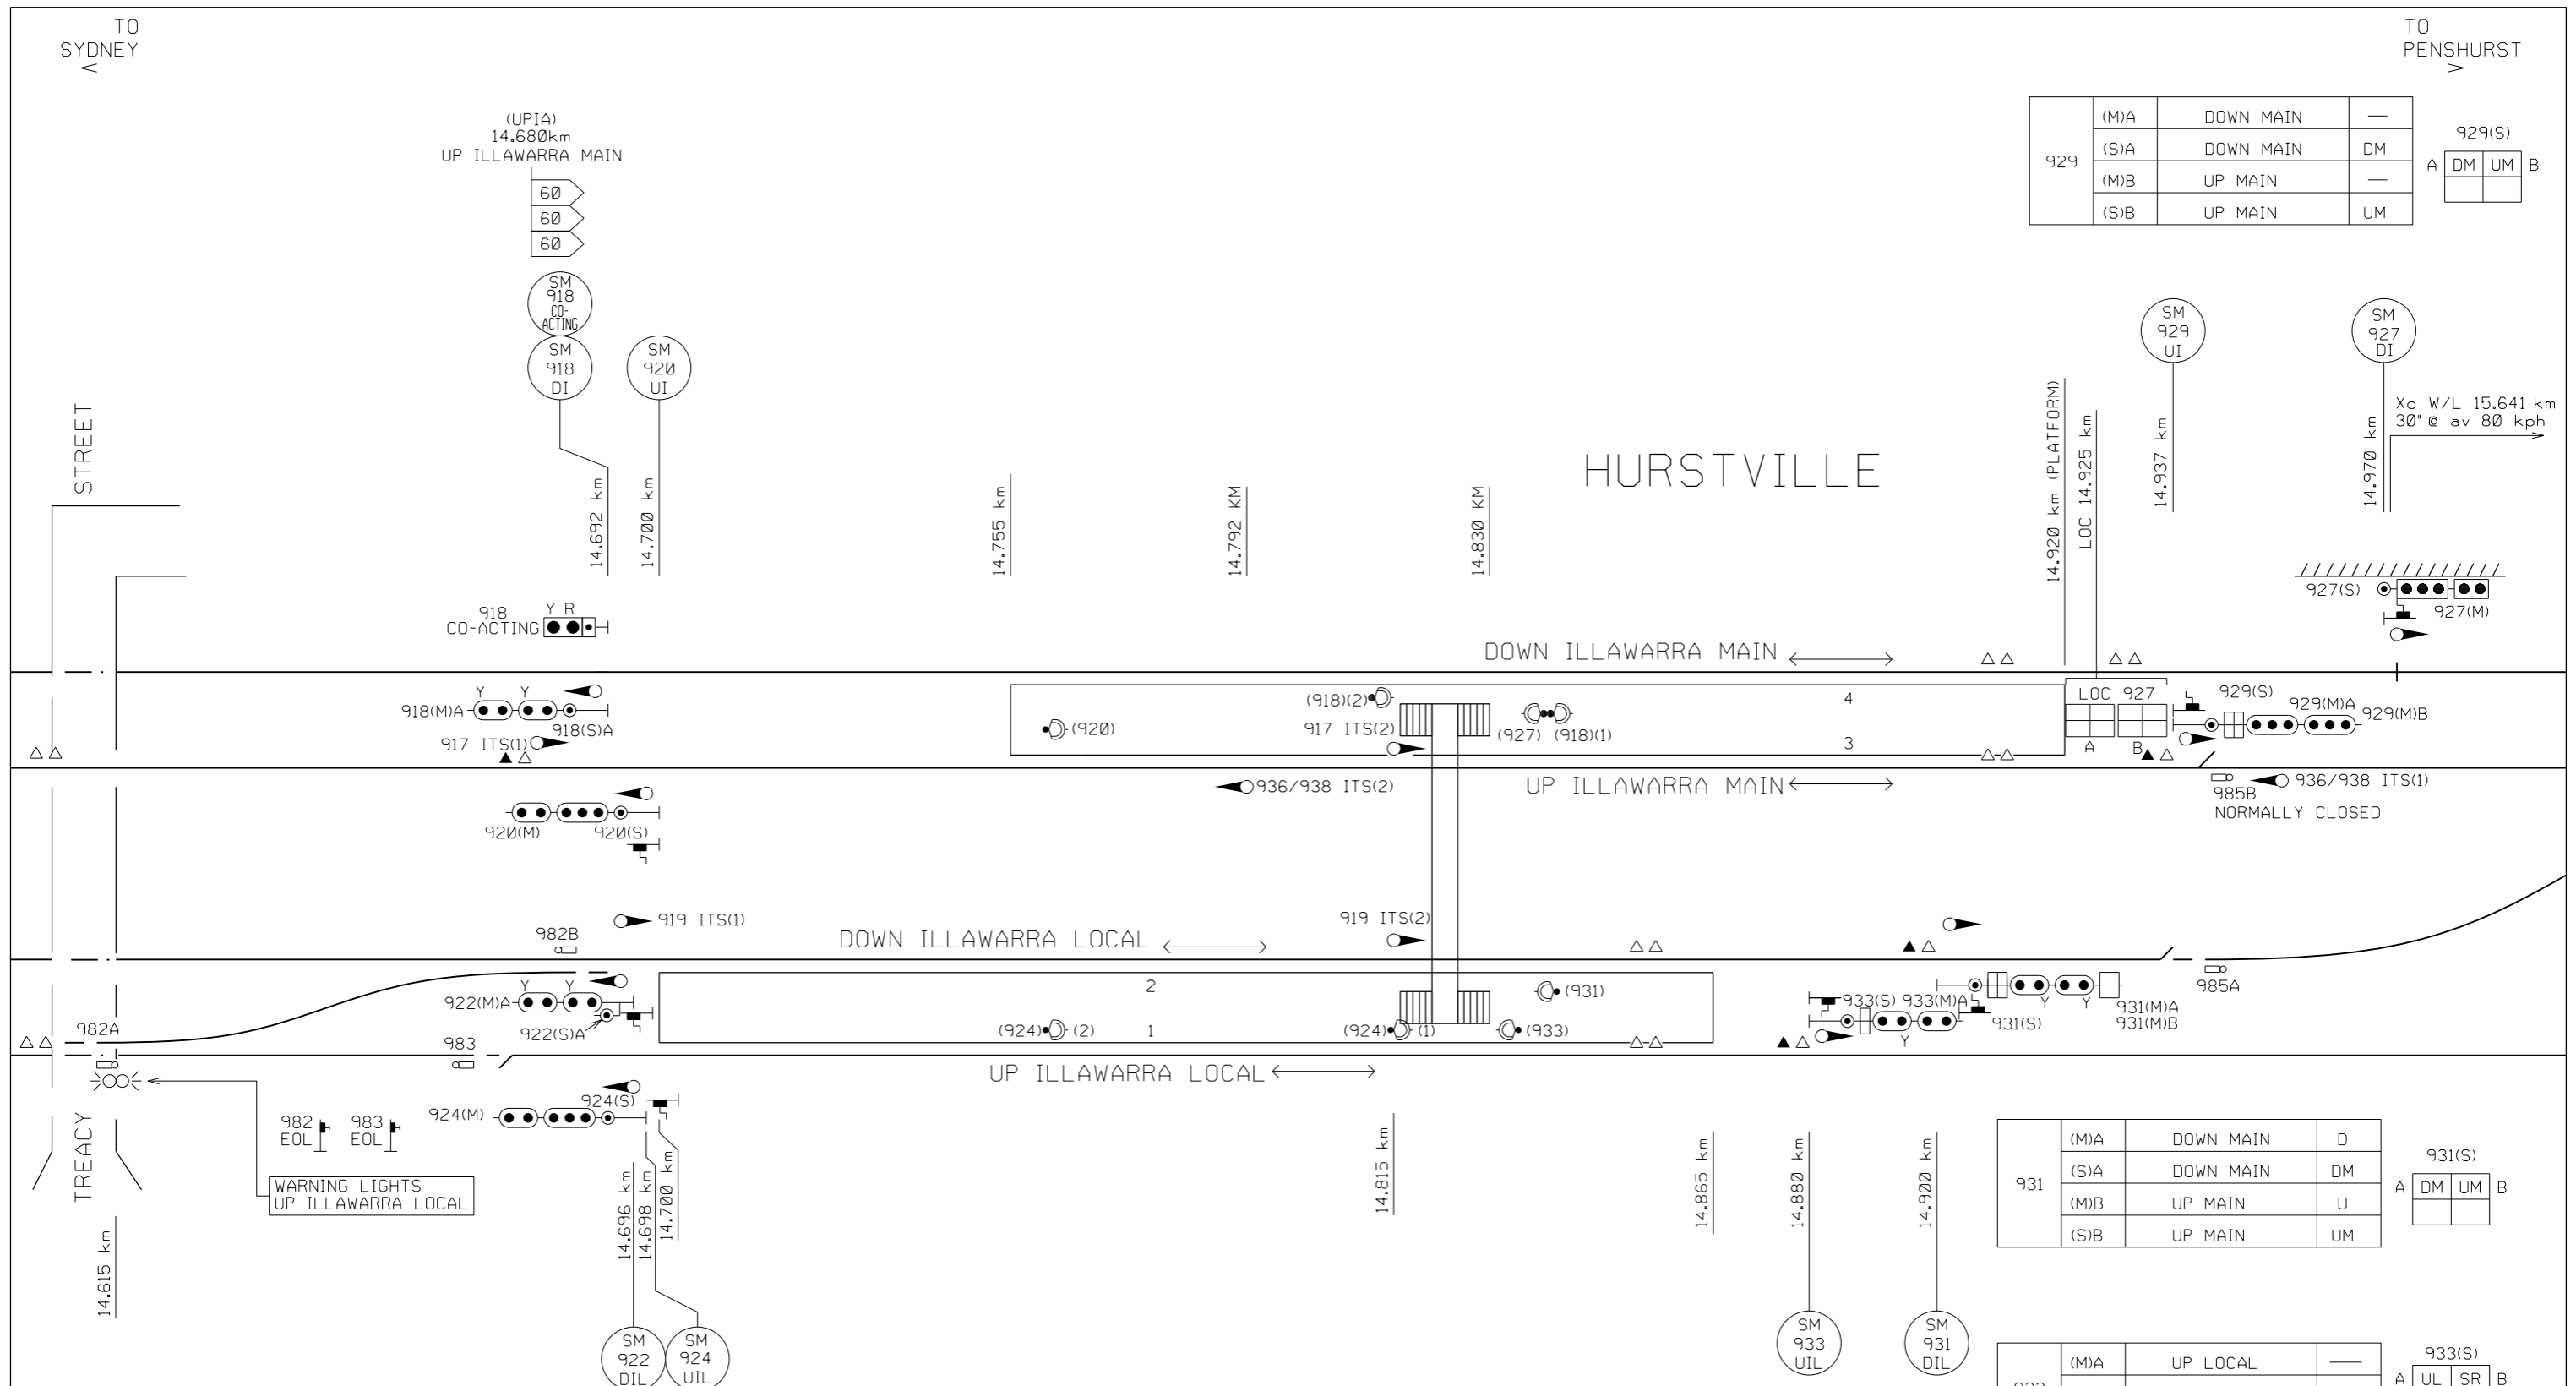

929	(M)A	DOWN MAIN	—	929(S)	A	DM	UM	B
	(S)A	DOWN MAIN	DM					
	(M)B	UP MAIN	—					
	(S)B	UP MAIN	UM					

931	(M)A	DOWN MAIN	D	931(S)	A	DM	UM	B
	(S)A	DOWN MAIN	DM					
	(M)B	UP MAIN	U					
	(S)B	UP MAIN	UM					

933	(M)A	UP LOCAL	—	933(S)	A	UL	SR	B
	(S)A	UP LOCAL	UL					
	(S)B	STABLING ROAD	SR					

EMERGENCY OPERATION LOCK
MOUNTED IN CUPBOARD SECURED WITH SL LOCK
RELEASES FORTRESS KEY FOR POINTS MOTOR


POINTS TYPE	POINTS	INDEX	KEY	INSCRIPTION
WBS D84M MKIII	982A	AE	FORTRESS	HURSTVILLE EOL AND 982A PTS MOTOR
WBS D84M MKIII	982B	AE	FORTRESS	HURSTVILLE EOL AND 982B PTS MOTOR
WBS D84M MKIII	983	AF	FORTRESS	HURSTVILLE EOL AND 983 PTS MOTOR

EMERGENCY OPERATION LOCK
MOUNTED IN CUPBOARD SECURED WITH SL LOCK
RELEASES FORTRESS KEY FOR POINTS MOTOR

POINTS No.	POINTS TYPE	No. OF BACKDRIVES	BEARERS	MECHANICAL DRIVE	EMERGENCY OPERATION				INSCRIPTION
					TYPE	EOL INDEX ESML WARDING	MACHINE INDEX	LOCATION	
985A	WBS D84 MKIII	-	CONCRETE	SPHEROLOCK	EOL KEY	A-G	A-G	934	HURSTVILLE 985A EOL & 985A CPTS. MOTOR
985B	WBS D84 MKIII	-	CONCRETE	SPHEROLOCK	EOL KEY	A-G	A-G	934	HURSTVILLE 985B EOL & 985B CPTS. MOTOR



HURSTVILLE (ILLAWARRA MAIN) - MTMS2 STAGE FINAL
PART SIGNALLING ARRANGEMENT
SHEET 2 OF 4

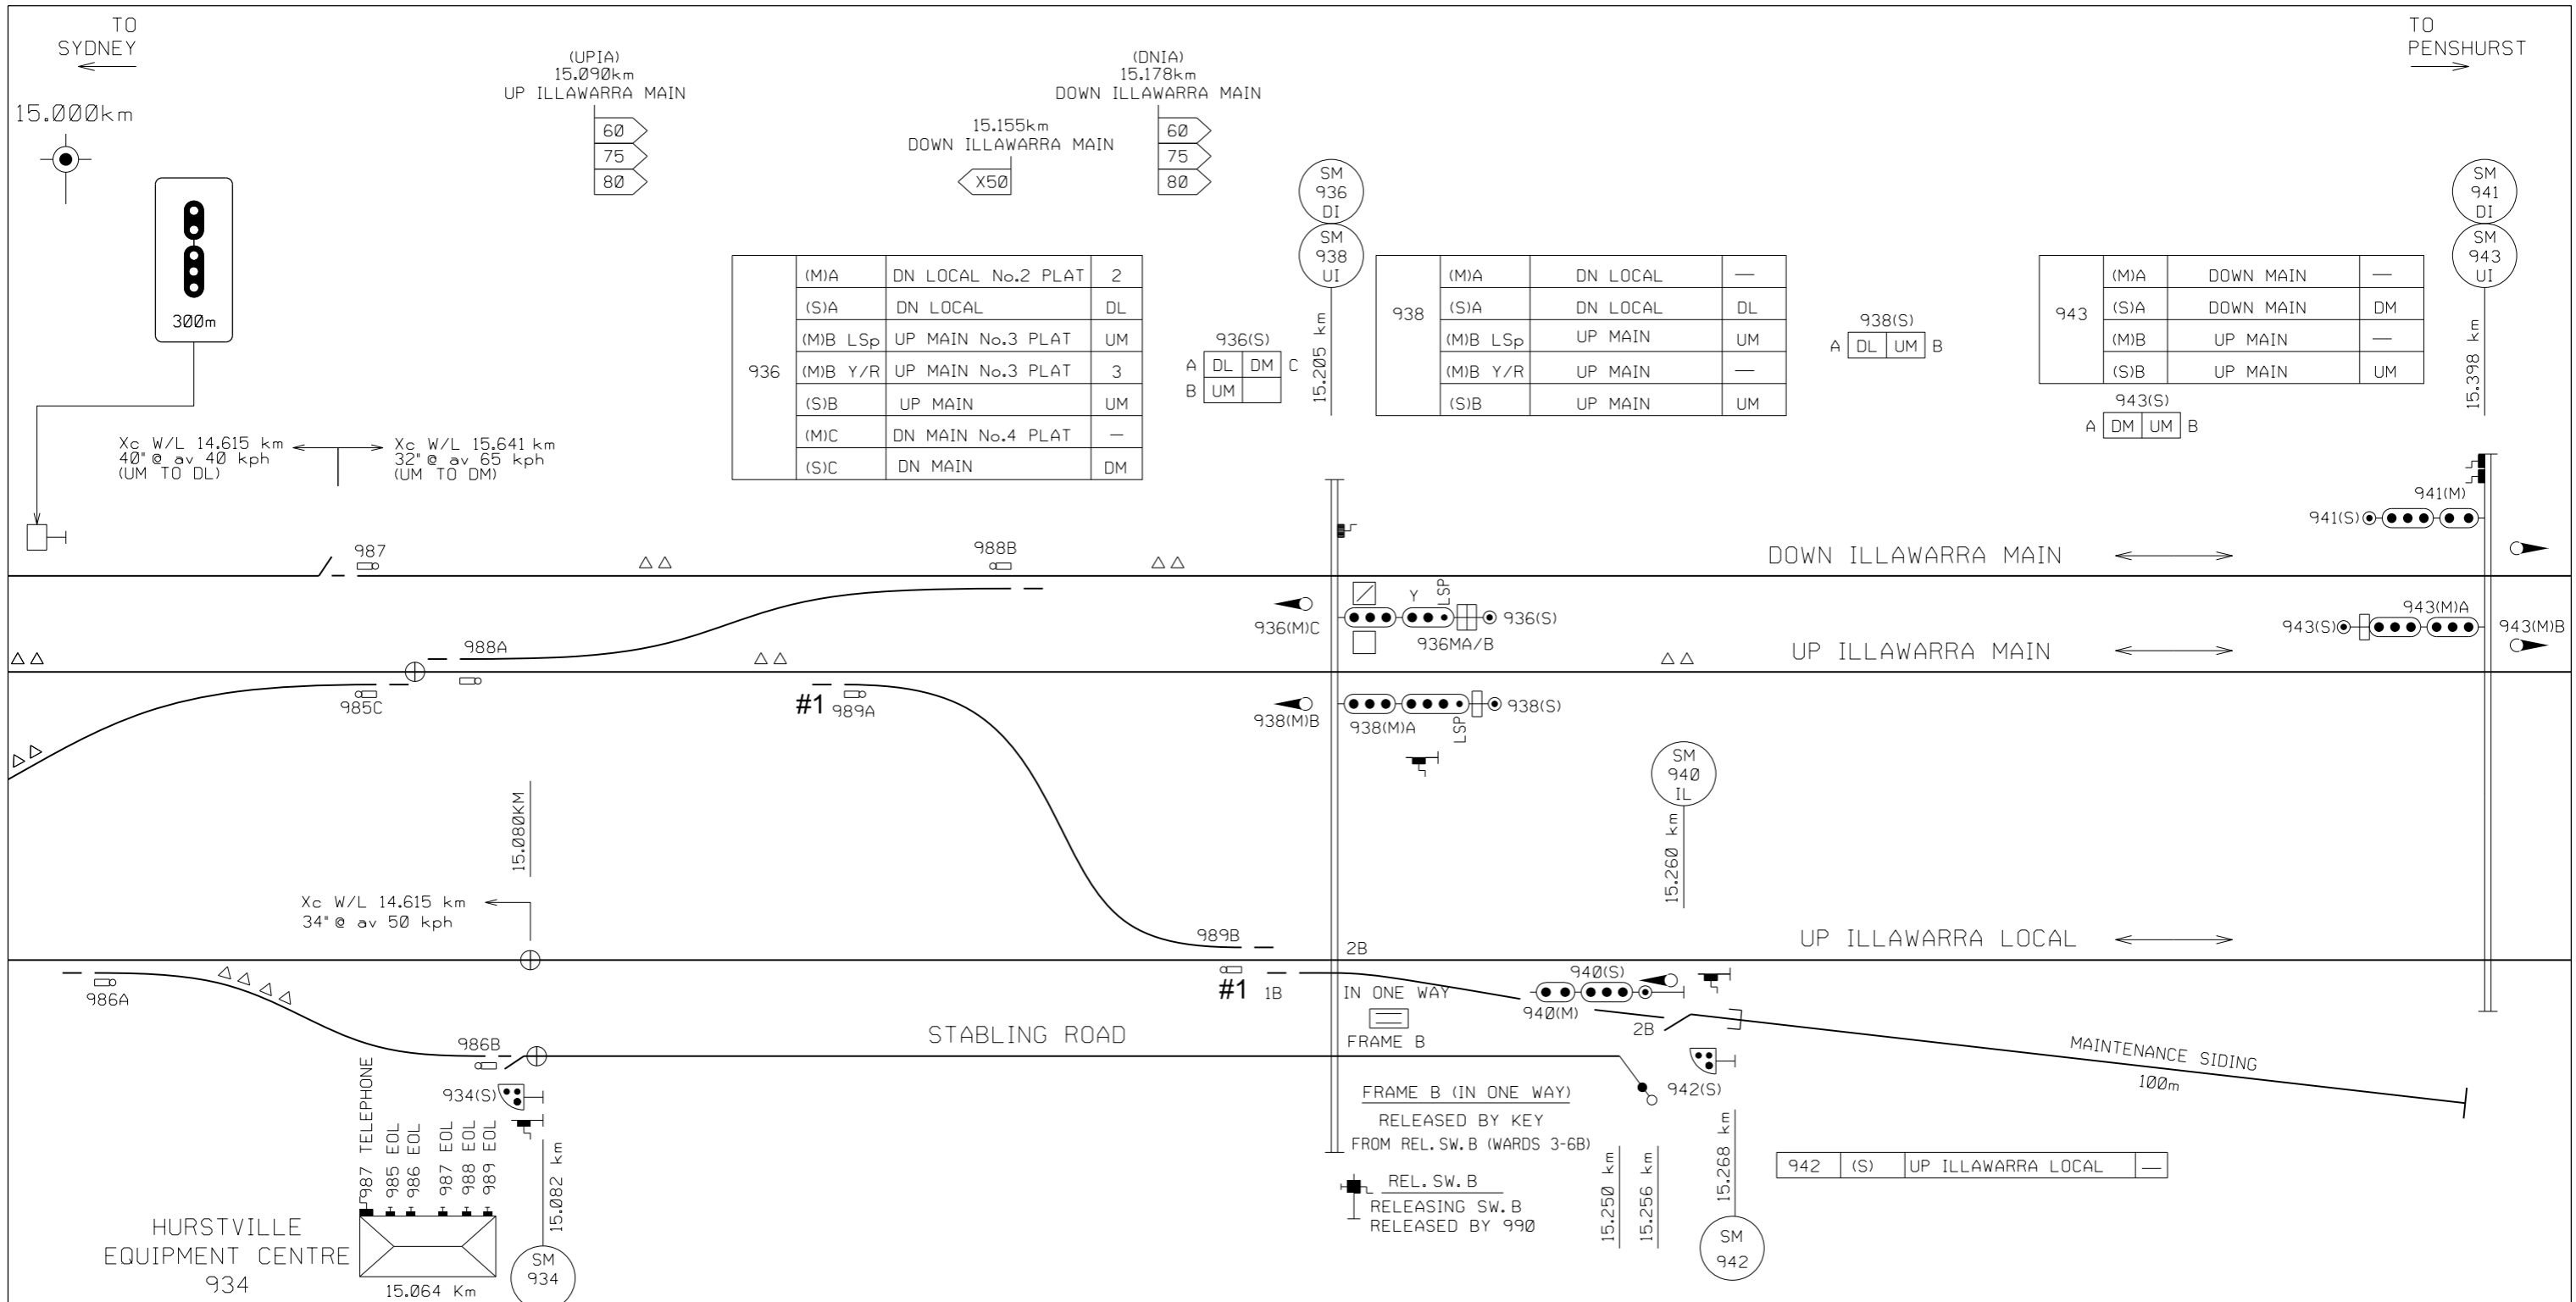

936	(M)A	DN LOCAL No.2 PLAT	2
	(S)A	DN LOCAL	DL
	(M)B LSp	UP MAIN No.3 PLAT	UM
	(M)B Y/R	UP MAIN No.3 PLAT	3
	(S)B	UP MAIN	UM
	(M)C	DN MAIN No.4 PLAT	-
	(S)C	DN MAIN	DM

938	(M)A	DN LOCAL	-
	(S)A	DN LOCAL	DL
	(M)B LSp	UP MAIN	UM
	(M)B Y/R	UP MAIN	-
	(S)B	UP MAIN	UM

943	(M)A	DOWN MAIN	-
	(S)A	DOWN MAIN	DM
	(M)B	UP MAIN	-
	(S)B	UP MAIN	UM

EMERGENCY OPERATION LOCK
MOUNTED IN CUPBOARD SECURED WITH SL LOCK RELEASES FORTRESS KEY FOR POINTS MOTOR

POINTS No.	POINTS TYPE	DUAL 84M LEVER BALL BEARING REMOVED	No. OF BACKDRIVES	BEARERS	MECHANICAL DRIVE	EMERGENCY OPERATION			INSCRIPTION	WIDE CUT NOTCH POSITION	FPL REMOVED	
						TYPE	EOL INDEX ESML WARDING	MACHINE INDEX				
986A	WBS D84 MKIII	NO	0	IN-BEARER	SPHEROLOCK	EOL KEY	A-H	A-H	934	HURSTVILLE 986A EOL & 986A PTS. MOTOR	N/A	N/A
986B	WBS D84 MKIII	NO	0	IN-BEARER	SPHEROLOCK	EOL KEY	A-H	A-H	934	HURSTVILLE 986B EOL & 986B CPTS. MOTOR	N/A	N/A

POINTS No.	POINTS TYPE	No. OF BACKDRIVES	BEARERS	MECHANICAL DRIVE	EMERGENCY OPERATION			INSCRIPTION	
					TYPE	EOL INDEX ESML WARDING	MACHINE INDEX		
985A	WBS D84 MKIII	-	CONCRETE	SPHEROLOCK	EOL KEY	A-G	A-G	934	HURSTVILLE 985A EOL & 985A CPTS. MOTOR
985B	WBS D84 MKIII	-	CONCRETE	SPHEROLOCK	EOL KEY	A-G	A-G	934	HURSTVILLE 985B EOL & 985B CPTS. MOTOR
985C	WBS D84 MKIII	1	CONCRETE	SPHEROLOCK	EOL KEY	A-G	A-G	934	HURSTVILLE 985C EOL & 985C PTS. MOTOR
987	WBS D84 MKIII	-	CONCRETE	SPHEROLOCK	EOL KEY	A-F	A-F	934	HURSTVILLE 987 EOL & 987 CPTS. MOTOR
988A	WBS D84 MKIII	1	CONCRETE	SPHEROLOCK	EOL KEY	A-D	A-D	934	HURSTVILLE 988A EOL & 988A PTS. MOTOR
988B	WBS D84 MKIII	1	CONCRETE	SPHEROLOCK	EOL KEY	A-D	A-D	934	HURSTVILLE 988B EOL & 988B PTS. MOTOR
#1 989A	WBS D84 MKIII	1	CONCRETE	SPHEROLOCK	EOL KEY	A-E	A-E	934	HURSTVILLE 989A EOL & 989A PTS. MOTOR
#1 989B	WBS D84 MKIII	1	CONCRETE	SPHEROLOCK	EOL KEY	A-E	A-E	934	HURSTVILLE 989B EOL & 989B PTS. MOTOR

NOTES:
#1 989A & 989B POINTS CLIPPED, XL LOCKED, SPIKED & DETECTED NORMAL.




HURSTVILLE (ILLAWARRA MAIN) - MTMS2 STAGE FINAL
PART SIGNALLING ARRANGEMENT
SHEET 3 OF 4

TO SYDNEY

TO PENSHURST

15.500km

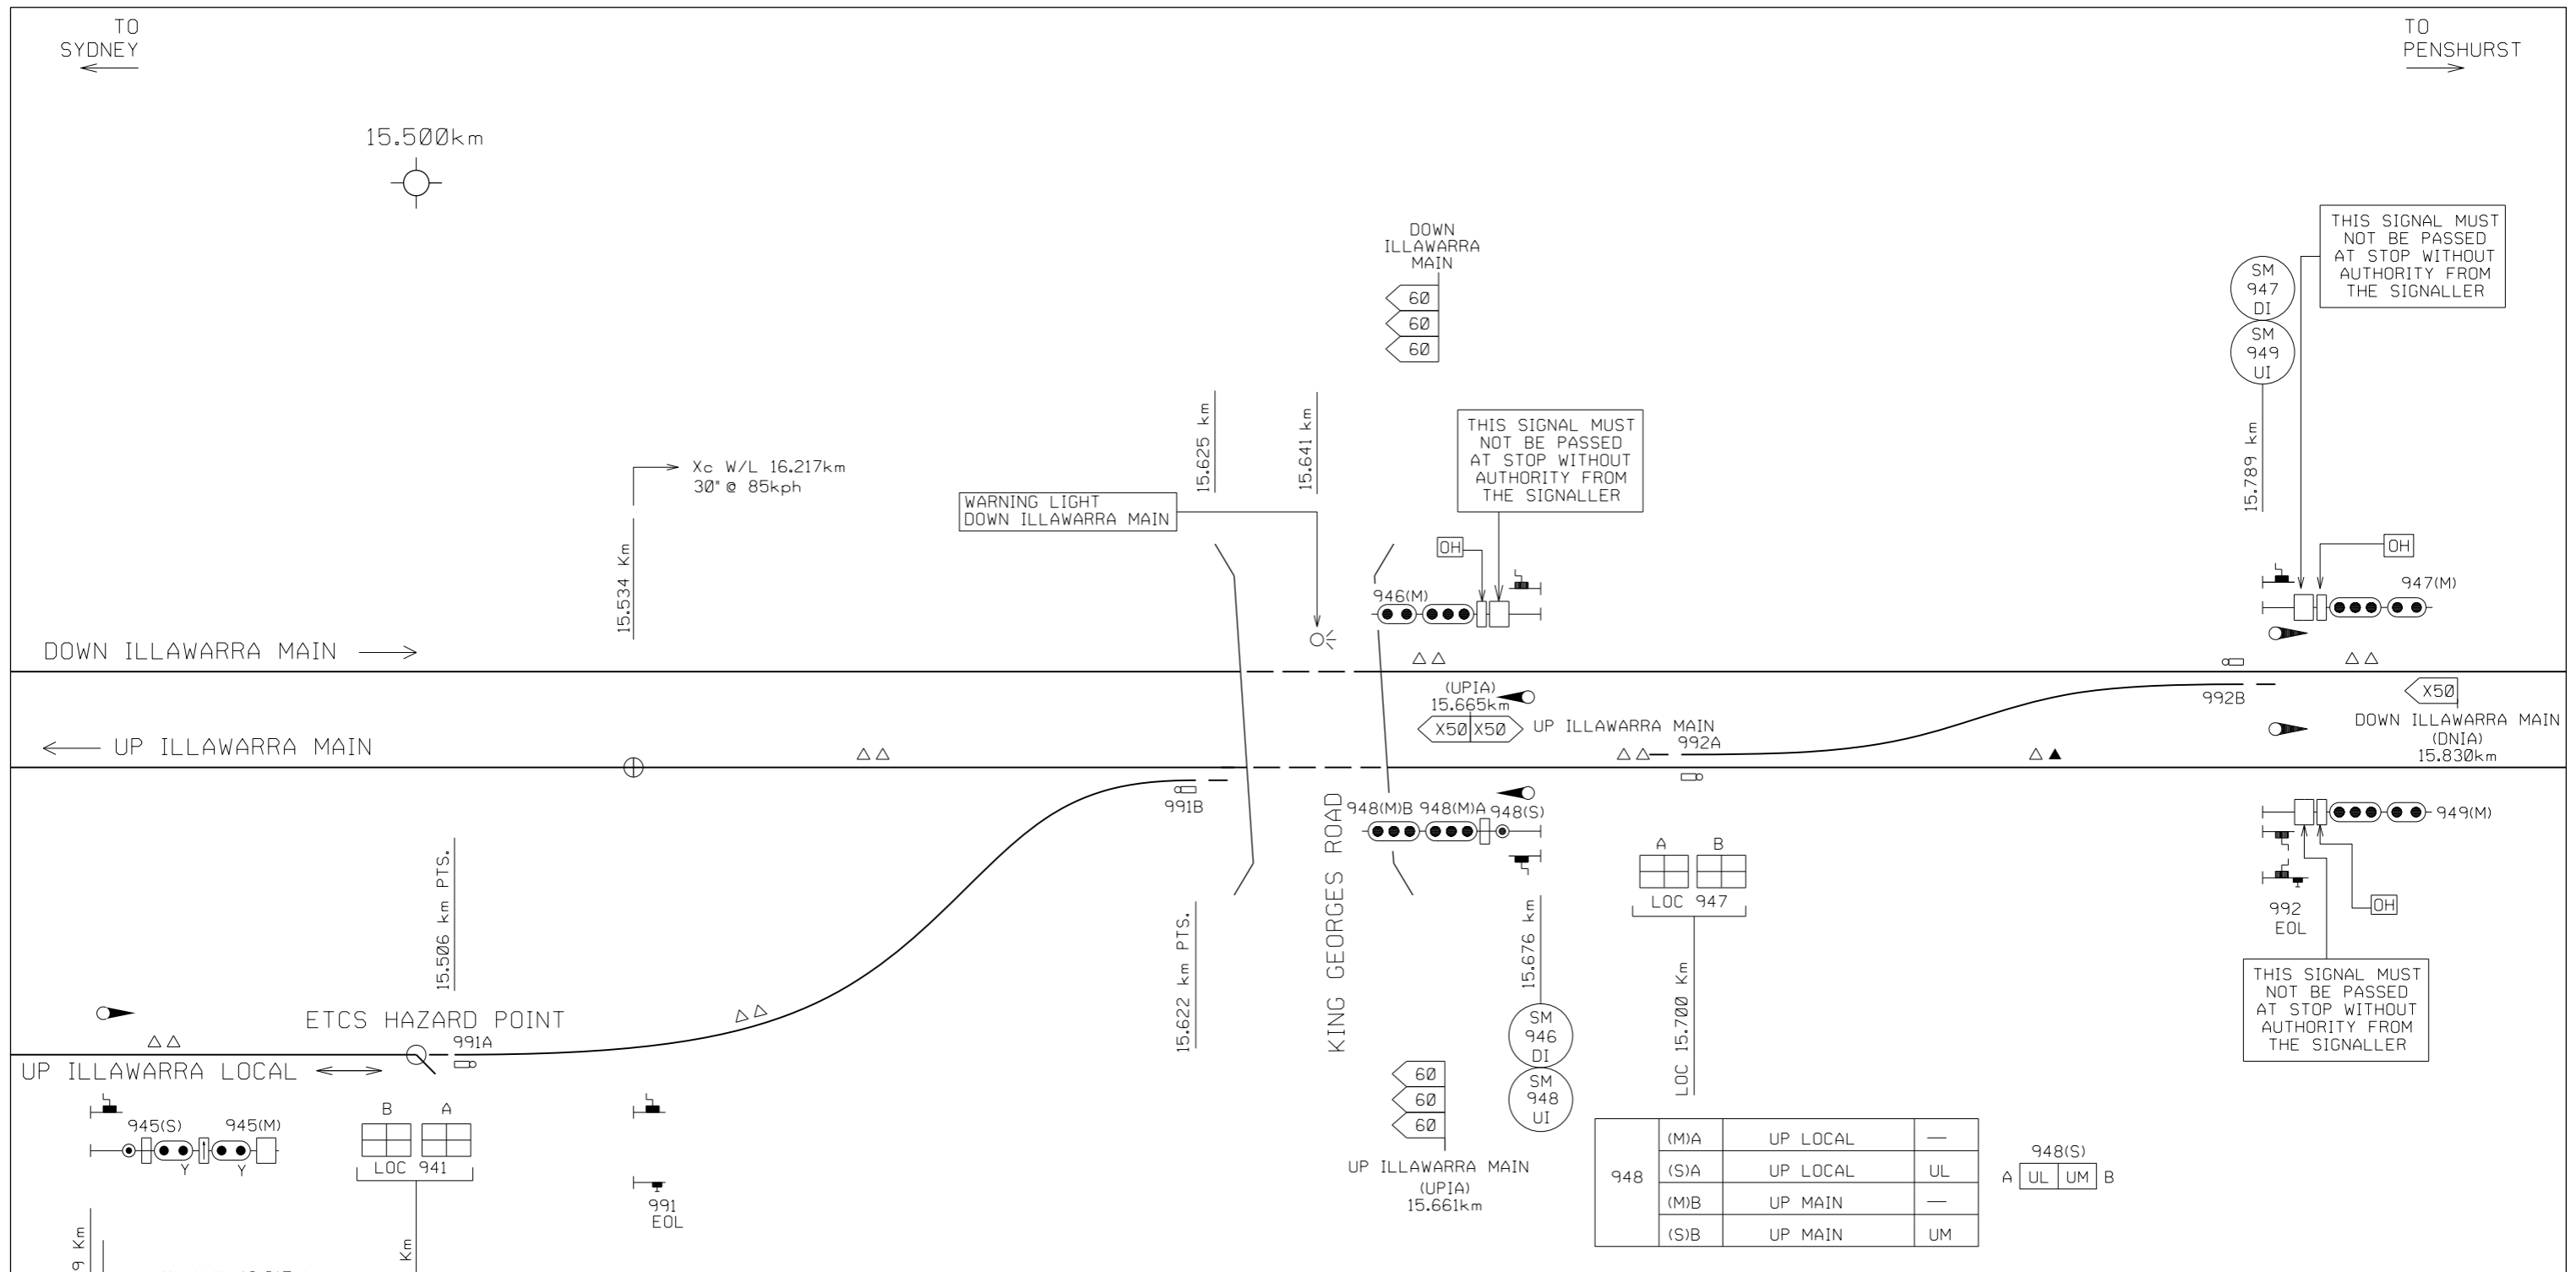

POINT ARRANGEMENT

POINTS No.	POINTS TYPE	DUAL 84M LEVER BALL BEARING REMOVED	No. OF BACKDRIVES	BEARERS	MECHANICAL DRIVE	EMERGENCY OPERATION				INSCRIPTION
						TYPE	EOL INDEX	ESML WARDING	MACHINE INDEX	
991A	WBS D84 MKIII	-	-	IN BEARERS	SPHEROLOCK	EOL KEY	AD	AD	'A' END	HURSTVILLE EOL & 991A CPTS. MOTOR
991A	WBS D84 MKIII	-	1	IN BEARERS	SPHEROLOCK	EOL KEY	AD	AD	'A' END	HURSTVILLE EOL & 991A CPTS. MOTOR
992A	WBS D84 MKIII	NO	1	IN BEARERS	SPHEROLOCK	EOL KEY	AH	AH	947	HURSTVILLE EOL & 992A PTS. MOTOR
992B	WBS D84 MKIII	NO	1	IN BEARERS	SPHEROLOCK	EOL KEY	AH	AH	947	HURSTVILLE EOL & 992B PTS. MOTOR

EMERGENCY SWITCH MACHINE LOCK (ESML)
MOUNTED IN CUPBOARD, SECURED BY S.L.LOCK
RELEASES KEY WITH CRANK HANDLE

POINTS TYPE	POINTS	WARDING	INDEX
WBS M3	991	2-5A	AD
WBS M3	992	1-3A	AH

945	(M)A	DOWN MAIN	D	A	945(S) DM UM B
	(S)A	DOWN MAIN	DM		
	(M)B	UP MAIN	U		
	(S)B	UP MAIN	UM		

948	(M)A	UP LOCAL	-	A	948(S) UL UM B
	(S)A	UP LOCAL	UL		
	(M)B	UP MAIN	-		
	(S)B	UP MAIN	UM		



HURSTVILLE (ILLAWARRA MAIN) - MTMS2 STAGE FINAL
PART SIGNALLING ARRANGEMENT
SHEET 4 OF 4

FROM CENTRAL TO ST. LEONARDS, STANMORE, TURRELLA, AND KOGARAH - COMMISSIONING OF AUTOMATIC TRAIN PROTECTION (ATP) ETCS LEVEL 1 LIMITED SUPERVISION

Commencing at 0900hrs on **Tuesday, 28 June 2022** and continuing until 0400hrs on Wednesday, 29 June 2022, TfNSW will commission into use Automatic Train Protection (ATP) ETCS Level 1 Limited Supervision from Central to St. Leonards, Stanmore, Turrella and Kogarah.

As part of these works the following signage will be brought into use:

Location	Line	Direction	Inscription
ESR Central (Excl) - Erskineville (Excl)			
Erskineville at 2.180km	Down Illawarra Relief	Down	BEGIN ATP
Erskineville at 2.180km	Down Illawarra Relief	Up	END ATP
Erskineville at 2.148km	Up Illawarra Relief	Down	BEGIN ATP
Erskineville at 2.148km	Up Illawarra Relief	Up	END ATP
Erskineville (Excl) - Sydenham (Incl)			
Sydenham at 5.796km	Down Bankstown	Down	END ATP
Sydenham at 5.796km	Down Bankstown	Up	BEGIN ATP
Sydenham at 5.767km	Up Bankstown	Down	END ATP
Sydenham at 5.767km	Up Bankstown	Up	BEGIN ATP

ATP signage will be as per the ESR Central (Excl) - Erskineville (Excl) & Erskineville (Excl) - Sydenham (Incl) Drivers' Diagrams.

DIAGRAM VER14042022

The following signage will be removed:

Location	Line	Direction	Inscription
Macdonaldtown (Excl) – Lewisham (Incl)			
Stanmore at 4.144km	Down Local	Down	BEGIN ATP
Stanmore at 4.144km	Down Local	Up	END ATP
Stanmore at 4.141km	Up Local / Down Suburban	Down	BEGIN ATP
Stanmore at 4.141km	Up Local / Down Suburban	Up	END ATP
Stanmore at 4.135km	Up Suburban / Down Main	Down	BEGIN ATP
Stanmore at 4.135km	Up Suburban / Down Main	Up	END ATP
Stanmore at 4.131km	Up Main	Down	BEGIN ATP
Stanmore at 4.131km	Up Main	Up	END ATP

Location	Line	Direction	Inscription
Bardwell Park (Incl) – Padstow (Excl)			
Bardwell Park at 9.652km	Down Main	Down	BEGIN ATP
Bardwell Park at 9.652km	Down Main	Up	END ATP
Bardwell Park at 9.652km	Down Local	Down	BEGIN ATP
Bardwell Park at 9.652km	Down Local	Up	END ATP
Bardwell Park at 9.649km	Up Main	Down	BEGIN ATP
Bardwell Park at 9.649km	Up Main	Up	END ATP
Bardwell Park at 9.649km	Up Local	Down	BEGIN ATP
Bardwell Park at 9.649km	Up Local	Up	END ATP

Arncliffe (Excl) – Carlton			
OHWS SW 12+141 in the Down cess at 12.135km	Down Illawarra Main	Down	BEGIN ATP
OHWS SW 12+141 in the Down cess at 12.135km	Down Illawarra Main	Up	END ATP
OHWS SW 12+141 in the Up cess at 12.132km	Up Illawarra Local	Down	BEGIN ATP
OHWS SW 12+141 in the Up cess at 12.132km	Up Illawarra Local	Up	END ATP
On a post in the six foot between the Up Illawarra Main and Down Illawarra Local at 12.135km	Up Illawarra Main / Down Illawarra Local	Down	BEGIN ATP
On a post in the six foot between the Up Illawarra Main and own Illawarra Local at 12.135km	Up Illawarra Main / Down Illawarra Local	Up	END ATP
Waverton (Excl) – Artarmon (Incl)			
St Leonards at 8.851km	Down Shore	Down	BEGIN ATP
St Leonards at 8.851km	Down Shore	Up	END ATP
St Leonards at 8.896km	Up Shore	Down	BEGIN ATP
St Leonards at 8.896km	Up Shore	Up	END ATP

VER14042022
Mark Naylor

System Integration Project Manager Transport for NSW

Mob: 0431 883 513

Email: mark.naylor@transport.nsw.gov.au

Brian Spaul

Signal Commissioning Engineer UGL

Mob: 0401 710 457

Email: emanuel.lavidis@ugllimited.com

Jesse Crick

ETCS Commissioning Manager Transport for NSW

Mob: 0408 292 819

Email: jesse.crick@transport.nsw.gov.au

Immanuel Jegan














Signalling Design Engineer Rail Systems Australia

Mob: 0432 972 207

Email: immanuel.jegan@railssystemsaustralia.com.au

FROM REDFERN

TO ERSKINEVILLE








DOWN ILLAWARRA RELIEF →

← UP ILLAWARRA RELIEF



FROM SYDENHAM

TO CANTERBURY

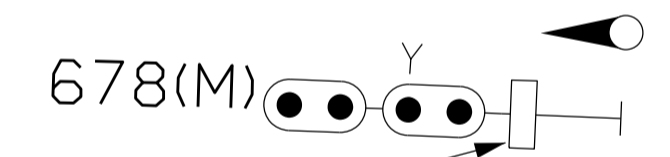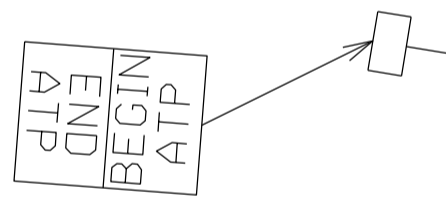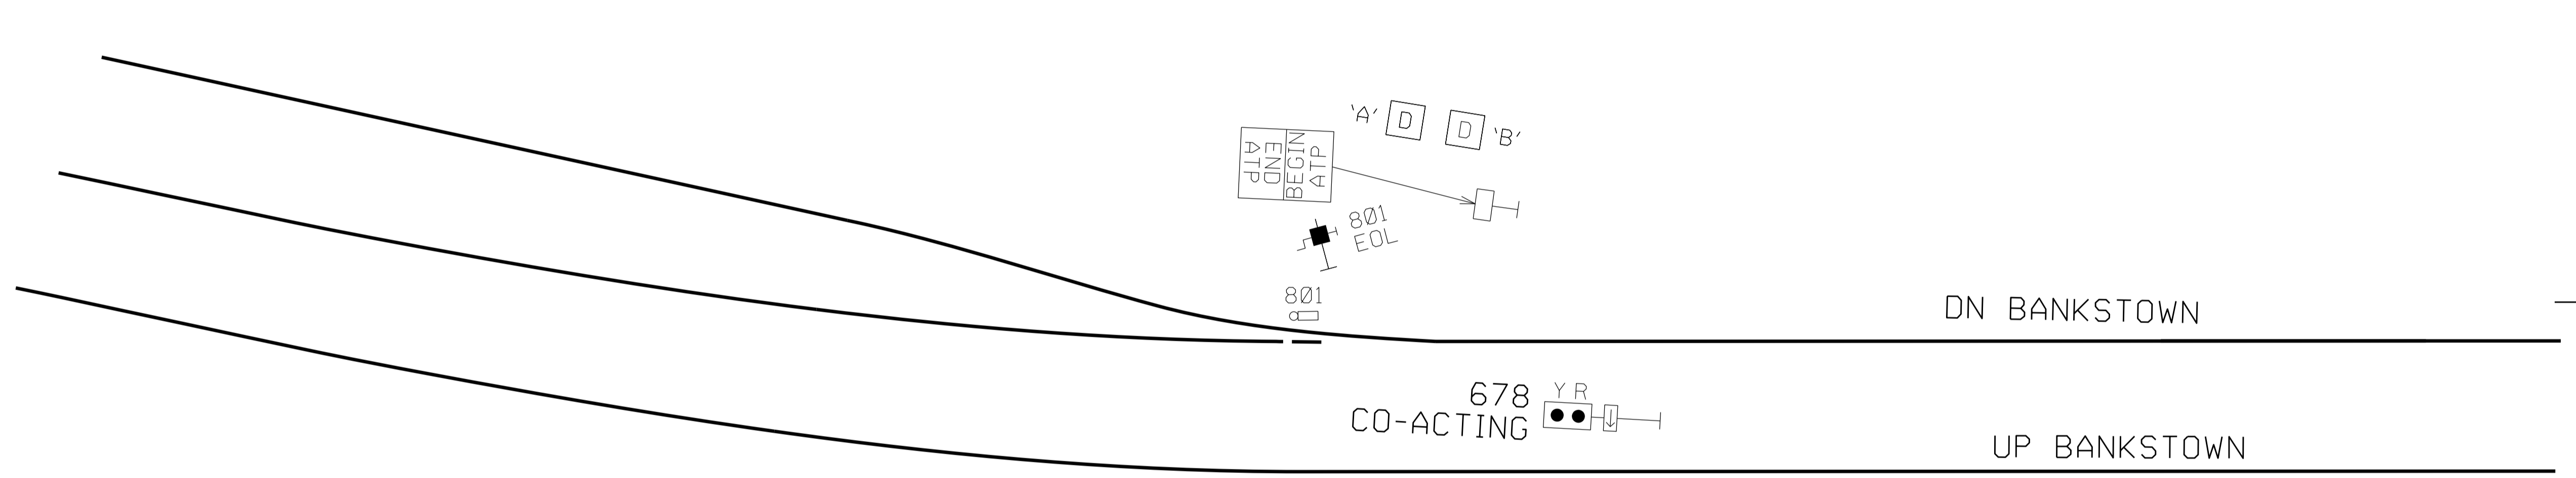

SM 678 CO-ACTING

**CLARENDON – TRANSPORT ACCESS PROGRAMME -
EMERGENCY OPERATION AND BLOCKING KEYS
RELOCATION WORKS**

Since 0820 hours on **Saturday, 28 May 2022**, the following works was carried out:

- Removal of 2 sets of Emergency Operation and Blocking Keys and Test Keys at Old Signals (EMD) room Clarendon station were removed and kept at Richmond station office key safe with other keys at Richmond station.

This work was required to enable future 24/7 access to the emergency operation and blockings keys.

VER30072021**Amit Barot**

Project Manager Interface – Asset Management Engineering and Maintenance

Sydney Trains

Mob: 0497 951 091

Email: amit.barot@transport.nsw.gov.au

Habib Daher

A/Project Manager, TfNSW I&P

Mob: 0468 571 970

Email: habib.daher@transport.nsw.gov.au

**BANKSTOWN TO YAGOONA - MARIYUNG (NIF) AC
FEEDERS STAGE 2 – 713 FEEDER**

Commencing at 0600 hours on **Monday, 13 June 2022**, and continuing until 1800 hours on Friday, 1 July 2022, the following work will be carried out on 713 Feeder poles:

- Non-Destructive Digging (NDD)
- Pole Hole Boring for Poles J2R, J2RSs, 3R, 4R, 5R, 6R, 7R, 7AR, 8R, 8AR, 9AR, J10R, J10RSs, 11R,

VER15122021**Philip Tan**

Project Engineer, Abergeldie Complex Infrastructure

Mob: 0408365587

Email: ptan@abergeldie.com

MTMS2 – HURSTVILLE – SPEED SIGN CHANGES

On **Sunday, 3 July 2022** (WE1), the following speed sign changes will take place in the vicinity of Hurstville Station as part of the MTMS2 project:

**Section 8a Central -
Hurstville Illawarra Line**

	KILO-MET-RAGE	DOWN			UP		
		General	Medium	High	General	Medium	High
	13.692	Allawah					
Existing	14.265	X50	980A Pts		
Existing	14.356	60	60	60
Existing	14.370	60	80	85
Insert	14.600	984B Pts			X45
Existing	14.680	60	60	60	⤵	⤵	⤵
	14.837	Hurstville					
		⤵ Down Sign on Up Main					
		⤴ Up Sign on Down Main					

**Section 8d Hurstville - Sutherland
Bi-directional - Illawarra Line**

	KILO-MET-RAGE	DOWN MAIN			UP MAIN		
		UP direction			Down Direction		
		General	Medium	High	General	Medium	High
Existing	15.060	988A Pts			X50
Existing	15.090	60	75	80
Remove	15.090	989A Pts			X35
Existing	15.155	X50	988B Pts		
Existing	15.660	60	60	60

Existing	15.665	992A Pts	X50
Existing	15.830	X50	992B Pts
Existing	16.125	Penshurst			

Cameron Ly

Principal Track Design Engineer, Engineering System Integrity
Email: Cameron.Ly@transport.nsw.gov.au

Jamie Ha

Designer, Track Design, Engineering System Integrity
Email: Jamie.ha@transport.nsw.gov.au

**CARINGBAH – KINGSWAY OVERBRIDGE BRIDGE
REFURBISHMENT (CARINGBAH STATION)**

Since **Monday, 6 June 2022** and continuing until 0200 hours on Monday 26 June 2023, the following work will be carried out;

- Installation of scaffold and plywood containment on the Up and Dn Cronulla lines at Caringbah Station. These works are part of a bridge refurbishment project and will be ongoing and staged throughout for a year.

Mark Tomasetti

Senior Site Manager, Sydney Trains Major Works

Mob: 0417 576 871

Email: mark.tomasetti@transport.nsw.gov.au

Phillip Nguyen

Project Manager, Sydney Trains Major Works

Mob: 0431 691 258

Email: phillip.nguyen2@transport.nsw.gov.au

**MARRICKVILLE (B7+152) – LIVINGSTONE RD BRIDGE
TEMPORARY PORTAL STRUCTURE INSTALLATION**

Commencing at **0600 hours on Saturday, 2 July 2022** and continuing until 1800 hours on Friday 15 July 2022, the following works will be carried out:

- A new temporary portal structure with decking and hoarding will be installed to enable bridge repair works to be performed outside of possession.

VER03062022**Michael Swadling**

Project Manager

Network Growth Portfolio

Strategy, Portfolio and Investment

Mob: 0421 611 239

Email: michael.swadling@transport.nsw.gov.au

WOLLI CREEK – TOC UPDATE

On **Monday, 4 July 2022**, the TOC will be updated as follows to reflect location of speed signs on site.

Section 8b

Central - Hurstville

Illawarra Local Line

	KILO-MET-RAGE	DOWN			UP		
		General	Medium	High	General	Medium	High
	6.842	Tempe					
Existing	7.172	65	85	85
Existing	7.218	60	75	80
Amend	7.270	X35	<i>753 Pts</i>		
To Read	7.270	X35	..	X40	<i>753 Pts</i>		
	7.279	Wolli Creek Jct					

Cameron Ly

Principal Track Design Engineer, Engineering System Integrity
 Email: Cameron.Ly@transport.nsw.gov.au

Jamie Ha

Designer, Track Design, Engineering System Integrity
 Email: Jamie.ha@transport.nsw.gov.au

REDFERN – TOC UPDATE

On **Monday 4 July 2022**, the TOC will be updated as follows to reflect location of speed signs on site.

Section 2a

Central - Homebush

Main Lines

	KILO-MET-RAGE	DOWN Nor-mal	XPT	UP Nor-mal	XPT
	1.299	Redfern			
Amend	1.330	X15
		<i>Up Main 647 crossover</i>			
To Read	1.330	X15	..	647A Pts	
		<i>Down Sign on Up Main</i>			
Insert	1.375	X30	..	649 Pts	
Existing	1.405	50	..
Existing	2.235	667 Pts		X25	..
	2.476	Macdonaldtown			

Section 2h

Illawarra Dive

Down Up

	KILO-MET-RAGE	DOWN Nor-mal	XPT	UP Nor-mal	XPT
	1.299	Redfern			
Remove	1.540	X30
Insert	1.490	30

Amend	2.260	X25
To Read	2.216	X25	..	<i>674B Pts</i>	
Existing	2.300	30	..

Cameron Ly

Principal Track Design Engineer, Engineering System Integrity

Email: Cameron.Ly@transport.nsw.gov.au

Jamie Ha

Designer, Track Design, Engineering System Integrity

Email: Jamie.ha@transport.nsw.gov.au

STATUS OF TOM NOTICES

<i>Number</i>	<i>Title</i>	<i>Issued</i>	<i>Effective</i>
001 – 2007	Introduction of TOM Notices	13/09/07	13/09/07
018 – 2007	Emergency equipment boxes Rail	01/11/07	19/11/07
010 – 2012	48 Class: Train Operations Manual (TOM)	25/10/12	04/11/12
003 – 2013	48 Class: Wheels	07/02/13	10/02/13
015 – 2013	OMET 200: Minimum Standards for Electric Trains	30/05/13	09/06/13
002 – 2014	OMET 220: Wheelslip light indications	20/02/14	02/03/14
004 – 2016	OMET 262: Failure of Train Management System	14/07/16	24/07/16
001 – 2017	Incorporation of Waratah, Oscar and Millennium TOM Notices and SAFE Notices into the TOM	19/01/17	29/01/17
005 – 2017	TWP 150: Damaged or Missing Window Glass	06/04/17	16/04/17
008 – 2017	TWP 176: Wayside Train Condition Monitoring	06/07/17	16/07/17
004 – 2017	TWP 174 Ice Radio	20/07/17	31/07/17
016 – 2017	WAR 030 Minimum Standards	23/11/17	03/12/17
018 - 2017	Amendment to OMET 200	14/12/17	24/12/17
011 – 2018	Trial of C-Set trains fitted with ATP	19/07/18	29/07/18
012 – 2018	Control Circuit Failure	23/08/18	02/09/18
005 – 2018	OMET 242 Reverser handle jams in forward or reverse	18/08/18	28/08/18
006 – 2018	OMET 250 Applying power from the rear	18/08/18	28/08/18
008 – 2018	TWP 154 Responding to incapacitated Driver/Guard	18/08/18	28/08/18
013 – 2018	Trial of K sets fitted with ATP	17/08/18	27/08/18
016 - 2018	Network Rules Operational standards update	17/08/18	27/08/18
005 – 2019	TWP 106: On Road Performance Assessment	31/01/19	10/02/19
001 – 2019	OMET 266: Operation of Y-set trains	21/02/19	03/03/19
003 - 2019	OMET 264: Minimum Tractive Effort Requirements	21/02/19	03/03/19
012 – 2019	TWP 192: Working Trains Out of service	21/02/19	03/03/19
007 – 2019	TWP 136 Defective wheels	06/03/19	24/03/19
008 – 2019	TWP 190 Automatic Train Protection	06/03/19	24/03/19
009 – 2019	Train crew relieved in service & relay driver	06/03/19	24/03/19
010 – 2019	TWP 152 Disabled trains	06/03/19	24/03/19
011 – 2019	TWP 156: Operating doors	14/03/19	24/03/19
014 – 2019	OSCAR Internal Emergency Door Releases	14/03/19	24/03/19
004 – 2019	TWP 118 Reporting Faults	11/04/19	28/04/19
022 - 2019	Exception to WAR 030 – Minimum Standards	03/10/19	13/10/19
008 - 2020	MOS for TTU Upgraded Tangara trains during testing	20/02/20	01/03/20
004 - 2020	TWP 124 Defective Brakes	20/05/20	08/06/20
005 - 2020	TWP 126 Defective Automatic Brakes	20/05/20	08/06/20
012 - 2020	WAR 202 Bogie Faults	20/05/20	08/06/20
011 - 2020	TWP 162 Train Crew Bell Signals	02/06/20	15/06/20
001 - 2020	Trial of Millennium trains fitted with ATP	12/06/20	21/06/20
014 - 2020	TWP 112 Changing ends	20/07/20	03/08/20

<i>Number</i>	<i>Title</i>	<i>Issued</i>	<i>Effective</i>
017 - 2020	Operating Tangara, OSCAR, Millenium and Waratah with deflated air springs in the city underground	07/12/20	14/12/20
005 - 2021	OMET 254 Topside preparation locations	05/03/21	15/03/21
006 - 2021	TWP 100 Responsibilities of Train Crews	23/03/21	05/04/21
007 - 2021	Operation of H sets fitted with ATP	10/05/21	24/05/21
008 - 2021	Transition (Emergency couplers on OSCAR trains)	14/07/21	26/07/21
011 - 2021	Exception to OMET 200 & 350	17/11/21	29/11/21
001 - 2022	Use of Automatic train Protection in Millennium trains	23/03/22	03/04/22
002 - 2022	Waratah A & B sets fitted with ATP	23/03/22	03/04/22
005 - 2022	TWP 160 Driver procedure at stations	21/04/22	08/05/22

01
STATUS OF PERMANENT SAFE NOTICES

<i>Number</i>	<i>Title</i>	<i>Issued</i>	<i>Effective</i>
003 - 2021	Use of Signal Key Switches	02/12/21	12/12/21
002 - 2021	Introduction of the NIMP	14/10/21	24/10/21

Steve Swanson

Network Rules Specialist

Tel: 0428416505

Email: stephen.swanson@transport.nsw.gov.au

STATUS OF NETWORK MANUALS AND FORMS**Network Manuals**

Network Local Appendices	RailSafe Website	Online documents
Operator Specific Procedures	RailSafe Website	Online documents
Network Rules	RailSafe Website	Online documents
Network Procedures	RailSafe Website	Online documents
Forms	RailSafe Website	Online documents (or order as applicable)




<i>Title</i>	<i>Status Sheet</i>	<i>Date issued</i>
--------------	---------------------	--------------------

Train Working Procedures

TWP 100	TN 006 - 2021	April 2021
TWP 102	3	May 2012
TWP 108	4	May 2012
TWP 110	TN 009 - 2019	March 2019
TWP 112	TN 014 - 2020	August 2020
TWP 114	4	November 2015
TWP 116	3	May 2012
TWP 118	TN 004 - 2019	April 2019
TWP 120	3	May 2012
TWP 122	3	May 2012
TWP 124	TN 004 - 2020	May 2019
TWP 126	TN 005 - 2020	May 2019
TWP 128	3	May 2012
TWP 130	3	May 2012
TWP 132	3	May 2012
TWP 134	3	May 2012
TWP 136	TN 007 - 2019	March 2019
TWP 138	4	November 2015
TWP 142	3	May 2012
TWP 144	5	May 2012
TWP 146	3	May 2012
TWP 148	3	May 2012
TWP 150	TN 005 - 2017	April 2017
TWP 152	TN 010 - 2019	March 2019
TWP 154	TN 008 - 2018	July 2018
TWP 156	TN 011 - 2019	March 2019
TWP 158	3	May 2012
TWP 160	TN 005 - 2022	May 2022
TWP 162	TN 011- 2020	May 2019
TWP 164	4	May 2012
TWP 166	3	May 2012
TWP 168	3	May 2012
TWP 170	3	May 2012
TWP 172	4	May 2012
TWP 174	TN 004 - 2017	July 2017
TWP 176	TN 008 - 2017	July 2017
TWP 182	1	November 2015
TWP 184	1	November 2015
TWP 188	1	November 2015
TWP 190	TN 008 - 2019	March 2019
TWP 192	TN 012 - 2019	March 2019

DISTRIBUTION OFFICERS**Sydney Trains****Safety and Environment****Maria Economou**


Safety Support

 2 4502 2 1840 Maria.Economou@transport.nsw.gov.au**Train Crew Operations****Manager Day of Operations** 8577 7029


TCOManagerDayofOperations@transport.nsw.gov.au

Train Crewing**Tim Kelly**


Operating Standards Officer

 0422088764 timothy.kelly@transport.nsw.gov.au**Amba Francisco**

Crew Manager – Blacktown/Richmond

 42828 amba.francisco@transport.nsw.gov.au**Anthony Robb**


Crew Area Manager - Flemington

 9536 8844 Anthony.robb@transport.nsw.gov.au**Craig Jackson**

Crew Area Manager - Mortdale

 42624 craig.jackson@transport.nsw.gov.au**Prassanth Indrakumar**



Manager Business Intergration

 69378 prassanth.indrakumar@transport.nsw.gov.au


gov.au

Patrick Rhymer



Acting Crew Area Manager - Campbelltown

 91755 patrick.rhymer@transport.nsw.gov.au**Rita Kazzi**


Acting Crew Area Manager Leppington

 63549 rita.kazzi@transport.nsw.gov.au**Rhys Blakey**


Senior Manager Business Enablement

 9224 2044 rhys.blakey@transport.nsw.gov.au**Eric Gardner**


Acting Crew Manager - Penrith

 42893 eric.gardner@transport.nsw.gov.au**Hana Farhat**


Readiness Project Coordinator

 39435 Hana.Farhat2@transport.nsw.gov.au**Andree Porter**


Operations - ROC

 20113 Andree.Porter@transport.nsw.gov.au**Toby Reynolds**

Shift Manager Central


 35982 toby.reynolds@transport.nsw.gov.au**Kerrie-Ann Clarke**

Administration Support Campbelltown


 61725 kerrie-ann.clarke@transport.nsw.gov.au

Matthew Quinn


Head of Crew Service Experience Sector 2

 69378 Matthew.Quinn@transport.nsw.gov.au**Mario Chalouhi**


Senior Manager Continuation Training & Competence

 42616 Mario.Chalouhi@transport.nsw.gov.au**Gurdip Singh**


Standards Competency Officer

 0476843447 Gurdip.Singh@transport.nsw.gov.au**Service Delivery Response****Megan Parker**


Service Delivery Response

 0491226502 megan.parker@transport.nsw.gov.au**Leigh Lawton**

Service Delivery Response

 0418237261 leigh.lawton@transport.nsw.gov.au**Maintenance****Fleet Maintenance****Hoshedar Movdawalla**


Fleet Maintenance Sydney Trains

 2 0532  2 1274 HOSHEDAR.MOVDAWALLA@transport.nsw.gov.au**Ram Ramaswamy**


Fleet Maintenance Sydney Trains

 2 0523  2 1274 RAMYAVARAN.RAMASWAMY@transport.nsw.gov.au**Network Maintenance****Zaneta Janevski**

Engineering & Maintenance


 87570199 zaneta.janevski@transport.nsw.gov.au**Shannon Newton**

Track Access Coordinator – North

 95363791 Shannon.Newton@transport.nsw.gov.au**Xerxes Francia**


Track Access Coordinator – North

Hornsby Network Base

 3 6740 Xerxes.Francia@transport.nsw.gov.au**Jonathan Barnes**



Track Access Coordinator – West

Blacktown Network Base

 87512 Jonathan.Barnes@transport.nsw.gov.au**Ennio Soster**

SCE


Project Delivery Electrical

 25236  25917 ENNIO.SOSTER@transport.nsw.gov.au**Daljit Kaur**

Infrastructure Maintenance — Facilities


 2 5922  2 5950 Daljit.Kaur@transport.nsw.gov.au**Adrian Aquilina**

Team leader - Strathfield Mains

 97526610 adrian.aquilina@transport.nsw.gov.au**Christina Morgan**


Administration Support

ICON

 9379 6051 Christina.Morgan@transport.nsw.gov.au


Lorinda Melvin

Administration Support


 0439510480 lorinda.melvin@transport.nsw.gov.au**Edward Lusik**

Team Leader Signals


CBD

 95368135 edward.lusik@transport.nsw.gov.au**Major Works****Greg Page**



Infrastructure Track

 25375 gregory.page@transport.nsw.gov.au**Michael Warner**


Signals and Electricity

 9848 9333 michael.warner@transport.nsw.gov.au**Logistics & Supply Chain****Murari Singh**


Contract Assurance Administrator

 02 9848 9698 Murari.Singh@transport.nsw.gov.au**Engineering & System Integrity****Teresa Sitjar**


Signalling & Control Systems

 42458 Teresa.Sitjar@transport.nsw.gov.au**Yass Zahab**


Geotechnical Services

 2 7589  2 7786 Yassine.El-Zahab@transport.nsw.gov.au**Richard Agostino**


C and CS

 2 0875  9 2137 Richard.Agostino@transport.nsw.gov.au**Human Resources****Robert Neloski**



Training — Learning and Development

 2 7567 robert.neloski@transport.nsw.gov.au**Peter Nilon**


Survey Group

 9848 9904 peter.nilon@transport.nsw.gov.au**Trainlink****Phillip Antonioli**



Operational Improvement Manager

 8574 2960 0417694249 Phillip.antonioli@transport.nsw.gov.au**Ashley Brandse**



Associate Director Operations North & Central

 4962 9820 ASHLEY.BRANDSE@transport.nsw.gov.au**Robert Blanch**



Area Manager Hunter & Regional North

 43499210 0458261501 ROBERT.BLANCH@transport.nsw.gov.au**Netti Byrnes**

Area Manager Central Coast


 43499210 0458261501 Annette.Byrnes@transport.nsw.gov.au**Leisa Case**

Area Manager Central Intercity

  0429900371 Annette.Byrnes@transport.nsw.gov.au

Dwayne Purcell



Area Manager Central Regional

 0428670580


DWAYNE.PURCELL@transport.nsw.gov.au

Michael Dorrian

Area Manager South Coast

  0439743316 Michael.dorrian@transport.nsw.gov.au**Ian Modon**

Area Manager South Main

 0427016255

NOTES

NOTES

NOTICE TO SUBSCRIBERS

The Weekly Notice is issued every Tuesday, and takes effect on the following Monday.

Those who require the Weekly Notice must ensure that they receive it and are aware of the changes that affect their work duties and responsibilities.

Director Network Standards, Systems & Quality**Sydney Trains**

Burwood NSW 2134

Tuesday, 07 June 2022