

Signals and Signs

NSG 602 Shunting signals

Description

This document describes the types of shunting signals.

Not what you are looking for? See more [NSG Rules](#)

Purpose

To describe the types of shunting signals used in the Network.

Principle

Shunting signals are:

- controlled signals, operated by Signallers or other Qualified Workers, and
- used to authorise shunting movements.

Shunting signals must be passed only in accordance with [NSG 606 Responding to signals and signs](#).

The Figures in this Rule show examples of the shunting signals used in the Network.

Route signalling

Colour light shunting signals

If a colour light shunting signal controls movements over more than one route, a route indicator is usually provided.

Route indicators are described in [NSG 604 Indicators and signs](#).

Semaphore shunting signals

The front of a semaphore shunting signal arm is red, usually with a longitudinal (along its length) white stripe. The back of the arm is white, with a longitudinal black stripe.


Multiple semaphore shunting signals are usually mounted one above the other on the same post.

The highest signal on a signal post is for the leftmost route. The next signal down is for the route immediately to the right of the first route, and so on.

Signals and Signs

NSG 602 Shunting signals

FIGURE 1: Multiple semaphore signals set for a movement from the Down Line to the Up Line

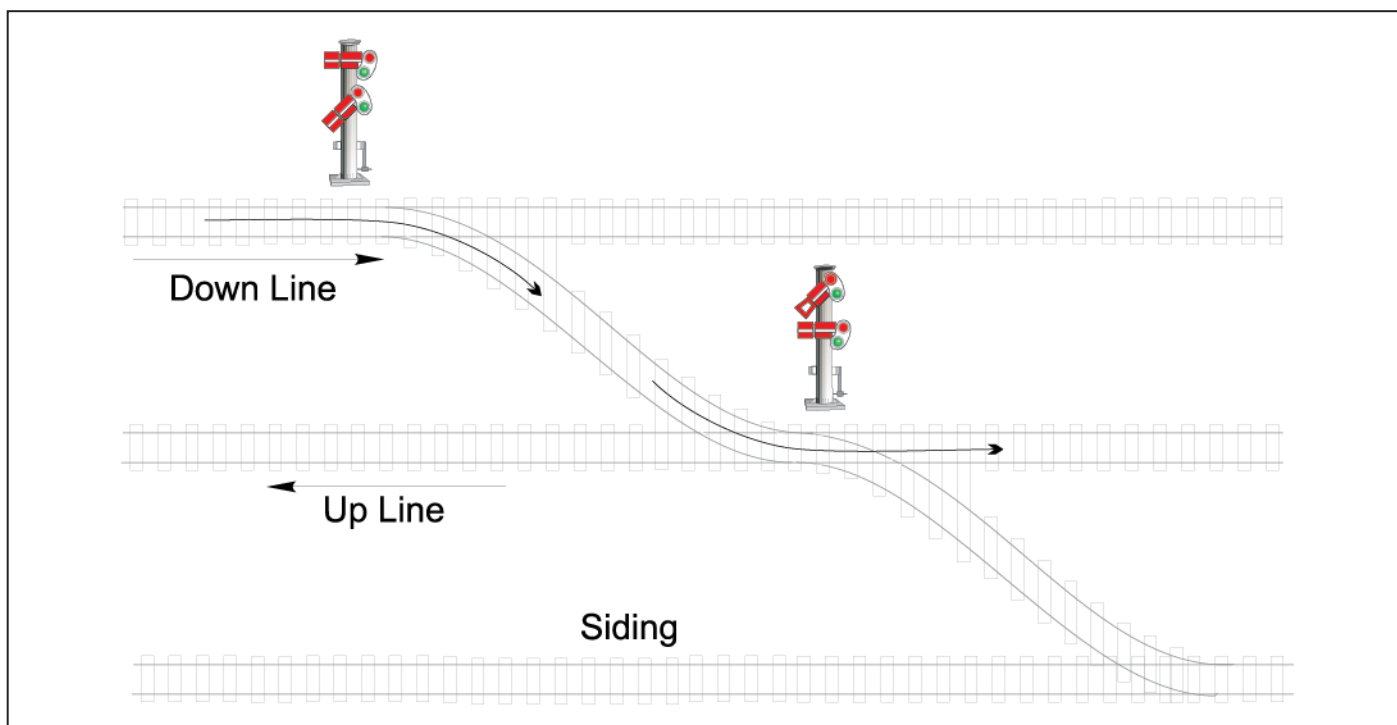

Subsidiary signals

If placed below running signals, small colour light or small semaphore signals are subsidiary signals.

If the subsidiary shunting signal displays **PROCEED**, the running signal displays **STOP**.

General purpose shunting signals

General purpose shunting signals are placed:




- beside running lines
- within shunting yards.

Shunting signals may be subsidiary signals and, when attached to home signals, may be referred to as calling on signals.

Signals and Signs

NSG 602 Shunting signals

FIGURE 2: Examples of colour light shunting signals displaying PROCEED

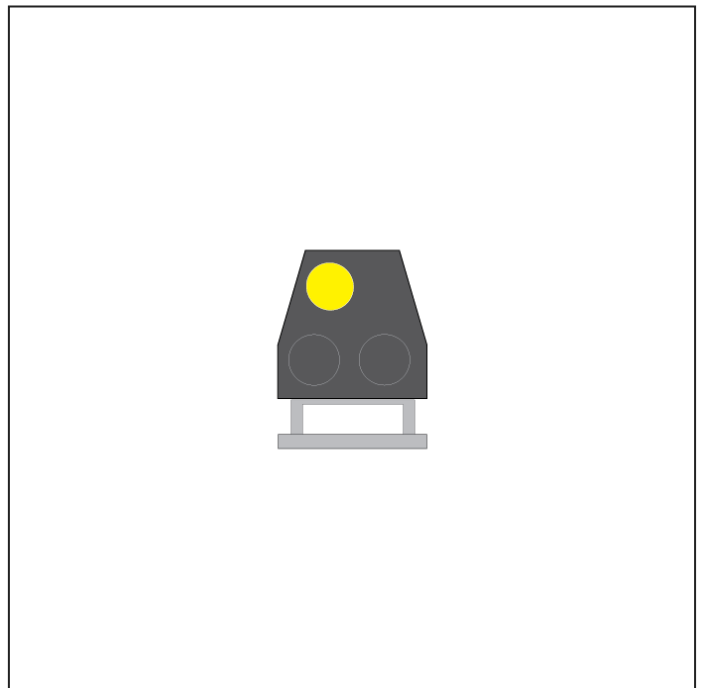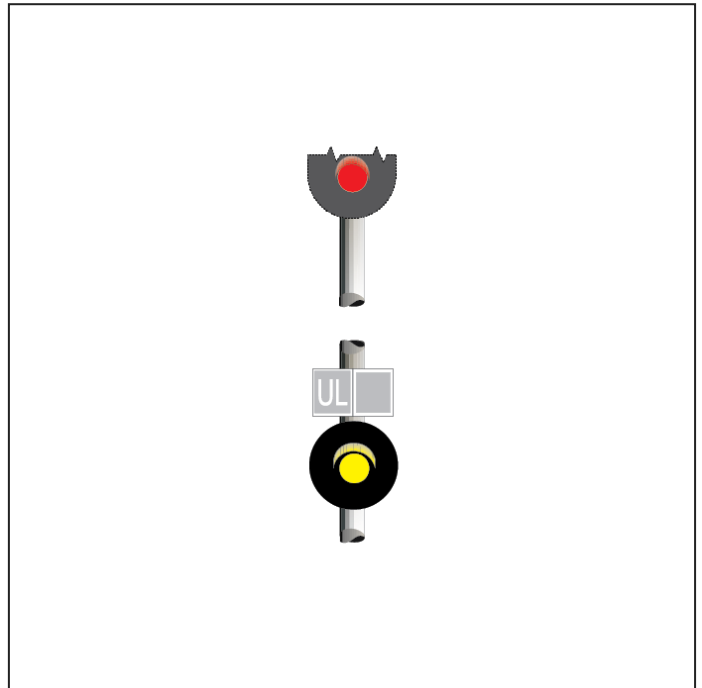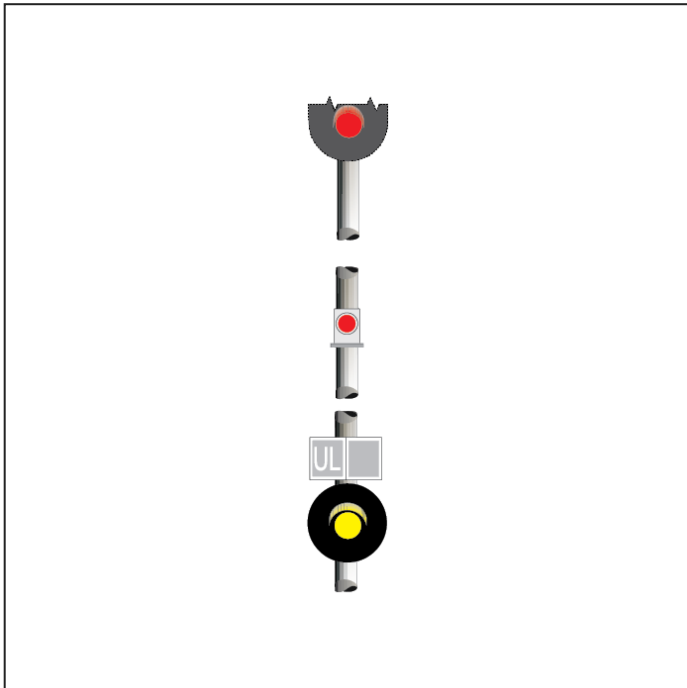

Signals and Signs

NSG 602 Shunting signals






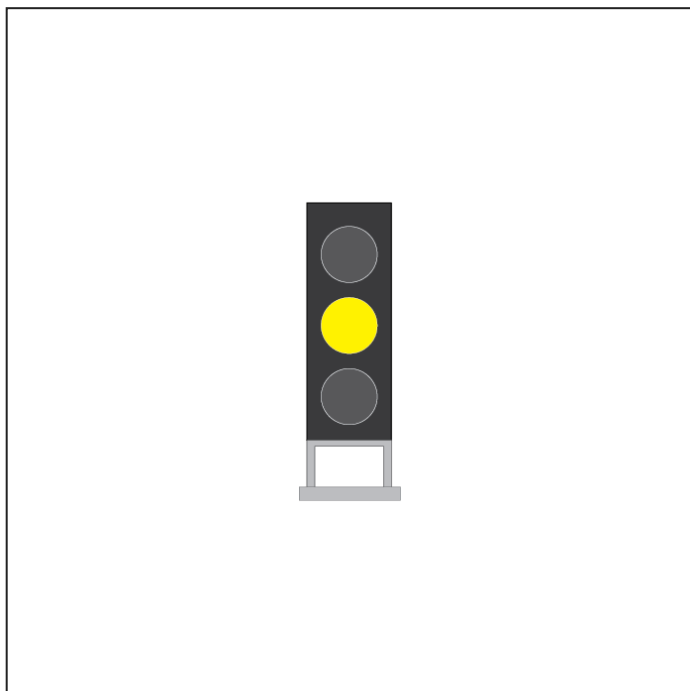


FIGURE 3: Examples of colour light shunting signals displaying STOP

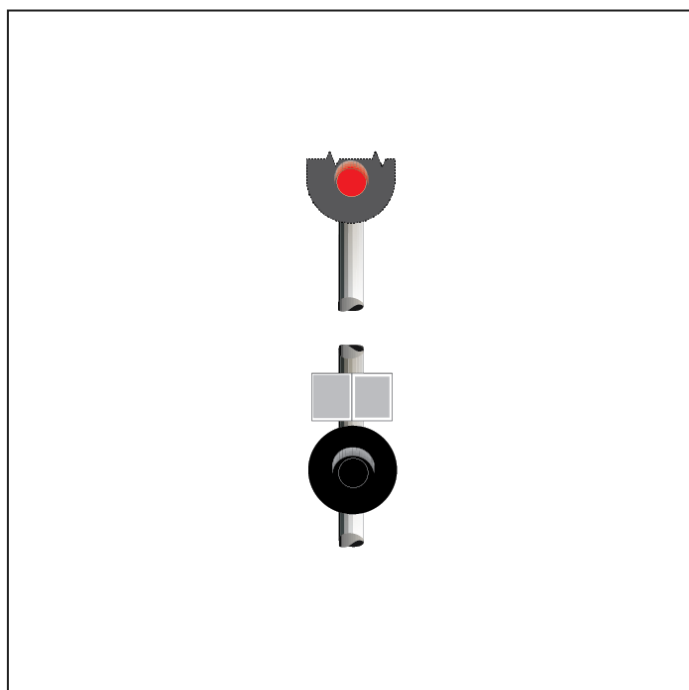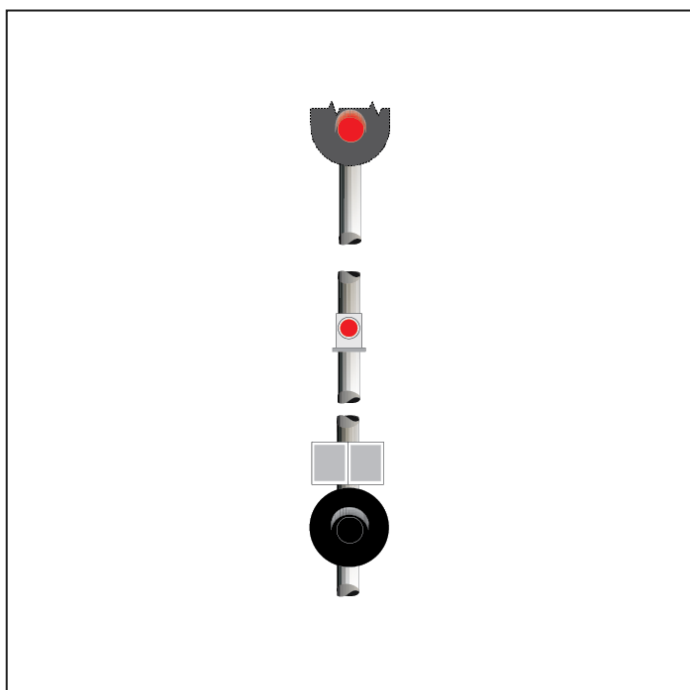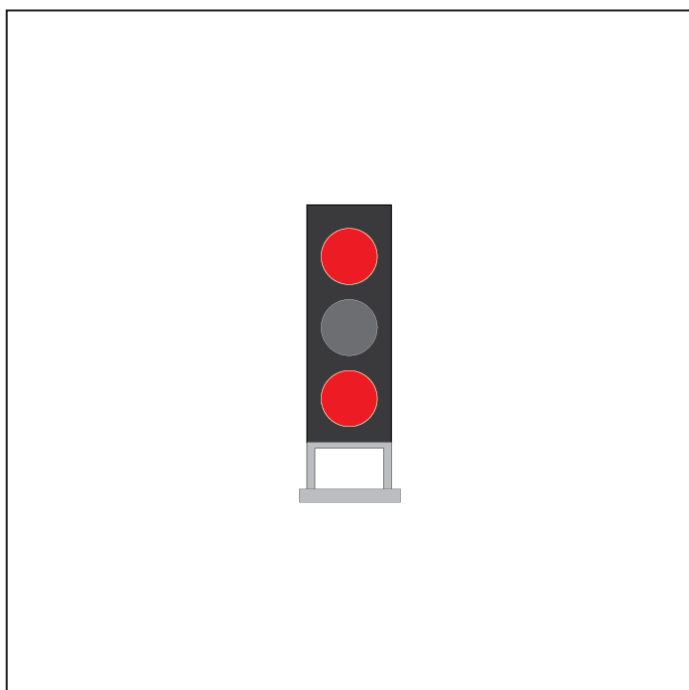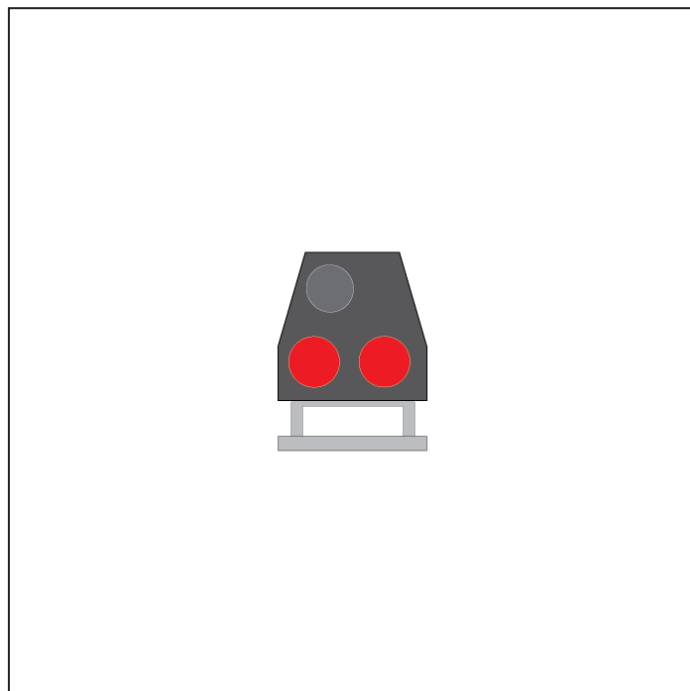

Signals and Signs




NSG 602 Shunting signals

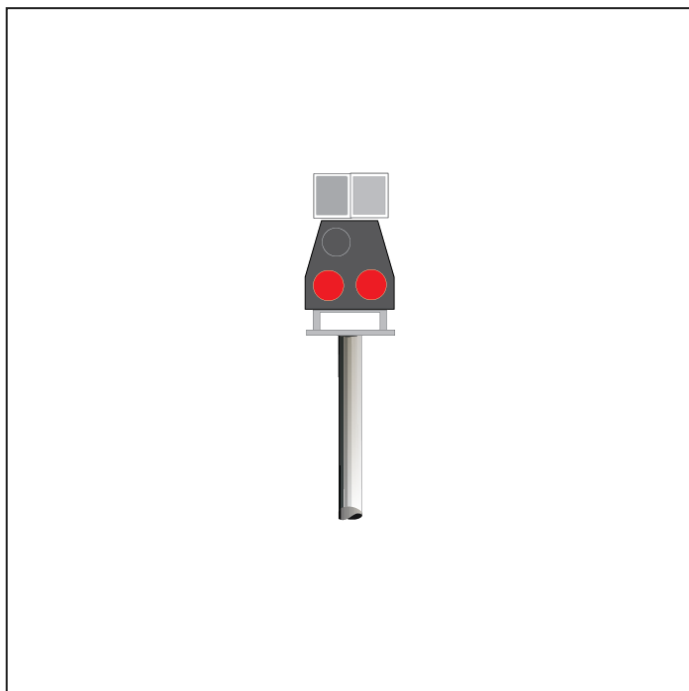

Signals and Signs

NSG 602 Shunting signals




FIGURE 4: Examples of semaphore shunting signals displaying PROCEED

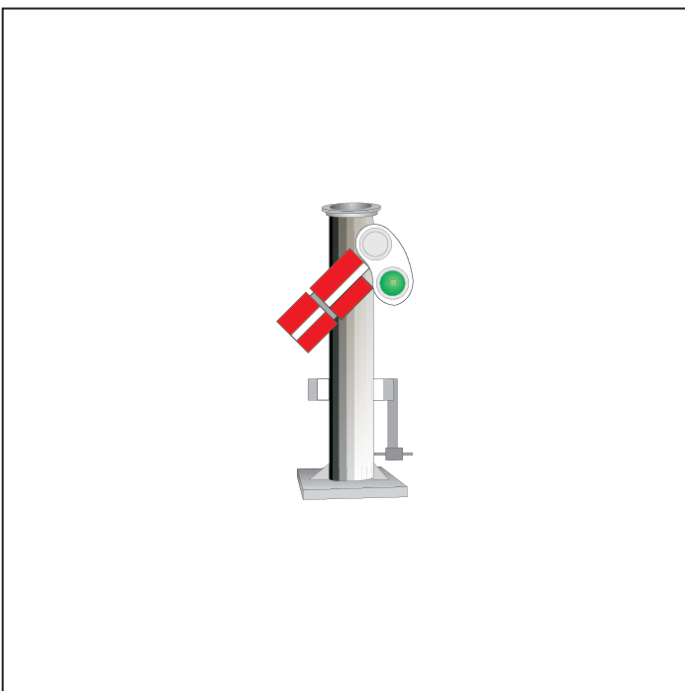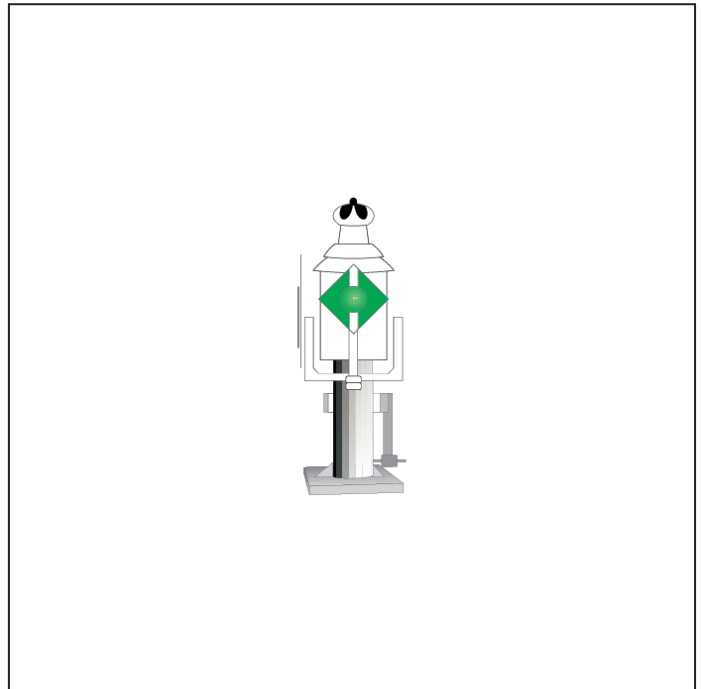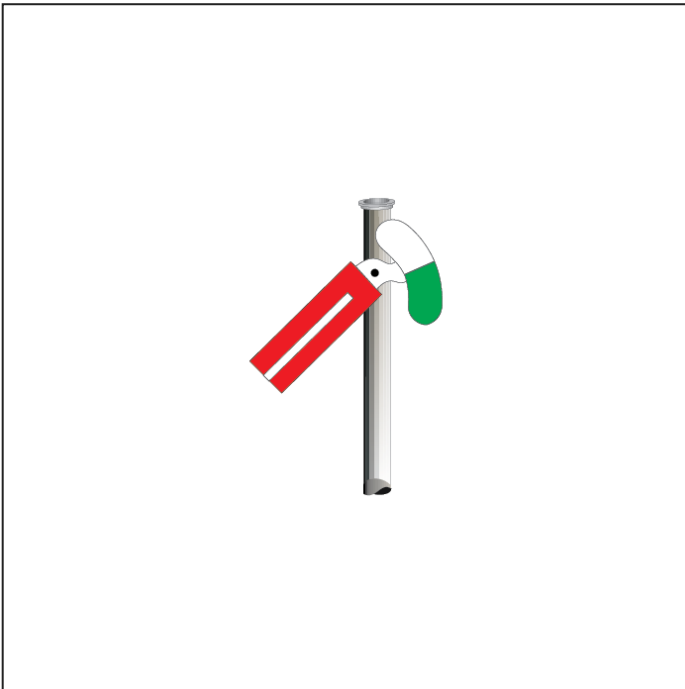

Signals and Signs

NSG 602 Shunting signals

FIGURE 5: Examples of semaphore shunting signals displaying STOP

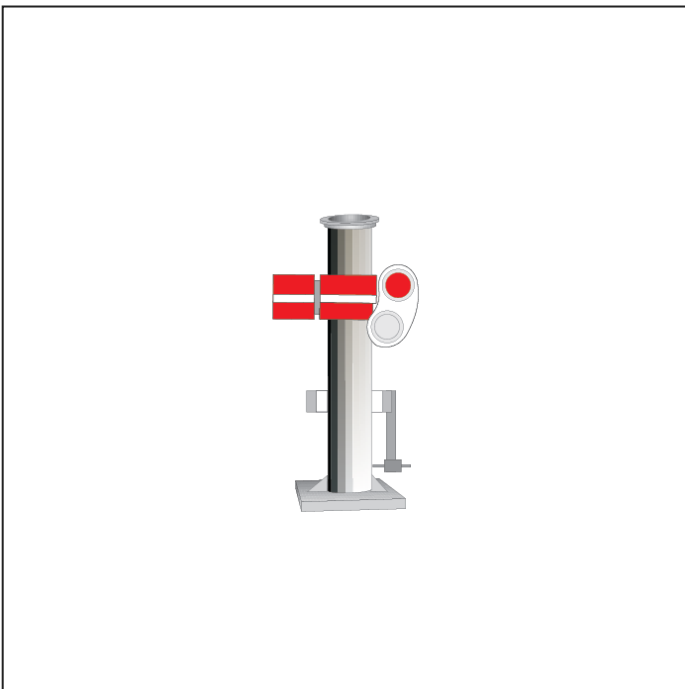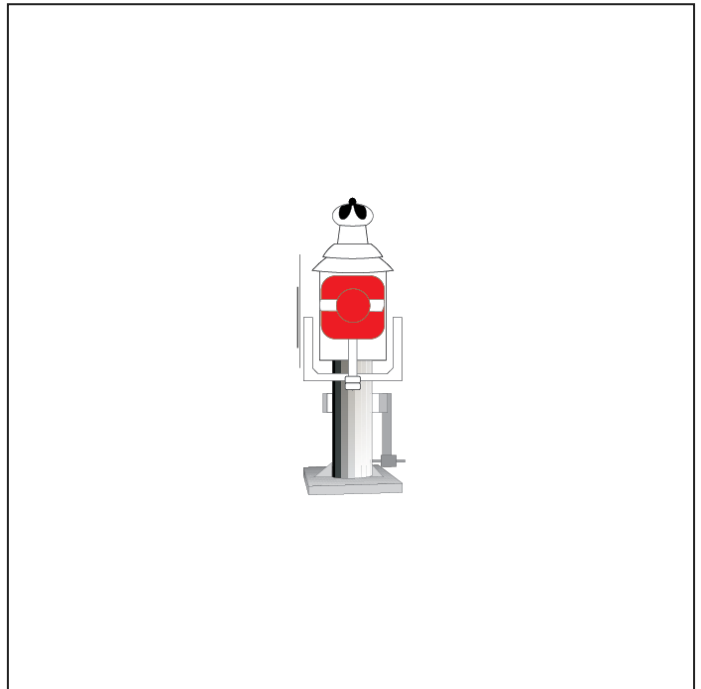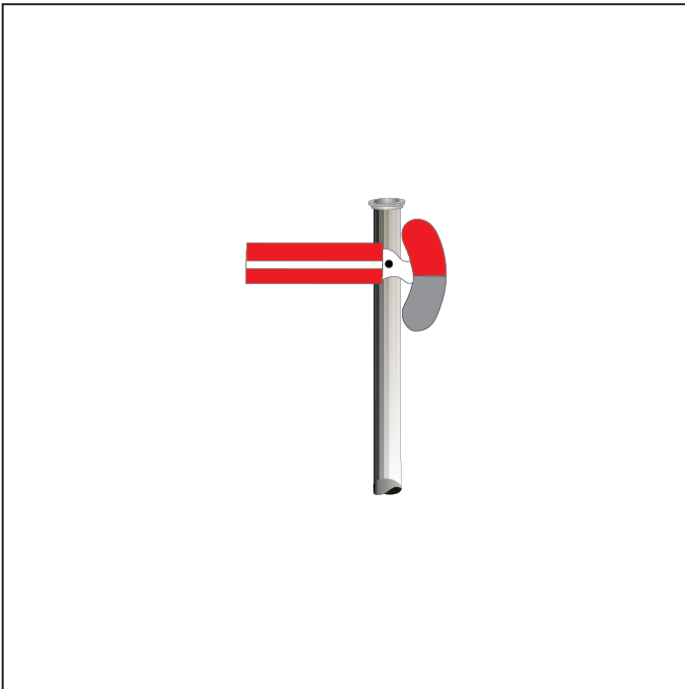

Intermediate shunting signals

Signals and Signs


NSG 602 Shunting signals

Intermediate shunting signals are placed between two running signals, facing in the same direction as the running signals.

When the first running signal displays a **PROCEED** indication, the intermediate shunting signal displays **PROCEED** for the running movement.



An intermediate shunting signal may be used to authorise a shunting movement.

FIGURE 6: Examples of intermediate shunting signals

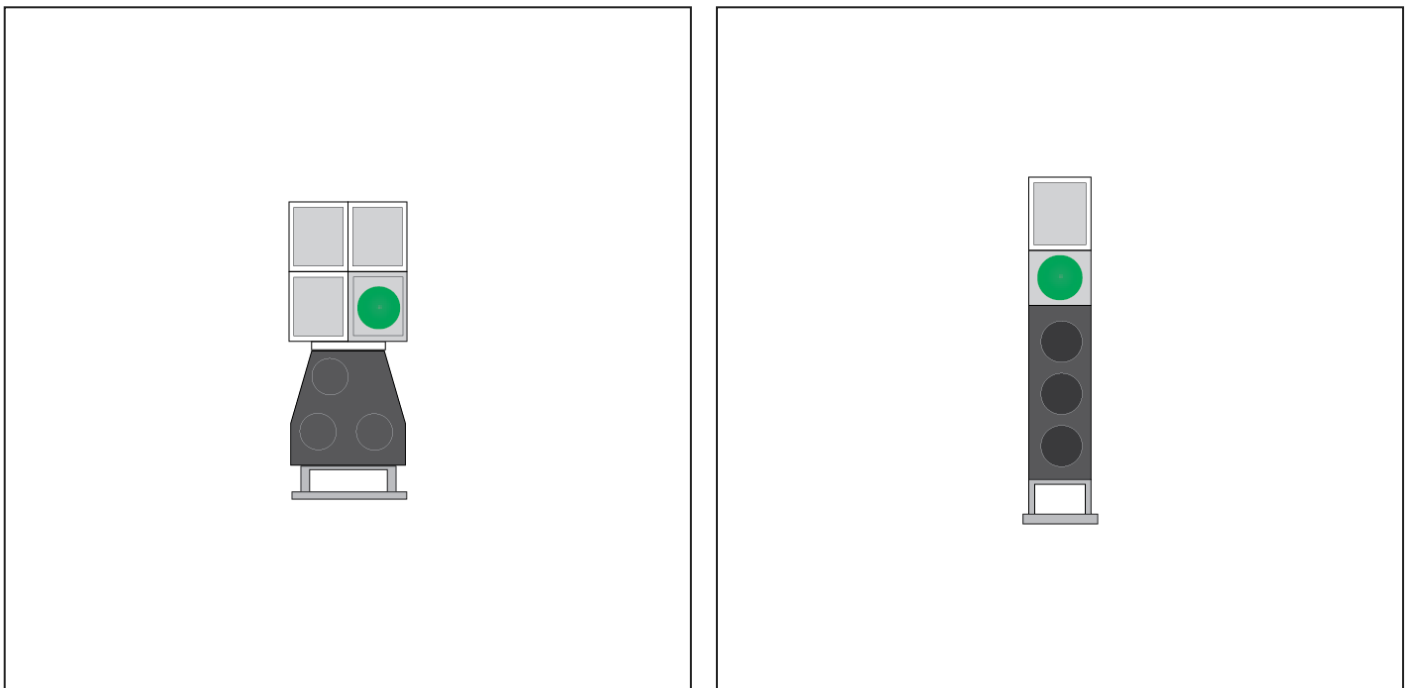

Signals and Signs

NSG 602 Shunting signals

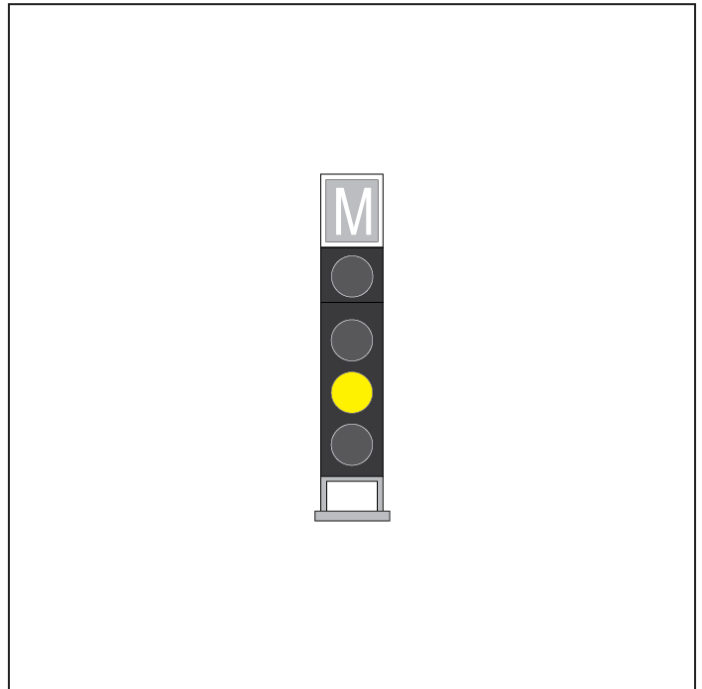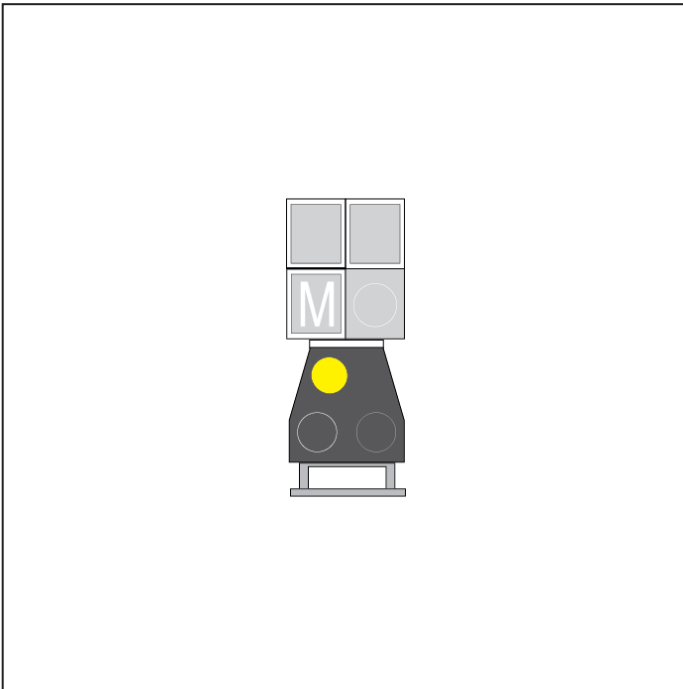

Shunt repeater signals

A SHUNT REPEATER sign designates a shunt repeater signal.


Shunt repeater signals:

- are placed as subsidiary signals below controlled running signals, and
- show that the shunting signal below the next running signal displays a **PROCEED** indication.

Signals and Signs

NSG 602 Shunting signals

FIGURE 7: At left, the shunt repeater signal shows that the next shunting signal displays PROCEED. At right, a shunt repeater sign

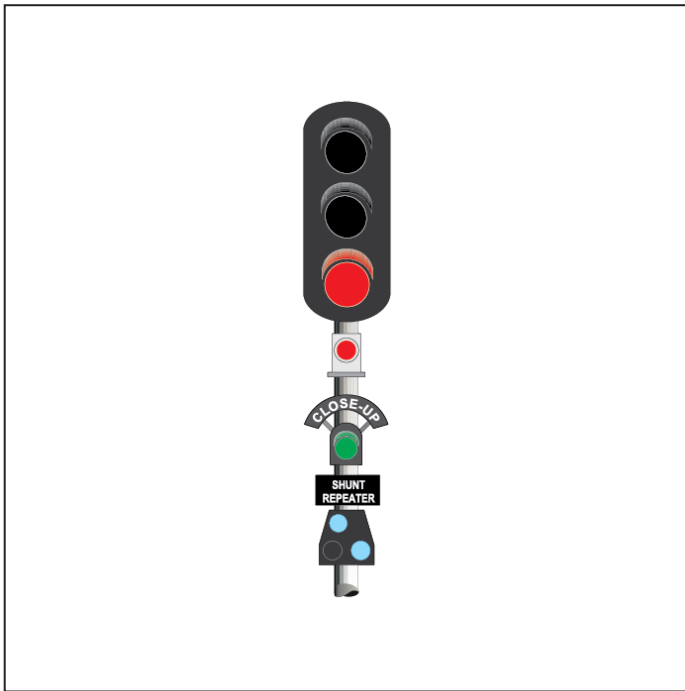

Calling on signals

Calling on signals:

- are fitted as subsidiary signals to home signals
- authorise a movement past the running signal
- indicate that the points in the route are locked, but do not indicate that the line ahead is clear.

Signals and Signs

NSG 602 Shunting signals

FIGURE 8: Stencil light calling on signal





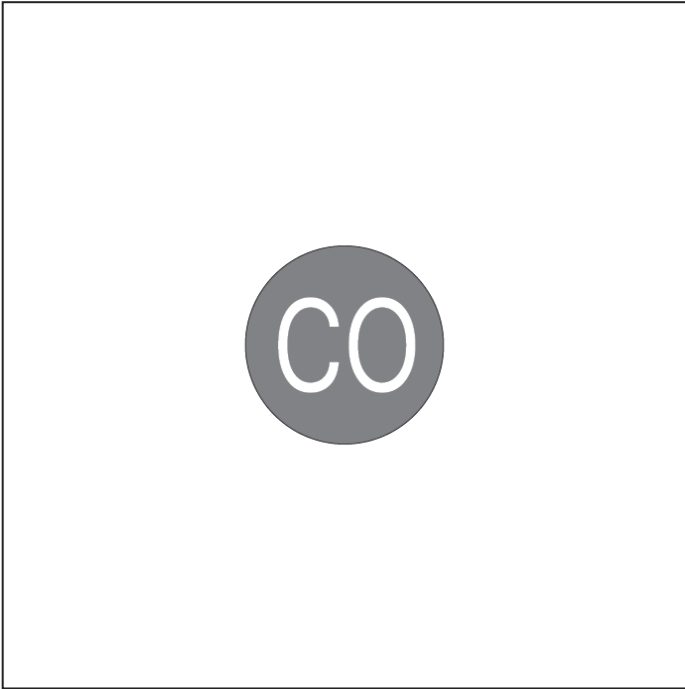


FIGURE 9: Examples of colour light calling on signals displaying PROCEED. These signals may be referred to as shunting signals

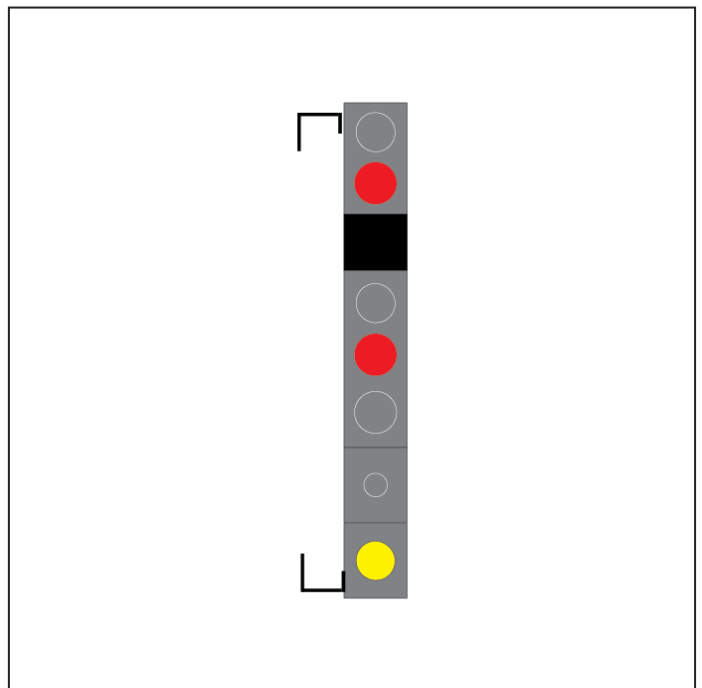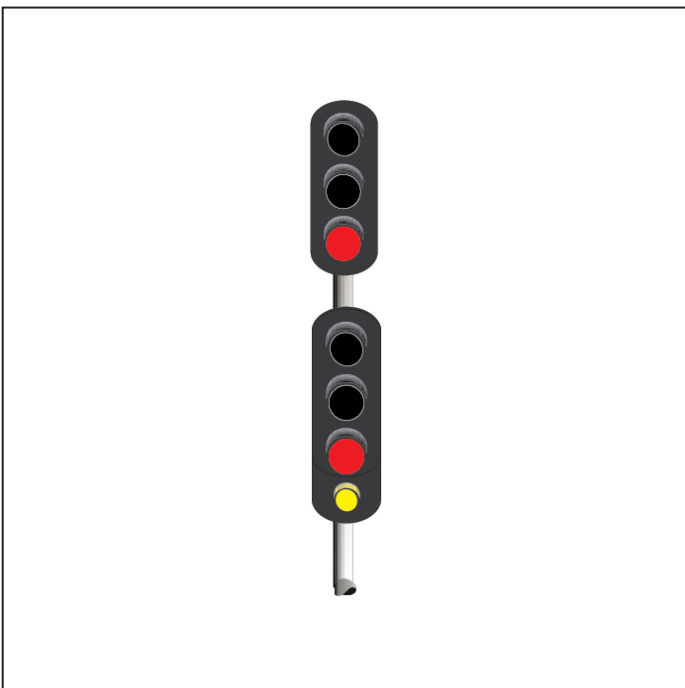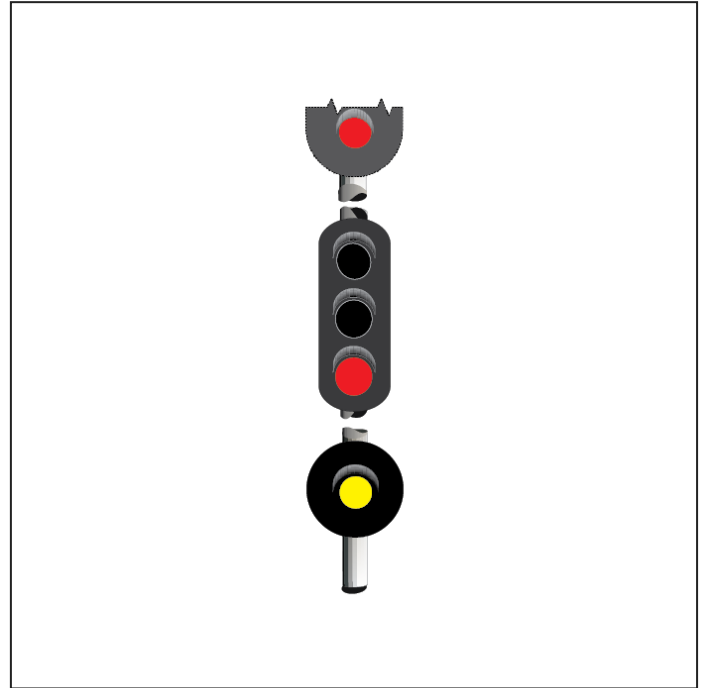

Signals and Signs

NSG 602 Shunting signals

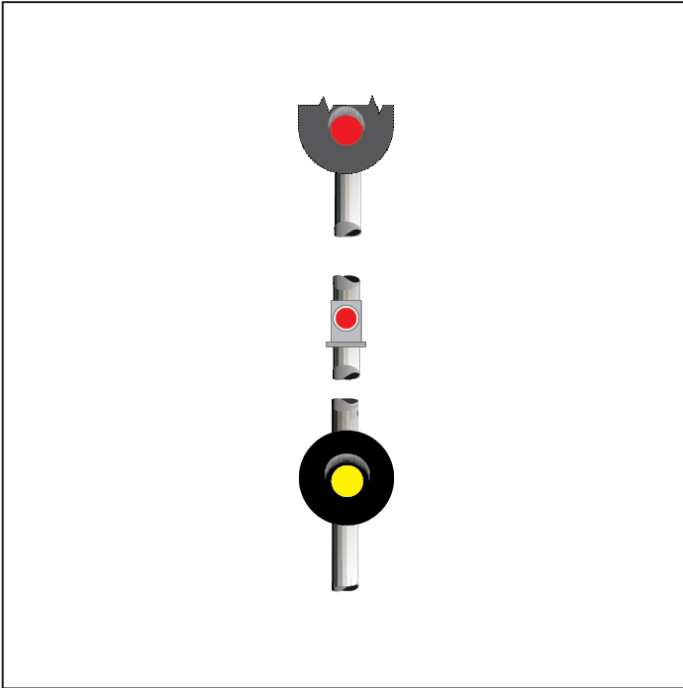

Shunt ahead signals

Shunt ahead signals:


- are fitted as subsidiary signals to starting signals or home/starting signals
- authorise a shunting movement past that signal.

Shunt ahead signals must not be used as an authority to proceed through a section.

Signals and Signs

NSG 602 Shunting signals

FIGURE 10: Examples of shunt ahead signals displaying PROCEED

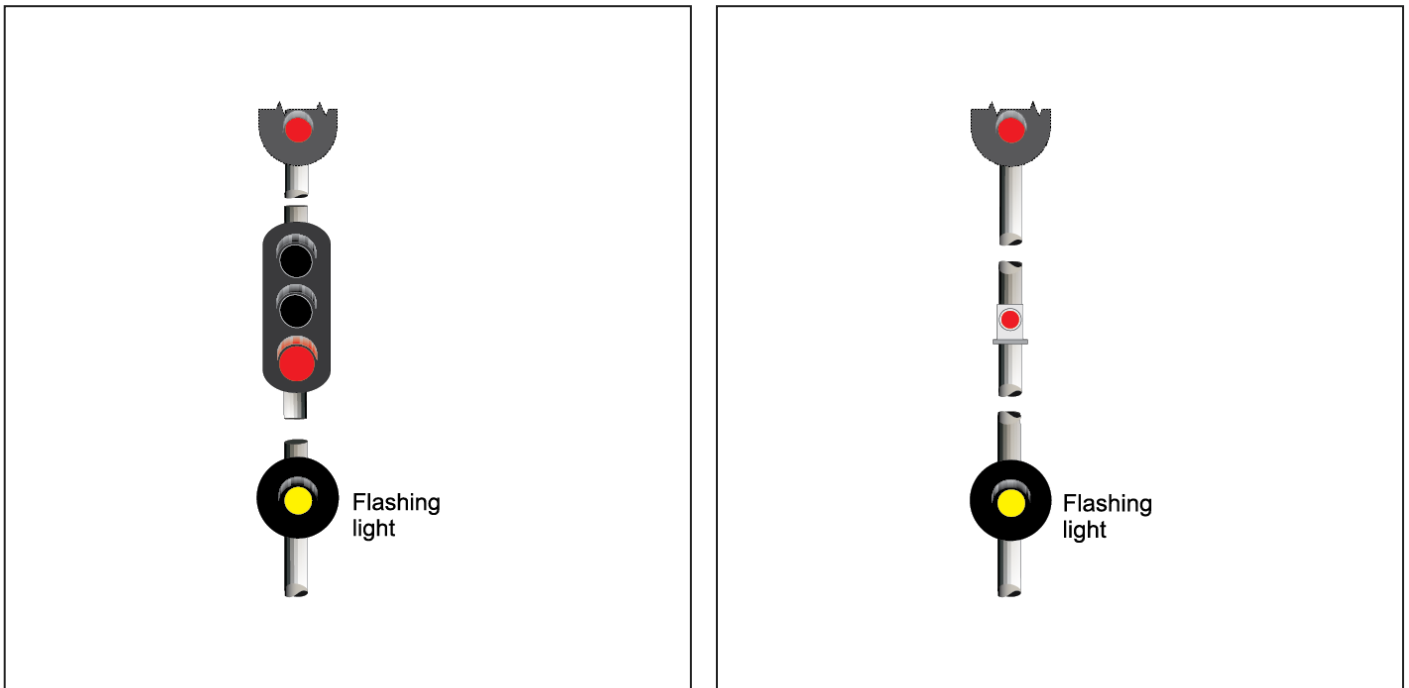

Dead end signals


Dead end signals:

- are fitted as a subsidiary signal to home or home/starting signals only
- are on brackets placed on the same side as the route for the authorised movement, usually a dead end siding
- authorise a shunting movement from the running line to a dead end siding
- may be used for movement from a running line to a yard or loop.

Signals and Signs

NSG 602 Shunting signals

FIGURE 11: Examples of dead end signals displaying PROCEED

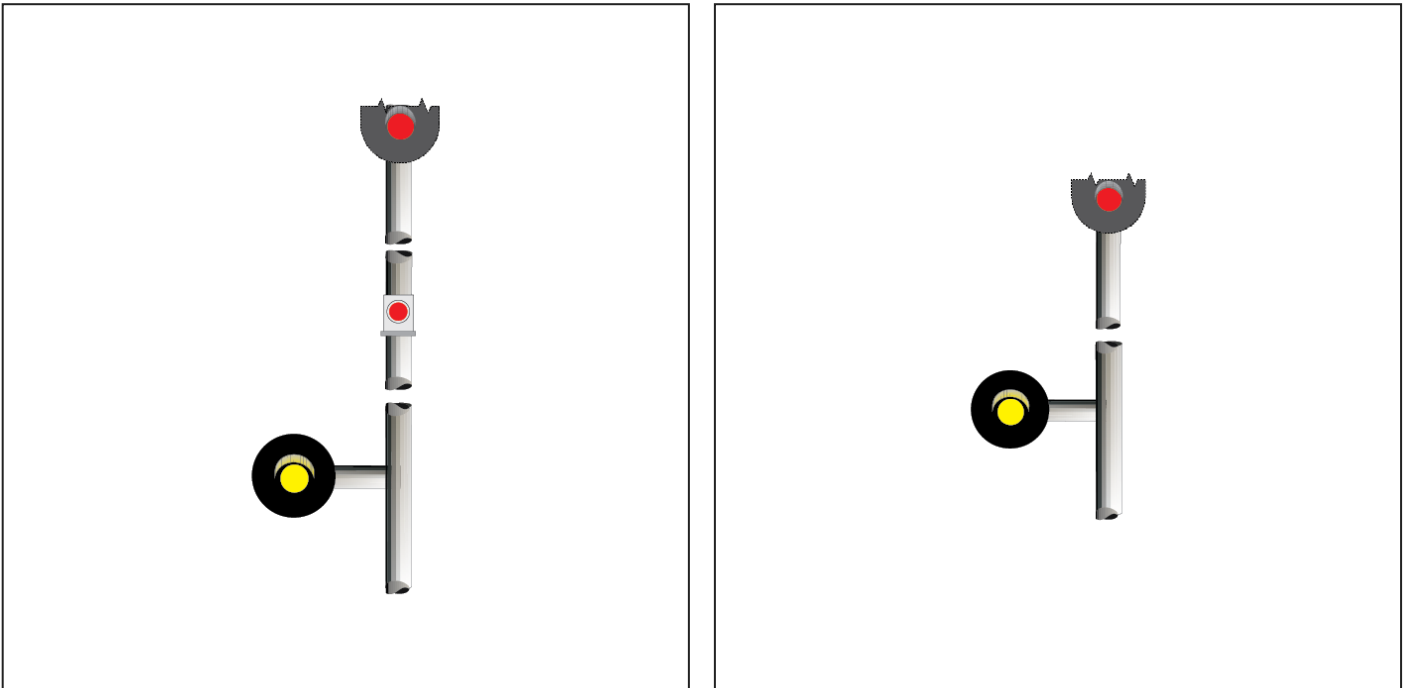

Wrong road signals

Wrong road signals authorise shunting movements to the limit of authority in the wrong running-direction.

Signals and Signs

NSG 602 Shunting signals

FIGURE 12: Examples of wrong road signals displaying PROCEED

