

# ATWS Worksite Protection for Ingleburn routine network maintenance activities

<b>DOCUMENT NO.</b>	D2023 /2235
<b>WORK DESCRIPTION</b>	Routine Network Maintenance activities
<b>WPP Number</b>	SW13BWS 10044
<b>SCOPE:</b>	<p>Routine maintenance activities performed by network maintenance team.</p> <ul style="list-style-type: none"> <li>on the <b>Down Main South</b> line between <b>47.739 km</b> to <b>47.987 km</b></li> <li>that does not involve the use of tools or equipment, or</li> <li>using tools which can be easily and immediately removed from the track by one person and are light, non-powered hand tools, or light battery powered tools or devices.</li> </ul>
<b>AUTHORISATIONS:</b>	<p><b>Protection Officer, ATWS Operator (Operator) &amp; ATWS Installer (Installer):</b></p> <ul style="list-style-type: none"> <li>Protection Officer (PO) Level 1 – 4, and</li> <li>WATWS – Wireless Automatic Track Warning System</li> </ul>
<b>PERSONAL PROTECTIVE EQUIPMENT</b>	<ul style="list-style-type: none"> <li>High visibility vest, boots, high visibility lookout sleeve</li> </ul>
<b>SAFETY CONTROLS – Lookout Working (ATWS) arrangements:</b>	<ul style="list-style-type: none"> <li>Automatic Track Warning System (ATWS) - provides visual and audible warning for workers.</li> <li>ATWS sensor for <b>Down Main South</b> direction running on the line at <b>46.850 km</b>.</li> </ul> <p><b>IMPORTANT!</b></p> <ul style="list-style-type: none"> <li>This document must not be used to install or adjust the ATWS sensors.</li> <li>All sensors in the plan and shown on the diagram must be connected to transmit a warning</li> </ul>
<b>PRESTART REQUIREMENTS:</b>	<ul style="list-style-type: none"> <li>Refer to D2015-45354 Wireless ATWS (Automatic Track Warning System) to install or remove sensors</li> </ul>
<b>FURTHER INFORMATION:</b>	<p>Refer to “D2015-45354 Wireless ATWS (Automatic Track Warning System)” for detailed instructions to set-up, connect, test, and operate the ATWS system with pre-installed ATWS sensors.</p> <p>NWT 300 Planning work in the Rail Corridor</p> <p>NLA 500 Lidcombe - Campbelltown</p>

Required ATWS Equipment		
Item	Description	Quantity
Aerial	Telescopic Aerial	2
Assembly Kit	Orange Bag with Tools	1
Battery ZA24-2.9	Small battery for Junction Box & Transmitter	4
Device Frame	Protective Frame	2
F500-AB Junction Box	Receiver Device	1
F500-SEN Train Sensor	Sensor	1
Housing for Aerial	Housing for Telescopic Aerial	2
KF5-5 Extension Cable	Extension Cable (5m) for F500-SEN to F500-AB	0
Mobile Backpack	Harness for Device	1
Pouch	Pouch for small battery	2
Tripod	Tripod for Device	1
ZFS Radio Transmitter	Radio Transmitter Device	1
ZPW Warning Unit	Control & Warning Device	1

## Protection Officer/Operator assessment checklist

<b>Protection Officer's name:</b>		<b>Yes</b> (Tick if yes)
This document has not expired 12 months beyond the issue date.		
SWI details and protection arrangements have been reviewed and validated for the assessed worksite location, including: <ul style="list-style-type: none"> <li>On-site safety assessment has been completed for relevancy of works being undertaken.</li> <li>The required protection details, environment and tasks are unchanged from the details of this SWI.</li> <li>All boxes have been ticked if applicable and crossed if not applicable.</li> <li>All fields have been completed.</li> </ul>		
<b>Corridor Safety Number</b>	<b>Protection Officer Signature</b>	<b>Date</b>

### Warning



*If an above item does not apply, the Protection Officer must not use this Safe Work Instruction. A new worksite protection plan must be completed in accordance with NRF 014 Worksite Protection Pre-work briefing and NRF 015 Worksite Protection Plan.*

# ATWS Worksite Protection for Ingleburn routine network maintenance activities



## Worksite Protection Pre-work Briefing

Briefing date: 

### Protection Officer details

name  signature  contact No.

Work location: Scope of work: Worksite protection:  Refer to Worksite Protection Plan for details

Hazards (e.g. Site-specific hazards identified, including physical environment, human errors, plant, and equipment)	Controls (to be implemented to eliminate or reduce the risk to the lowest practicable level)	Person responsible for Control
<b>Crossing live lines</b>	A qualified Protection Officer (PO) or Access Corridor Safety (ACS) must make a safety assessment to cross live lines in accordance with NGE200 and supervise workers who do not hold the PO or ACS qualification.	Qualified PO/ACS
<b>Accessing Danger Zone to conduct plate test</b>	Use appropriate safety measures as validated by a PO. Refer to diagram for minimum safety assessment.	Qualified PO
<b>Electricity</b>	ATWS antennae not to encroach safe approach distance to overhead wiring	Operator
<b>Slips, trips, falls carrying ATWS equipment</b>	Use correct manual handling techniques, secure safety boots, clear obstacles for work area and agree a safe path.	All
<b>Approaching rail traffic</b>	Lookout Working using approved ATWS as assessed in the plan & diagram. All points of entry have been validated and ATWS safety measures (sensors) have been installed. Confirm with the Operator that the ATWS has been tested and is operational. Workers immediately move to the designated safe place when warned. Provide ALL CLEAR hand signal after workers and equipment are in a safe place. After the warning has been cancelled, confirm there is no approaching rail traffic between the sensors and the worksite before allowing work to resume.	PO
<b>Ineffective ATWS warnings / Adjoining / surrounding worksites</b>	Test and confirm workers can see and hear the warning in the noisiest environment. Explain the emergency warnings. Workers to be within 50m of warning device. Workers to remain within sight and hearing of warning unit at all times. Radios not to be used near ATWS.	PO
<b>Train warning time longer than expected (stopping points or ATWS equipment fault)</b>	Workers to remain in a safe place until confirmed the ATWS is working correctly. Contact the Signaller or visually confirm the line is clear between the sensors and the worksite.	PO
<b>Adjacent live lines</b>	Remain within the tracks being protected by the ATWS. Lookouts must provide warning to workers when rail traffic is approaching from the adjacent line in either direction	PO
<b>Second train warning cancelled in error</b>	Nominate a team member to confirm with the Operator when each rail traffic has completely passed the worksite. Tell the PO and workers about the second train warning. Cancel each warning after each train has completely passed the worksite.	Operator / nominated team member
<b>Distraction</b>	Obtain permission from PO to use electronic devices in the Danger Zone.	All
<b>Obstructions to safe place</b>	Agree on paths to reach designated safe places from the worksite.	PO
<b>Electrical storms</b>	Stop work immediately	All





# ATWS Worksite Protection for Ingleburn routine network maintenance activities



## Worksite Protection Plan – Lookout Working

### Signaller details

	<b>Glenfield Panel</b>	<b>02 8568 3442</b>
--	------------------------	---------------------

### Protection Officer details

name	signature	contact No.
RSW or RIW No.	designation	Planned duration

Workplace Supervisor details:

Type of work: **Routine Network Maintenance Activities**

**Worksite location**

On the

between  and

### Worksite Assessment


Has the Lookout Working Prohibited Locations Register been consulted? Yes

### Warning method

### Minimum Warning Time Calculations

Maximum track speed

Number of ATWS Sensors used  Position of ATWS Sensors  and

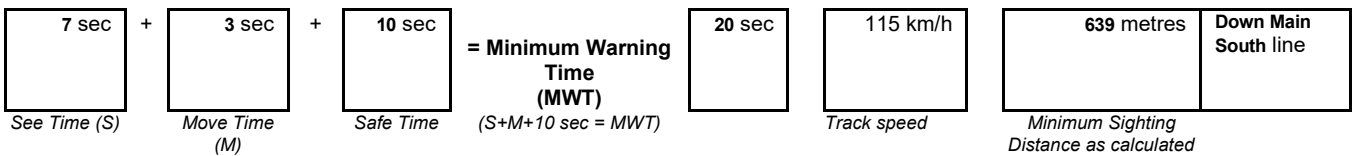

### Where are the safe places identified for the ATWS Operator, Lookouts, and workers?

Lookouts:

Workers:

Confirm mandatory first train tests were completed for all sensors Yes

Ensure the workers have been briefed about these work details Yes

NOTE: Diagrams and instructions that follow form part of this worksite protection plan.

**ATWS Check-sheet**

**Planning**

---

**1. How will the installed location of sensor(s) be verified?**

- The PO will have direct line of sight to the sensor from the worksite location.
- The installer will travel from the sensor location to the worksite location on the same side of track.
- The ID no. of the first train will be verified between the operator and installer.

Train ID # observed:

Verified by installer:  (tick to confirm)

**Testing**

---

**2. Record evidence of mandatory First Trains Tests:**

a. Record Train ID # or type of train observed for all sensors:

b. Confirm mandatory first train tests are complete for all sensors installed  (tick to confirm)

**Pre-work Briefing**

---


**3. Identify potential stopping points affecting warning times:**

Record any potential stopping points e.g. (stations or signals) between the sensor(s) and worksite which could cause variable warning times:

**NA**

Note: Factors affecting warning times should be highlighted to staff during the pre-work brief

**Worksite on Down Main South lines.**

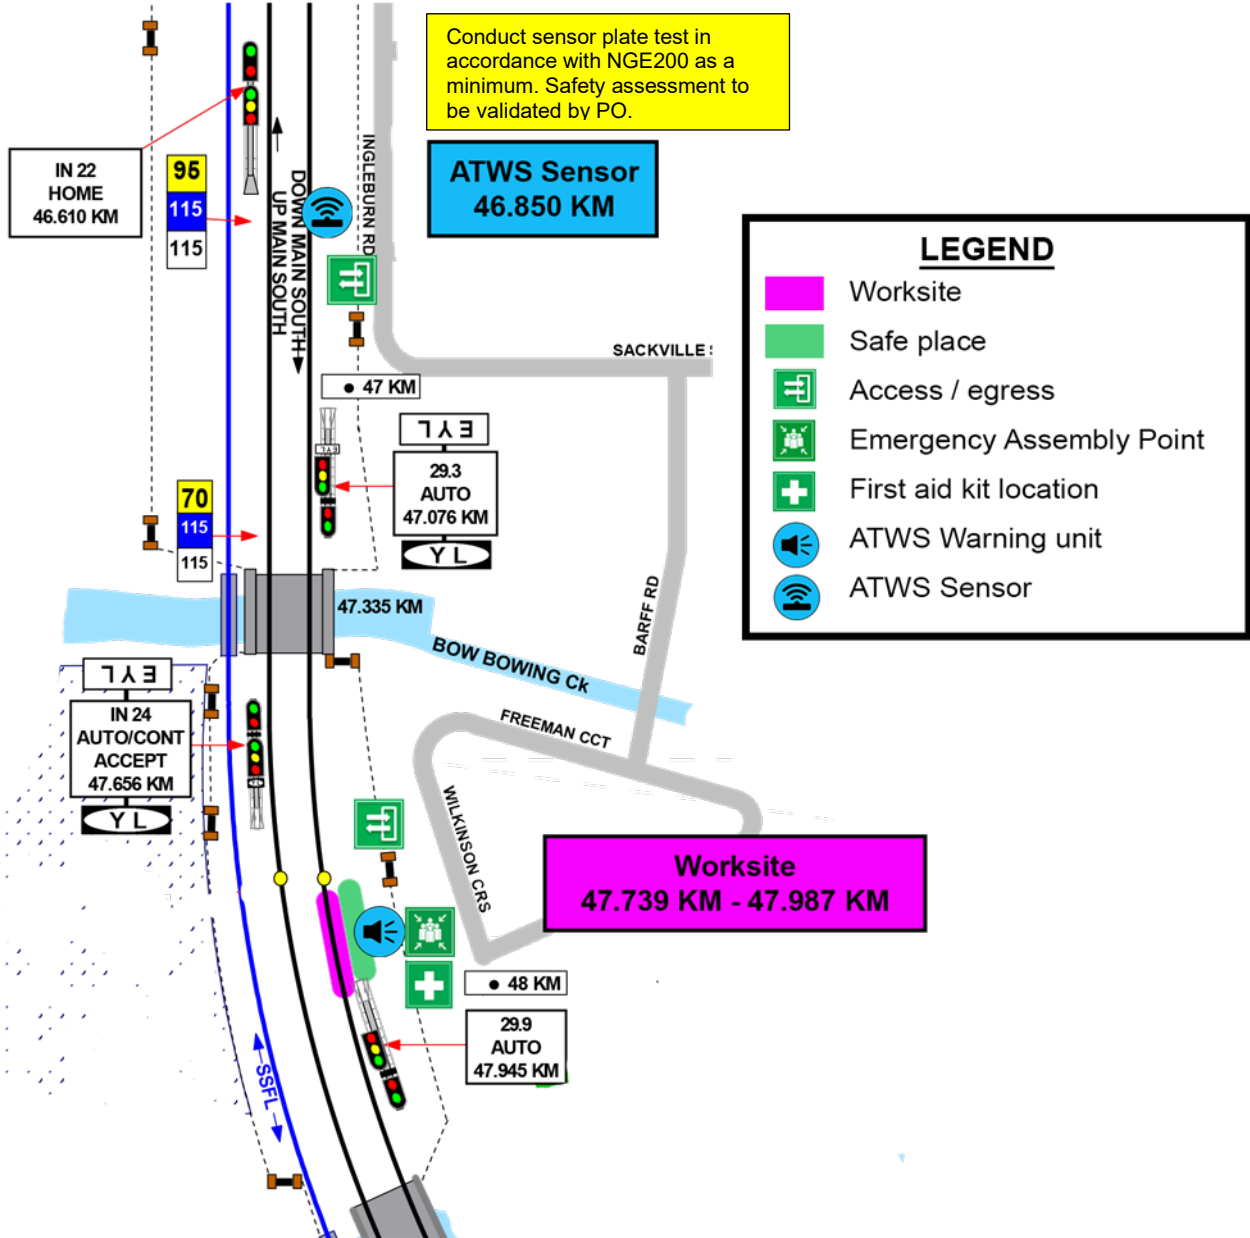

**LEGEND**

- Worksite
- Safe place
- ⏏ Access / egress
- 🚒 Emergency Assembly Point
- + First aid kit location
- 🔊 ATWS Warning unit
- 📶 ATWS Sensor



# ATWS Worksite Protection for Ingleburn routine network maintenance activities

INSTRUCTIONS:	<ol style="list-style-type: none"> <li>Workers enter the rail corridor via access gate <b>S00 47.505 D</b>.</li> <li>Use assets to validate worksite location on <b>Down Main South</b> between 47.739 km to 47.987km</li> <li>Conduct WP Pre-work briefing to set-up ATWS.</li> <li>Tell Signaller at Glenfield Panel about the use of lookout working with ATWS.</li> </ol>
	<ol style="list-style-type: none"> <li>Access Down Cess <b>46.850</b> km, verify sensor label, connect to sensor cable, calibrate with test plate, connect &amp; turn on transmitter.</li> </ol>
	<ol style="list-style-type: none"> <li>Place warning system on same side of tracks if working on one track only within sight &amp; hearing of workers, conduct siren &amp; light self-test, &amp; connect to transmitter(s).</li> <li>Record first rail traffic movement test for each sensor on ATWS Check-sheet.</li> <li>Conduct WP Pre-work briefing for lookout working with ATWS and confirm workers have seen and heard the warning.</li> <li>Start work when advised by the PO and move to the designated safe place when warned.</li> <li>When work is complete, and workers and equipment are in a safe place, turn off and pack up warning unit</li> </ol>
	<ol style="list-style-type: none"> <li>Access Dn Cess to turn off and pack up transmitter unit(s).</li> </ol>
	<ol style="list-style-type: none"> <li>Access Down Cess for all workers to leave the rail corridor via access gate <b>S00 47.505 D</b>.</li> <li>Tell Signaller at Glenfield Panel when work is completed, and the workers and their equipment are clear of the Danger Zone.</li> </ol>


**Position of ATWS transmitter and sensor on Down Main South line at 46.850 KM**



**Image 1:** Sensor and transmitter installation location



**Image 2:** Sensor access using access gate **S00 46.947 D**

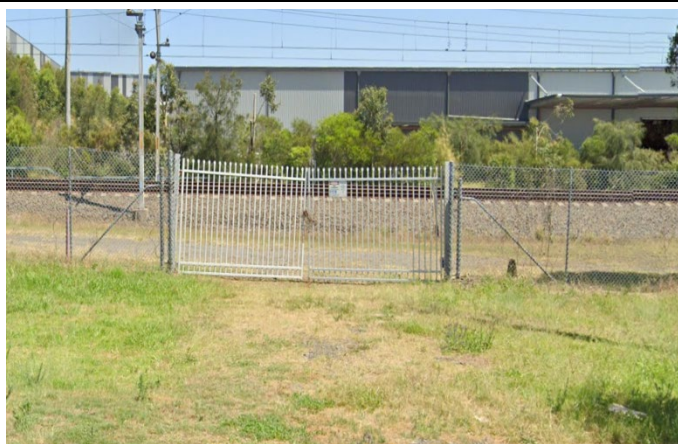

**Image 3:** worksite Access gate **S00 47.505 D**.



# ATWS Worksite Protection for Ingleburn routine network maintenance activities

*(This page is optional and may be separated and given to the assigned operator to assist set-up of ATWS equipment. Refer also to Refer to "D2015-45354 Wireless ATWS (Automatic Trak Warning System)" for detailed instructions.)*

## Setup Stage 1: Checklist for ATWS transmitter and sensor

Step	Task Description	Installer Check
1	Verify Track Label for location of sensor as per the Protection Diagram and Photos in this document	
2	Confirm equipment is within inspection date	
3	Sensor direction is per Worksite Protection Diagram and photos in this document	
4	Connect sensor cable to junction box	
5	Confirm all batteries are fully charged	
6	Connect junction box to ZFS using channel T1-T4	
7	Commence calibration and automatic self- test	
8	Perform function test using test plate	
9	Confirm transmitter booked in to correct T- channel (T1-T4)	
10	Select & confirm channel for the radio transmitter (AU3 OR AU4)	
11	Perform worksite warning test using test plate	
12	Lock device & remove key	

## Setup Stage 2: checklist for ATWS worksite warning unit

Step	Task Description	Operator Check
1	Confirm equipment is within inspection date	
2	Confirm Audible level	
3	Confirm and set Radio Channel for Warning unit	
4	Book in ATWS sensor 1	
5	Perform Worksite Warning Test with all ATWS sensor	
6	Ensure the workers have seen the visual warning and heard the audible warning	
7	Select and Confirm Channel for the Radio Transmitter	
8	Confirm worksite warning unit is operational with Installers and advise them to lock devices & remove key	