

# ATWS Worksite Protection for Medlow Bath condition and monitoring equipment maintenance

<b>DOCUMENT NO.</b>	D2022/3750
<b>WORK DESCRIPTION</b>	Routine Maintenance activities - Condition monitoring equipment maintenance
<b>WPP Number</b>	CM05BWS 10178
<b>SCOPE:</b>	<p>Routine maintenance activities performed by Condition Monitoring Operations team.</p> <ul style="list-style-type: none"> <li>on the <b>Up Main</b> and <b>Down Main</b> lines between <b>114.470 km</b> to <b>114.576 km</b></li> <li>that does not involve the use of tools or equipment, or</li> <li>using tools which can be easily and immediately removed from the track by one person and are light, non-powered hand tools, or light battery powered tools or devices.</li> </ul>
<b>AUTHORISATIONS:</b>	<p><b>Protection Officer, ATWS Operator (Operator) &amp; ATWS Installer (Installer):</b></p> <ul style="list-style-type: none"> <li>Protection Officer (PO) Level 1 – 4, and</li> <li>WATWS – Wireless Automatic Track Warning System</li> </ul>
<b>PERSONAL PROTECTIVE EQUIPMENT</b>	<ul style="list-style-type: none"> <li>High visibility vest, boots, high visibility lookout sleeve</li> </ul>
<b>SAFETY CONTROLS – Lookout Working (ATWS) arrangements:</b>	<ul style="list-style-type: none"> <li>Automatic Track Warning System (ATWS) - provides visual and audible warning for workers</li> <li>Installed ATWS sensors for Down direction running on the <b>Down Main</b> line at <b>113.885 km</b></li> <li>Installed ATWS sensors for Up direction running on the on <b>Up Main</b> line at <b>115.217 km</b> <b>IMPORTANT!</b></li> <li>This document must not be used to install or adjust the ATWS sensors</li> <li>All sensors in the plan and shown on the diagram must be connected to transmit a warning</li> </ul>
<b>PRESTART REQUIREMENTS:</b>	<ul style="list-style-type: none"> <li>Refer to D2015-45354 Wireless ATWS (Automatic Track Warning System) to install or remove sensors</li> </ul>
<b>FURTHER INFORMATION:</b>	Refer to “D2015-45354 Wireless ATWS (Automatic Track Warning System)” for detailed instructions to set-up, connect, test and operate the ATWS system with pre-installed ATWS sensors

Required ATWS Equipment		
Item	Description	Quantity
Aerial	Telescopic Aerial	3
Assembly Kit	Orange Bag with Tools	1
Battery ZA24-2.9	Small battery for Junction Box & Transmitter	4
Device Frame	Protective Frame	3
F500-AB Junction Box	Receiver Device	2
F500-SEN Train Sensor	Sensor	2
Housing for Aerial	Housing for Telescopic Aerial	3
KF5-5 Extension Cable	Extension Cable (5m) for F500-SEN to F500-AB	0
Mobile Backpack	Harness for Device	0
Pouch	Pouch for small battery	2
Tripod	Tripod for Device	3
ZFS Radio Transmitter	Radio Transmitter Device	2
ZPW Warning Unit	Control & Warning Device	1

**ATWS Worksite Protection for Medlow Bath condition and monitoring equipment maintenance**



**Protection Officer/Operator assessment checklist**

Protection Officer's name:		<b>Yes</b> <i>(Tick if Yes)</i>
This document has not expired 12 months beyond the issue date.		
SWI details and protection arrangements have been reviewed and validated for the assessed worksite location, including: <ul style="list-style-type: none"> <li>• On-site safety assessment has been completed for relevancy of works being undertaken</li> <li>• The required protection details, environment and tasks are unchanged from the details of this SWI</li> <li>• All boxes have been ticked if applicable and crossed if not applicable</li> <li>• All fields have been completed</li> </ul>		
<b>Corridor Safety Number</b>	<b>Protection Officer Signature</b>	<b>Date</b>

**Warning**



*If an above item does not apply, the Protection Officer must not use this Safe Work Instruction. A new worksite protection plan must be completed in accordance with NRF 014 Worksite Protection Pre-work briefing and NRF 015 Worksite Protection Plan.*

# ATWS Worksite Protection for Medlow Bath condition and monitoring equipment maintenance

## Worksite Protection Pre-work Briefing

Briefing date: 

### Protection Officer details

<input type="text" value="name"/>	<input type="text" value="signature"/>	<input type="text" value="contact No."/>
-----------------------------------	--	--

Work location: Scope of work: Worksite protection:  Refer to Worksite Protection Plan for details

Hazards (e.g. Site specific hazards identified, including physical environment, human errors, plant and equipment)	Controls (to be implemented to eliminate or reduce the risk to the lowest practicable level)	Person responsible for Control
<b>Crossing live lines</b>	A qualified Protection Officer (PO) or Access Corridor Safety (ACS) must make a safety assessment to cross live lines in accordance with NGE200 and supervise workers who do not hold the PO or ACS qualification.	Qualified PO/ACS
<b>Accessing Danger Zone to conduct plate test</b>	Use appropriate safety measures as validated by a PO. Refer to diagram for minimum safety assessment.	Qualified PO
<b>Electricity</b>	ATWS antennae not to encroach safe approach distance to overhead wiring	Operator
<b>Slips, trips, falls carrying ATWS equipment</b>	Use correct manual handling techniques, secure safety boots, clear obstacles for work area and agree a safe path.	All
<b>Approaching rail traffic</b>	Lookout Working using approved ATWS as assessed in the plan & diagram. All points of entry have been validated and ATWS safety measures (sensors) have been installed. Confirm with the Operator that the ATWS has been tested and is operational. Workers immediately move to the designated safe place when warned. Provide ALL CLEAR handsignal after workers and equipment are in a safe place. After the warning has been cancelled, confirm there is no approaching rail traffic between the sensors and the worksite before allowing work to resume.	PO
<b>Ineffective ATWS warnings / Adjoining / surrounding worksites</b>	Test and confirm workers can see and hear the warning in the noisiest environment. Explain the emergency warnings. Workers to be within 50m of warning device. Workers to remain within sight and hearing of warning unit at all times. Radios not to be used near ATWS.	PO
<b>Train warning time longer than expected (stopping points or ATWS equipment fault)</b>	Workers to remain in a safe place until confirmed the ATWS is working correctly. Contact the Signaller or visually confirm the line is clear between the sensors and the worksite.	PO
<b>Adjacent live lines</b>	Remain within the tracks being protected by the ATWS	PO
<b>Second train warning cancelled in error</b>	Nominate a team member to confirm with the Operator when each rail traffic has completely passed the worksite. Tell the PO and workers about the second train warning. Cancel each warning after each train has completely passed the worksite.	Operator / nominated team member
<b>Distraction</b>	Obtain permission from PO to use electronic devices in the Danger Zone.	All
<b>Obstructions to safe place</b>	Agree on paths to reach designated safe places from the worksite.	PO
<b>Electrical storms</b>	Stop work immediately	All

# ATWS Worksite Protection for Medlow Bath condition and monitoring equipment maintenance

Hazards (e.g. Site specific hazards identified, including physical environment, human errors, plant and equipment)	Controls (to be implemented to eliminate or reduce the risk to the lowest practicable level)	Person responsible for Control

**Safe Work Instruction**

**ATWS Worksite Protection for Medlow Bath condition and monitoring equipment maintenance**



**Workplace Supervisor details**

<input type="text"/> name	<input type="text"/> contact No.
Emergency assembly point: <input type="text"/>	SWMS/SWI Ref #: <input type="text"/>
First aid kit location: <input type="text"/>	First aider: <input type="text"/>

**Workplace Supervisor acknowledgement**

The Workplace Supervisor acknowledges that all identified WHS and rail safety hazards have the appropriate controls in place to manage and/or eliminate the hazards.

Yes   signature

**Participant Acknowledgement**

**NOTE: Recipients of the briefing are to question the Briefer if they don't understand any part of this briefing.**

All workers listed below acknowledge that they:

- |   |  |
|---|--|
| <ol style="list-style-type: none"> <li>1. have been inducted to the site</li> <li>2. are free from alcohol and drugs</li> <li>3. are free from the effects of fatigue</li> <li>4. hold the applicable and current Rail Safety Worker Authorisation, trade licence and/or induction record e.g. Construction Industry Induction</li> <li>5. must wear the appropriate Personal Protective Equipment (PPE)</li> </ol> | <ol style="list-style-type: none"> <li>6. have been briefed on the contents of the Worksite Protection Plan</li> <li>7. have been shown the Worksite Protection Plan diagram</li> <li>8. understand the kinds and limits of worksite protection in place</li> <li>9. have been briefed about any new hazards and controls identified during the final site inspection (<i>final site inspection must be conducted immediately before commencing work</i>)</li> </ol> |
|---|--|

Mark each check box below with a tick  if the item applies or a cross  if the item does not apply.

- |  |   |
|--|---|
| <input type="checkbox"/> have been informed of the requirements of the electrical permit (if required)<br><input type="checkbox"/> have been briefed on the SWMS/SWIs/documentated safe work practice for the job<br><input type="checkbox"/> have been instructed in the controls recorded in this document and SWMS/SWIs | <input type="checkbox"/> have been made aware of any hazardous materials/substances on site<br><input type="checkbox"/> have been briefed on Safety Data Sheets (SDS)<br><input type="checkbox"/> have been briefed on the WHS Management plan<br><input type="checkbox"/> have been briefed on the hazards of adjoining worksites/processes. |
|--|---|

Name	Signature	Time of briefing: hh:mm	Amendment briefing: hh:mm and initial

Safe Work Instruction

ATWS Worksite Protection for Medlow Bath condition and monitoring equipment maintenance



Worksite Protection Plan – Lookout Working

Signaller details

<input type="text" value="name"/>	<input type="text" value="Katoomba Panel"/>	<input type="text" value="9851 7401"/>
<input type="text" value="name"/>	<input type="text" value="Mt Victoria Panel"/>	<input type="text" value="6354 9837"/>

Protection Officer details

<input type="text" value="name"/>	<input type="text" value="signature"/>	<input type="text" value="contact No."/>
<input type="text" value="RSW or RIW No."/>	<input type="text" value="designation"/>	Planned duration <input type="text"/>

Workplace Supervisor details:

Type of work:

**Worksite location**

On the

between  and

On the

between  and

Worksite Assessment

Has the Lookout Working Prohibited Locations Register been consulted? Yes

Warning method

Minimum Warning Time Calculations

Maximum track speed

Number of ATWS Sensors used  Position of ATWS Sensors  and

<input type="text" value="7 sec"/>	+	<input type="text" value="3 sec"/>	+	<input type="text" value="10 sec"/>	= Minimum Warning Time (MWT) (S+M+10 sec = MWT)	<input type="text" value="20 sec"/>	<input type="text" value="115 km/h"/>	<input type="text" value="639 metres"/>	<input type="text" value="Up Main"/>
<input type="text" value="7 sec"/>	+	<input type="text" value="3 sec"/>	+	<input type="text" value="10 sec"/>		<input type="text" value="20 sec"/>	<input type="text" value="100 km/h"/>	<input type="text" value="556 metres"/>	<input type="text" value="Down Main"/>
<i>See Time (S)</i>		<i>Move Time (M)</i>				<i>Track speed</i>	<i>Minimum Sighting Distance as calculated</i>		

Where are the safe places identified for the ATWS Operator, Lookouts and workers?

Lookouts:

Workers:

Confirm mandatory first train tests were completed for all sensors Yes

Ensure the workers have been briefed about these work details Yes

NOTE: Diagrams and instructions that follow form part of this worksite protection plan.

# ATWS Worksite Protection for Medlow Bath condition and monitoring equipment maintenance

## ATWS Check-sheet

### Planning

#### 1. How will the installed location of sensor(s) be verified?

- The PO will have direct line of sight to the sensor from the worksite location
- The installer will travel from the sensor location to the worksite location on the same side of track
- The ID no. of the first train will be verified between the operator and installer

Train ID # observed:

Verified by installer:  (tick to confirm)

### Testing

#### 2. Record evidence of mandatory First Trains Tests:

- a. Record Train ID # or type of train observed for all sensors:

- b. Confirm mandatory first train tests are complete for all sensors installed  (tick to confirm)

### Pre-work Briefing

#### 3. Identify potential stopping points affecting warning times:

Record any potential stopping points e.g. (stations or signals) between the sensor(s) and worksite which could cause variable warning times:


N/A

Note: Factors affecting warning times should be highlighted to staff during the pre-work brief

# ATWS Worksite Protection for Medlow Bath condition and monitoring equipment maintenance

Tick if used

Worksite on Up & Down Main lines

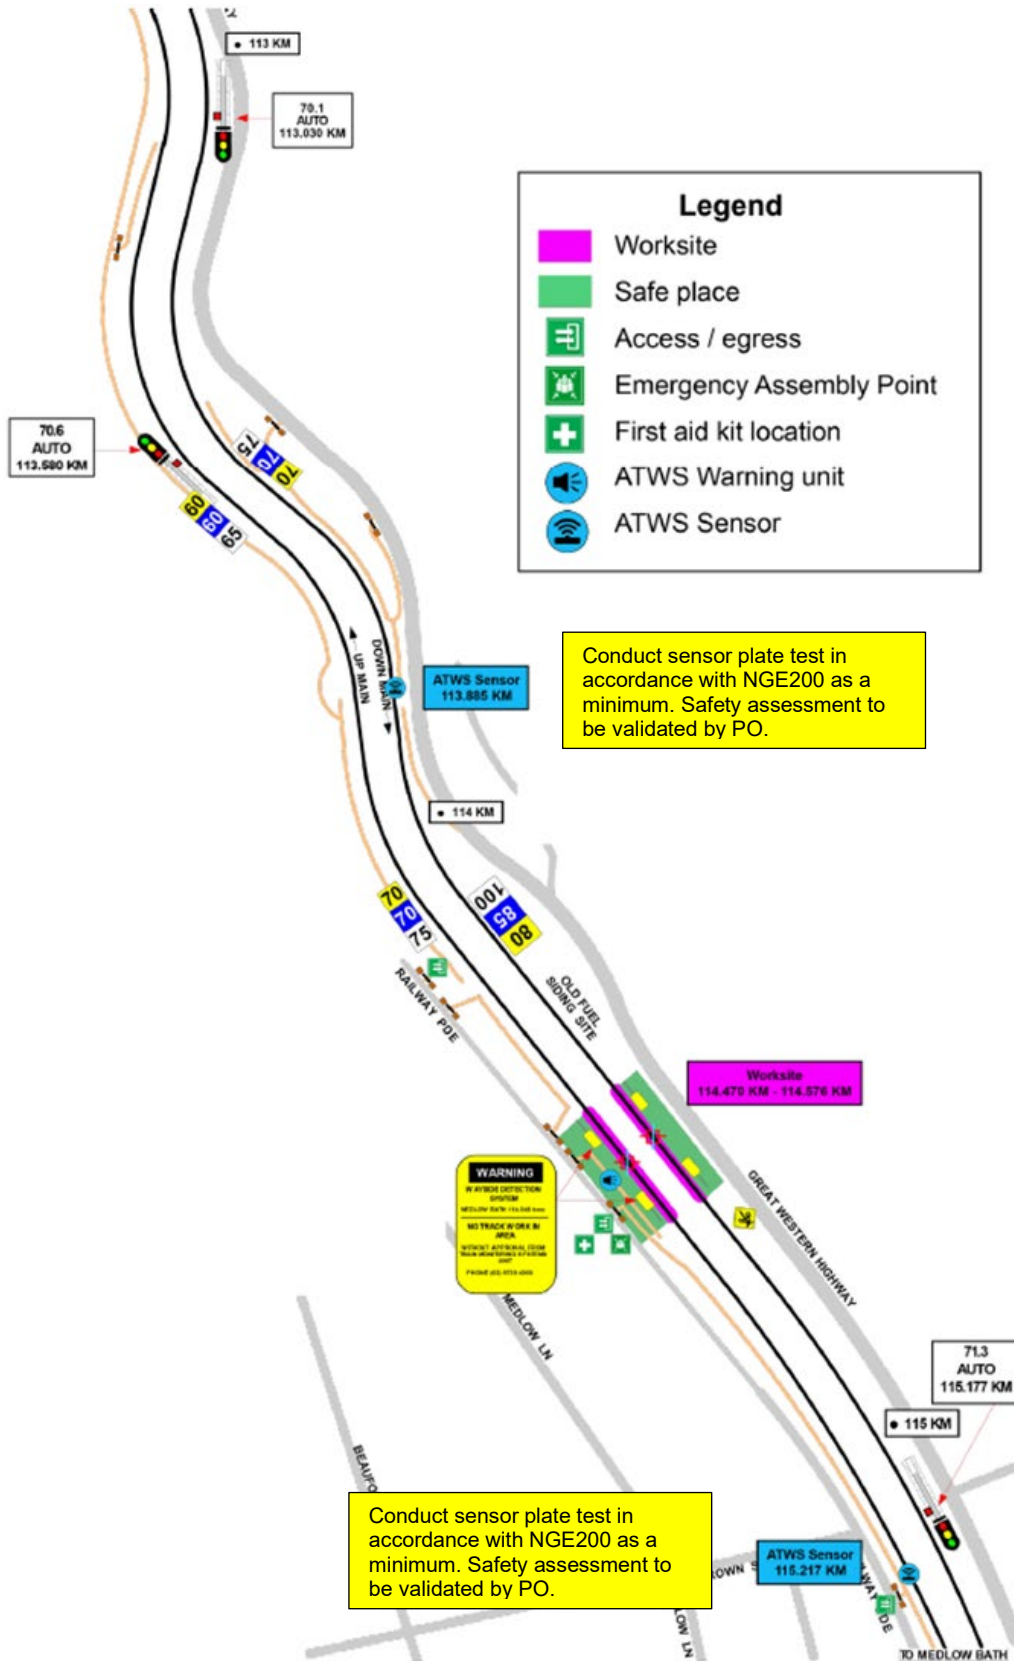




# ATWS Worksite Protection for Medlow Bath condition and monitoring equipment maintenance

Tick if used


Worksite on Up Main line

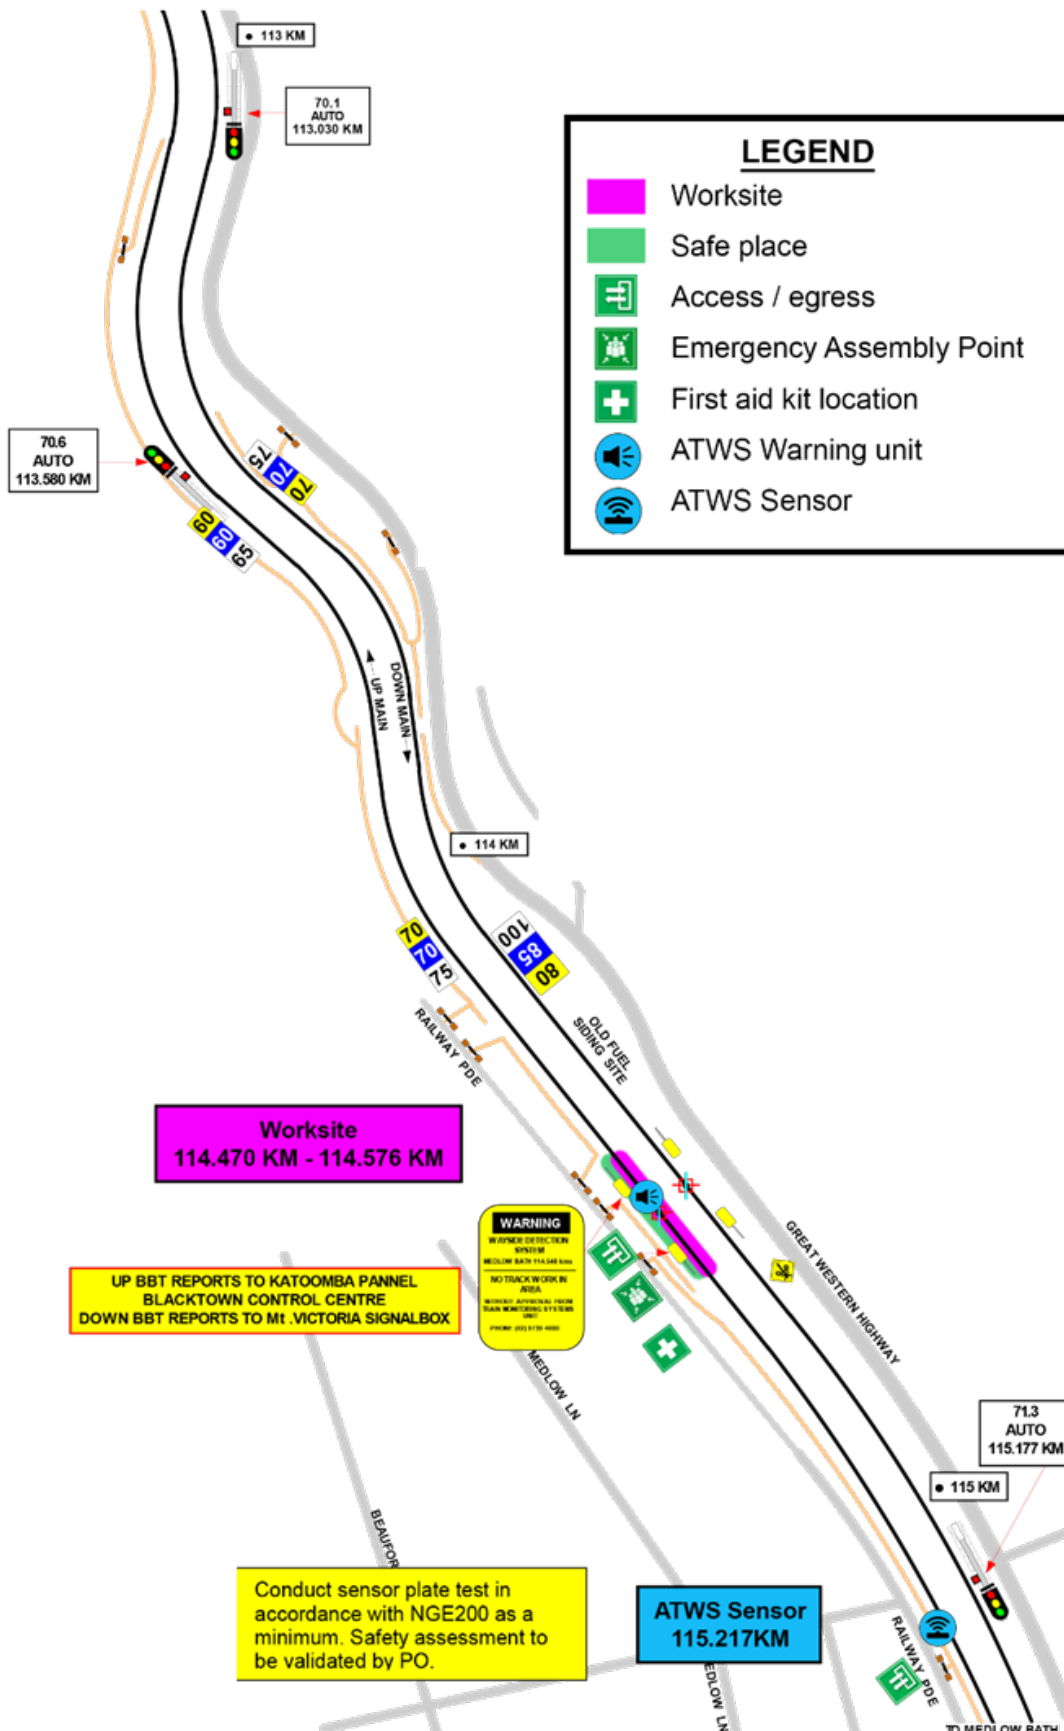

# ATWS Worksite Protection for Medlow Bath condition and monitoring equipment maintenance

Tick if used

Worksite on Down Main line

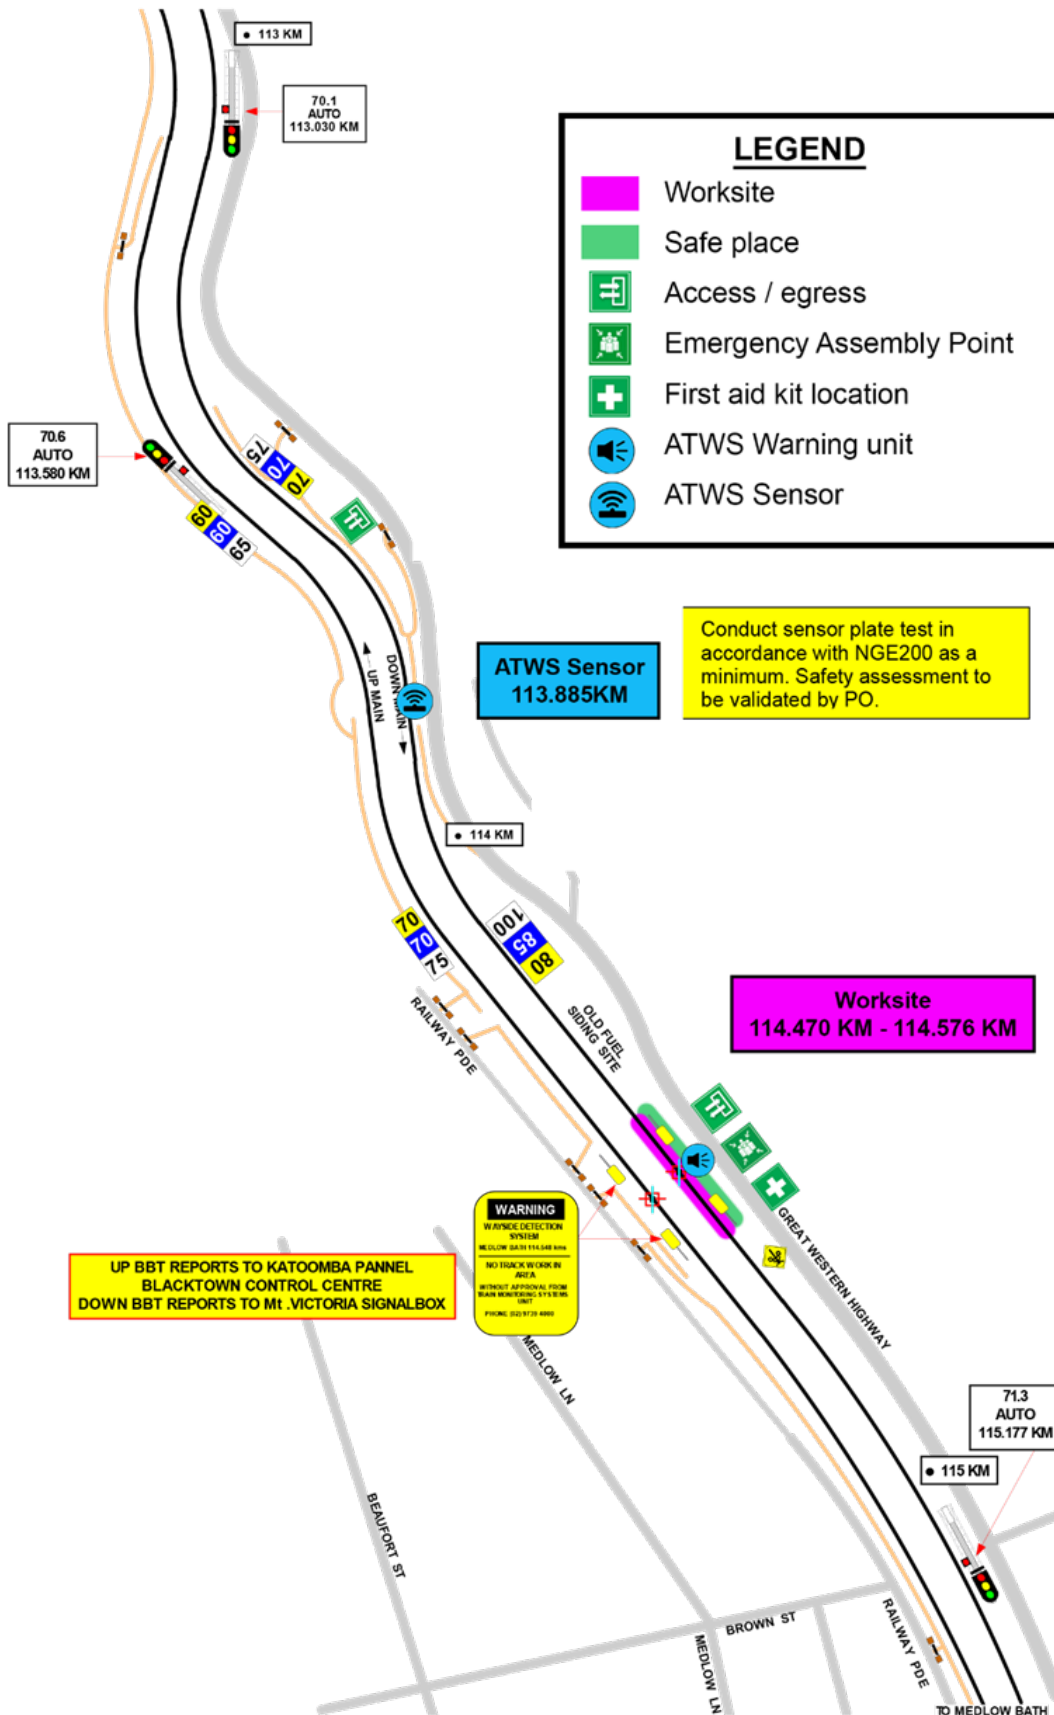

# ATWS Worksite Protection for Medlow Bath condition and monitoring equipment maintenance

INSTRUCTIONS:	<ol style="list-style-type: none"> <li>Workers enter the rail corridor via access gate <b>W00 114.655 U</b>.</li> <li>Use assets to validate worksite location on <b>Up Main and Down Main lines between 114.470 km to 114.576 km</b></li> <li>Conduct WP Pre-work briefing to set-up ATWS.</li> <li>Tell Signaller at Katoomba Panel about the use of lookout working with ATWS if applicable.</li> <li>Tell Signaller at Mt Victoria Panel about the use of lookout working with ATWS if applicable.</li> </ol>
Tick if used <input type="checkbox"/>	<ol style="list-style-type: none"> <li>Access <b>Up Cess 115.217 km</b>, verify sensor label &amp; connect to sensor cable, calibrate with test plate, connect and turn on the transmitter.</li> </ol>
Tick if used <input type="checkbox"/>	<ol style="list-style-type: none"> <li>Access <b>Dn Cess 113.885 km</b>, verify sensor label, connect to sensor cable, calibrate with test plate, connect and turn on transmitter.</li> </ol>
	<ol style="list-style-type: none"> <li>Place warning system on same side of tracks if working on one track only within sight &amp; hearing of workers, conduct siren &amp; light self test, &amp; connect to transmitter(s).</li> <li>Record first rail traffic movement test for each sensor on ATWS Check-sheet.</li> <li>Conduct WP Pre-work briefing for lookout working with ATWS and confirm workers have seen and heard the warning.</li> <li>Start work when advised by the PO, and move to the designated safe place when warned.</li> <li>When work is complete, and workers and equipment are in a safe place, turn off and pack up warning unit</li> </ol>
Tick if used <input type="checkbox"/>	<ol style="list-style-type: none"> <li>Access Up Cess to turn off and pack up transmitter unit(s).</li> </ol>
Tick if used <input type="checkbox"/>	<ol style="list-style-type: none"> <li>Access Dn Cess to turn off and pack up transmitter unit(s).</li> </ol>
	<ol style="list-style-type: none"> <li>Access <b>Up Cess</b> for all workers to leave the rail corridor via access gate <b>W00 114.655 U</b>.</li> <li>Tell Signaller at <b>Katoomba Panel</b> when work is completed and the workers and their equipment are clear of the Danger Zone if applicable.</li> <li>Tell Signaller at <b>Mt Victoria Panel</b> when work is completed and the workers and their equipment are clear of the Danger Zone if applicable.</li> </ol>

Tick if used <input type="checkbox"/>	<b>Position of ATWS transmitter and sensor on Up Main line at 115.217 KM</b>
---------------------------------------	--



Image 1: Sensor and transmitter installation location



Image 2: Sensor access using access gate W00 115.175 U

Tick if used <input type="checkbox"/>	<b>Position of ATWS transmitter and sensor on Down Main line at 113.885 KM</b>
---------------------------------------	--

# ATWS Worksite Protection for Medlow Bath condition and monitoring equipment maintenance



Image 1: Sensor and transmitter installation location



Image 2: Sensor access using access gate W00 114.174 U



## ATWS Worksite Protection for Medlow Bath condition and monitoring equipment maintenance

*(This page is optional and may be separated and given to the assigned operator to assist set-up of ATWS equipment. Refer also to Refer to "D2015-45354 Wireless ATWS (Automatic Trak Warning System)" for detailed instructions.)*

### Setup Stage 1: Checklist for ATWS transmitter and sensor

Step	Task Description	Installer Check
1	Verify Track Label for location of sensor as per the Protection Diagram and Photos in this document	
2	Confirm equipment is within inspection date	
3	Sensor direction is per Worksite Protection Diagram and photos in this document	
4	Connect sensor cable to junction box	
5	Confirm all batteries are fully charged	
6	Connect junction box to ZFS using channel T1-T4	
7	Commence calibration and automatic self- test	
8	Perform function test using test plate	
9	Confirm transmitter booked in to correct T- channel (T1-T4)	
10	Select & confirm channel for the radio transmitter (AU3 or AU4)	
11	Perform worksite warning test using test plate	
12	Lock device & remove key	

### Setup Stage 2: checklist for ATWS worksite warning unit

Step	Task Description	Operator Check
1	Confirm equipment is within inspection date	
2	Confirm Audible level	
3	Confirm and set Radio Channel for Warning unit	
4	Book in ATWS sensor 1	
5	Book in ATWS sensor 2	
6	Perform Worksite Warning Test with all ATWS sensor	
7	Ensure the workers have seen the visual warning and heard the audible warning	
8	Select and Confirm Channel for the Radio Transmitter	
9	Confirm worksite warning unit is operational with Installers and advise them to lock devices & remove key	