ATWS Worksite Protection for Kingswood Condition Monitoring Equipment Maintenance

WORK DESCRIPTION	Routine Maintenance activities			
WPP Number	CMO1BWS 10178			
SCOPE:	Routine maintenance activities performed by Condition Monitoring Operations team. on the Up Main and Down Main lines between 51.791 km to 51.926 km that does not involve the use of tools or equipment, or using tools which can be easily and immediately removed from the track by one person and are light, non-powered hand tools, or light battery powered tools or devices.			
AUTHORISATIONS:	Protection Officer, ATWS Operator (Operator) & ATWS Installer (Installer): • Protection Officer (PO) Level 1 – 4, and • WATWS – Wireless Automatic Track Warning System			
PERSONAL PROTECTIVE EQUIPMENT	High visibility vest, boots, high visibility lookout sleeve			
SAFETY CONTROLS - Lookout Working (ATWS) arrangements:	 Automatic Track Warning System (ATWS) - provides visual and audible warning for workers ATWS sensor for Down Main direction running on the Down Main line at 51.125 km ATWS sensor for Up Main direction running on the Up Main line at 52.945 km IMPORTANT! This document must not be used to install or adjust the ATWS sensors All sensors in the plan and shown on the diagram must be connected to transmit a warning 			
PRESTART REQUIREMENTS:	Refer to D2015-45354 Wireless ATWS (Automatic Track Warning System) to install or remove sensors			
FURTHER INFORMATION:	Refer to "D2015-45354 Wireless ATWS (Automatic Track Warning System)" for detailed instructions to set-up, connect, test and operate the ATWS system with pre-installed ATWS sensors			

Required ATWS Equipment				
Item Description Quantity				
Aerial	Telescopic Aerial	3		
Assembly Kit	Orange Bag with Tools	1		
Battery ZA24-2.9	Small battery for Junction Box & Transmitter	4		
Device Frame Protective Frame		3		



Version: 1.0 Issue Date: 10/12/2025 Page 1 of 12

SWI Custodian: Condition Monitoring Operations Manager SWI Approver: Assoc Dir Operational Tech

ATWS Worksite Protection for Kingswood Condition Monitoring Equipment Maintenance
OYT4

F500-AB Junction Box	Receiver Device	2
F500-SEN Train Sensor	Sensor	2
Housing for Aerial	Housing for Telescopic Aerial	3
KF5-5 Extension Cable	Extension Cable (5m) for F500-SEN to F500-AB	0
Mobile Backpack	Harness for Device	0
Pouch	Pouch for small battery	2
Tripod	Tripod for Device	3
ZFS Radio Transmitter	Radio Transmitter Device	2
ZPW Warning Unit	Control & Warning Device	1

Protection Officer/Operator assessment checklist		
Protection Officer's name:	Yes (Tick if Yes)	
This document has not expired 12 months beyond the issue date.		
SWI details and protection arrangements have been reviewed and validated for the assessed worksite location, including:		
 On-site safety assessment has been completed for relevancy of works being undertaken The required protection details, environment and tasks are unchanged from the details of this SWI All boxes have been ticked if applicable and crossed if not applicable All fields have been completed 		

Corridor Safety Number	Protection Officer Signature	Date



Warning:

If an above item does not apply, the Protection Officer must not use this Safe Work Instruction. A new worksite protection plan must be completed in accordance with NRF 014 Worksite Protection Pre-work briefing and NRF 015 Worksite Protection Plan.



ATWS Worksite Protection for Kingswood Condition Monitoring Equipment Maintenance

Worksite Protection Pre-work Briefing

			Briefing date:	/ /
Protection Officer d	etails			
	name	signat	ure	contact no.
Work location:				
Scope of work:				
Worksite protection:	Lookout Working (ATWS)	1	Refer to Worksite P	rotection Plan for details

l comone protection	LOOKOUT WORKING (ATWS)	Refer to Worksite Protection Plan for det	alis	
Hazards (e.g. environment, plar equipment, human err		the risk to the lowest practicable level)	Person responsible for Control	
Crossing live lines		A qualified Protection Officer (PO) or Access Corridor Safety (ACS) must make a safety assessment to cross live lines in accordance with NGE200 and supervise workers who do not hold the PO or ACS qualification.		
Accessing Danger Zor conduct plate test	Use appropriate safety measures as valida safety assessment.	ted by a PO. Refer to diagram for minimum	Qualified PO	
Electricity	ATWS antennae not to encroach safe appr	oach distance to overhead wiring	Operator	
Slips, trips, falls carry ATWS equipment	Use correct manual handling techniques, s area and agree a safe path.	ecure safety boots, clear obstacles for work	All	
Approaching rail traff		Lookout Working using approved ATWS as assessed in the plan & diagram. All points of entry have been validated and ATWS safety measures (sensors) have been installed.		
		nated safe place when warned. orkers and equipment are in a safe place. onfirm there is no approaching rail traffic		
Ineffective ATWS war Adjoining / surroundin worksites	Toot and confirm workers can acc and be		PO	
Train warning time lor than expected (stoppi points or ATWS equip fault)	ng Contact the Signaller or visually confirm the worksite.	Potential stopping points: Up Main - Kingswood station platform 1 & 32.6 auto signal		
Adjacent live lines	Remain within the tracks being protected by	by the ATWS	PO	
Second train warning cancelled in error	 Nominate a team member to confirm with completely passed the worksite. Tell the PO and workers about the secon Cancel each warning after each train 	·	Operator / nominated team member	
Distraction	Obtain permission from PO to use electron	Obtain permission from PO to use electronic devices in the Danger Zone.		
Obstructions to safe p	Agree on paths to reach designated safe p	laces from the worksite.	PO	
Electrical storms	Stop work immediately		All	

	A final site inspection has been conducted immediately before commencing work, and any new hazards and controls have been
J	included.



Version: 1.0 Issue Date: 10/12/2025 Page 3 of 12 ATWS Worksite Protection for Kingswood Condition Monitoring Equipment Maintenance

ATWO Worksite i Totection for Kingswood Condition Monitoring Equipment Mair	teriarice
	OYT4

Workplace Supervisor details		
name	signature	contact no.

Yes	the Workplace Supervisor acknowledges that the Protection Officer will arrange worksite protection as
	required.

Participant acknowledgement

NOTE: Recipients of the briefing are to question the Briefer if they don't understand any part of this briefing.

All workers listed below acknowledge that they:

- 1. hold the applicable and current Rail Safety Worker Authorisation
- 2. have been briefed on the identified hazards and controls
- 3. have been briefed on the risks from adjacent lines and/or worksites
- 4. have been briefed on the planned worksite protection
- 5. understand the limits of the worksite
- 6. have been briefed on the contents of the Worksite Protection Plan
- 7. have been shown the worksite protection diagram or map

Name	Signature	Time of briefing: hh:mm	Amendment briefing: hh:mm and initial
	Oignature	hh:mm	hh:mm and initial
text			



Version: 1.0 Issue Date: 10/12/2025 Page 4 of 12

Worksite Protection Plan - Lookout Working

Signaller detai				Dor	nrith Panel		02 4780 38
Protection Offi	ioor dotails			St Mi	arys Panel		02 9851 72
Totection Offi	icei detaits	name			signature		contac
					0181141410		
	RSW or F	RIW No.		(designation	Planned duration	
Workplace Sup	pervisor details:						
Type of work:	Routine Maintenance Activities						
Worksite loc	cation						
On the		Up Main line					
between	3	2.6 Auto Signal		and		32.0 Auto Signal	
On the	Down Main line						
between	3	2.1 Auto Signal		and		32.5 Auto Signal	
Worksite Asse The Lookout Wor Warning metho ATWS	king Prohibited Loc	ations Register be	en consulted	Yes "			
	ning Time Calculated	ations 115 km/h					
lumber of ATWS Se	ensors used	1/	2	n of ATWS nsors	51.125 k	m and 52.945 l	km
7 sec +	3 sec +	10 sec = Mini	mum Warning Time	20 sec	115 km/h	639 metres	Up Main line
7 sec +	3 sec +	10 sec	(MWT)	20 sec	115 km/h	639 metres D	own Main line
	14 Time - (14)	Safe Time (S+M-	+10 sec = MWT)		Track speed	Minimum Sighting Distance as calculated	
See Time (S)	Move Time (M)						
	e safe places io	lentified for th	ne ATWS Op	erator, Lo	ookouts and w	vorkers?	
	e safe places id	lentified for th	ne ATWS Op	erator, Lo	ookouts and w	vorkers?	

Ata

Ensure the workers have been briefed about these work details

NOTE: Diagrams and instructions that follow form part of this worksite protection plan.

Version: 1.0 Issue Date: 10/12/2025 Page 5 of 12

Yes "

ATWS Check-sheet


Planning
1. How will the installed location of sensor(s) be verified? The PO will have direct line of sight to the sensor from the worksite location The installer will travel from the sensor location to the worksite location on the same side of track The ID no. of the first train will be verified between the operator and installer Train ID # observed: Verified by installer: (tick to confirm)
Testing
2. Record evidence of mandatory First Trains Tests: a. Record Train ID # or type of train observed for all sensors:
b. Confirm mandatory first train tests are complete for all sensors installed \Box (tick to confirm)
Pre-work Briefing
3. Identify potential stopping points affecting warning times:
Record any potential stopping points e.g. (stations or signals) between the sensor(s) and worksite which could cause variable warning times:
Up Main – Kingswood platform 1 & 32.6 auto signal Down Main – 32.1 auto signal

Note: Factors affecting warning times should be highlighted to staff during the pre-work brief




UNCONTROLLED COPY WHEN PRINTED


Tick if used □

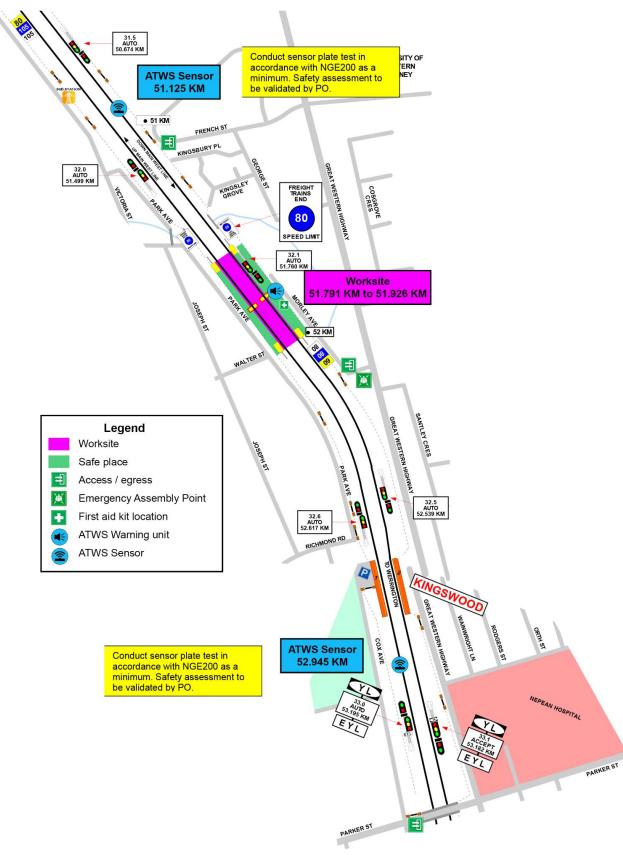



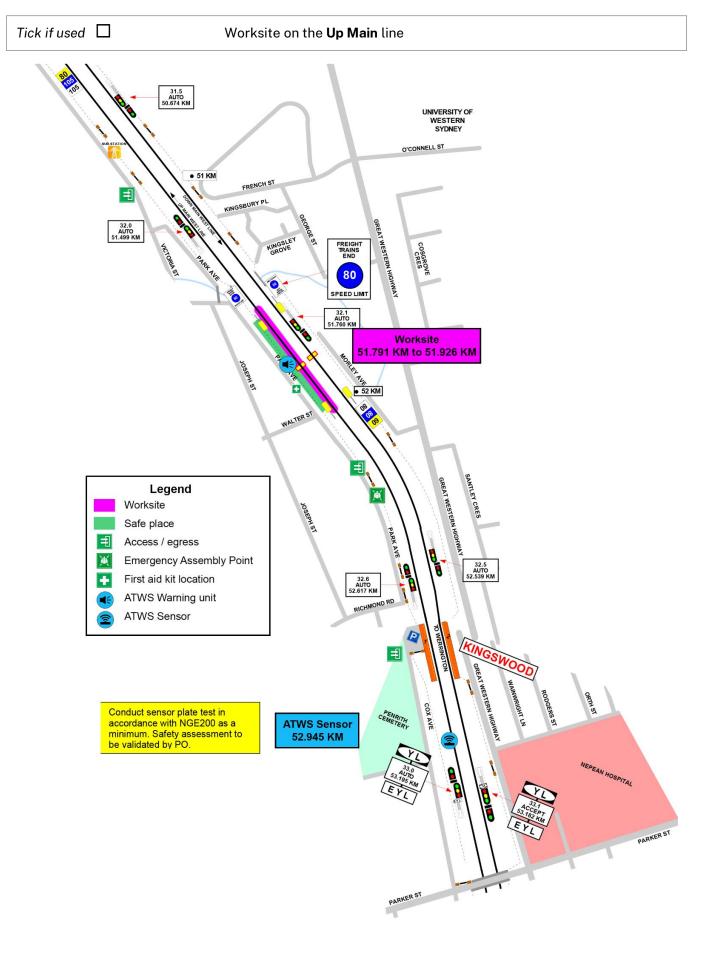



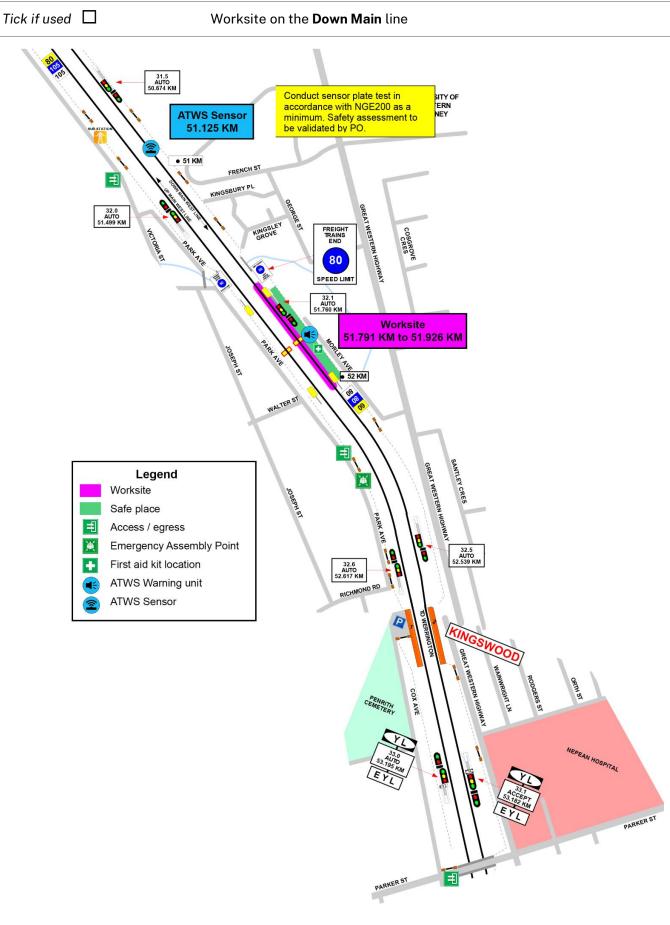



Version: 1.0 Issue Date: 10/12/2025 Page 9 of 12

INSTRUCTIONS:	Workers enter the rail corridor via access gate W00 52.283 U .
	Use assets to validate worksite location on Up Main and Down Main lines between 51.791 km to 51.926 km
	Conduct WP Pre-work briefing to set-up ATWS.
	Tell Signaller at Penrith Panel about the use of lookout working with ATWS if applicable.
	Tell Signaller at St Marys Panel about the use of lookout working with ATWS if applicable
Tick if used □	Access Up Cess 52.945 km, verify sensor label & connect to sensor cable, calibrate with test plate, connect and turn on the transmitter.
Tick if used □	Access Dn Cess 51.125 km, verify sensor label, connect to sensor cable, calibrate with test plate, connect & turn on transmitter.
	Place warning system on same side of tracks if working on one track only within sight & hearing of workers, conduct siren & light self-test, & connect to transmitter(s).
	Record first rail traffic movement test for each sensor on ATWS Check-sheet.
	Conduct WP Pre-work briefing for lookout working with ATWS and confirm workers have seen and heard the warning.
	Start work when advised by the PO and move to the designated safe place when warned.
	When work is complete, and workers and equipment are in a safe place, turn off and pack up warning unit
Tick if used □	Access Dn Cess to turn off and pack up transmitter unit(s).
Tick if used □	Access Up Cess to turn off and pack up transmitter unit(s).
	Access Up Cess for all workers to leave the rail corridor via access gate W00 52.283 U .
	Tell Signaller at Penrith Panel when work is completed and the workers and their equipment are clear of the Danger Zone and End Lookout Working if applicable.
	Tell Signaller at St Marys Panel when work is completed and the workers and their equipment are clear of the Danger Zone and End Lookout Working if applicable.



Version: 1.0 Issue Date: 10/12/2025 Page 10 of 12

Tick if used □

Position of ATWS transmitter and sensor on the Up Main line at 53.945 KM





Image 1: Sensor and transmitter installation location

Image 2: Sensor access using access gate at the end of Kingswood Station carpark

Tick if used □

Position of ATWS transmitter and sensor on the **Down Main** line at **51.125** KM





Image 1: Sensor and transmitter installation location

Image 2: Sensor access using access gate W00 51.306 U



UNCONTROLLED COPY WHEN PRINTED

Version: 1.0 Issue Date: 10/12/2025 Page 11 of 12

WPP ATWS OUTSIDE YARD SAFE WORK INSTRUCTION

ATWS Worksite Protection for Kingswood Condition Monitoring Equipment Maintenance

Protection Officer's diary

Date	Time	Notes



Version: 1.0 Issue Date: 10/12/2025 Page 12 of 12